


LNE-SM-G 软管接头

Standard Straight Connector For Flexible Conduit



技术参数

产品材质	PA尼龙
工作温度	-40°C至+100°C
螺纹规格	公制 (M)
产品颜色	黑色、灰色 (特殊颜色可以定做)。
产品特性	内锁扣和本体特殊设计, 装卸只需拔插无需工具。

RoHS

Technical Parameters

Product material	PA (polyamide)
Working temperature	-40°C ~ +100°C
Specification of thread	Metric
Structure	Corrugated both inner & outer.
Color	Black, grey, Other colors are customizable
Property	Special design of inner locking buckle make the mounting and dismounting done only by plugging or pulling, without using tools.

订货号*黑色 Order No. Black No.	订货号*灰色 Order No. Grey No.	适配软管 Suitable Flexible Conduit AD	螺纹标准(公制) Thread standard(M) M	外径 (mm) Outer Diameter AG	内径 (mm) Inner Diameter AG	mm GL	mm H	包装单位(只/包) Packaging Unit PCS
LNE-SM-G-M10-10B	LNE-SM-G-M10-10G	AD10.0	M10×1.0	10.0	6.5	10.0	23.0	100
LNE-SM-G-M12-10B	LNE-SM-G-M12-10G	AD10.0	M12×1.5	12.0	6.5	10.0	25.0	100
LNE-SM-G-M16-10B	LNE-SM-G-M16-10G	AD10.0	M16×1.5	16.0	6.5	10.0	25.0	100
LNE-SM-G-M10-11.6B	LNE-SM-G-M10-11.6G	AD11.6	M10×1.0	10.0	8.0	10.0	23.0	100
LNE-SM-G-M12-11.6B	LNE-SM-G-M12-11.6G	AD11.6	M12×1.5	12.0	8.0	10.0	25.0	100
LNE-SM-G-M12-13B	LNE-SM-G-M12-13G	AD13.0	M12×1.5	12.0	7.5	11.0	25.0	100
LNE-SM-G-M16-13B	LNE-SM-G-M16-13G	AD13.0	M16×1.5	16.0	10.0	10.0	25.0	100
LNE-SM-G-M18-13B	LNE-SM-G-M18-13G	AD13.0	M18×1.5	18.0	10.0	10.0	25.0	100
LNE-SM-G-M20-13B	LNE-SM-G-M20-13G	AD13.0	M20×1.5	20.0	10.0	10.0	25.0	100
LNE-SM-G-M16-15.8B	LNE-SM-G-M16-15.8G	AD15.8	M16×1.5	16.0	11.5	10.0	27.5	100
LNE-SM-G-M18-15.8B	LNE-SM-G-M18-15.8G	AD15.8	M18×1.5	18.0	12.0	10.0	27.5	100
LNE-SM-G-M20-15.8B	LNE-SM-G-M20-15.8G	AD15.8	M20×1.5	20.0	12.0	10.0	27.5	100
LNE-SM-G-M20-18.5B	LNE-SM-G-M20-18.5G	AD18.5	M20×1.5	20.0	14.3	12.0	28.0	50
LNE-SM-G-M20-21.2B	LNE-SM-G-M20-21.2G	AD21.2	M20×1.5	20.0	15.0	13.0	31.5	50
LNE-SM-G-M24-21.2B	LNE-SM-G-M24-21.2G	AD21.2	M24×1.5	24.0	18.0	13.0	31.5	50
LNE-SM-G-M25-21.2B	LNE-SM-G-M25-21.2G	AD21.2	M25×1.5	25.0	17.0	13.0	27.0	50
LNE-SM-G-M25-25B	LNE-SM-G-M25-25G	AD25.0	M25×1.5	25.0	19.5	14.0	29.0	50
LNE-SM-G-M25-28.5B	LNE-SM-G-M25-28.5G	AD28.5	M25×1.5	25.0	20.0	14.0	34.0	50
LNE-SM-G-M27-28.5B	LNE-SM-G-M27-28.5G	AD28.5	M27×2.0	27.0	20.5	14.0	34.0	50
LNE-SM-G-M30-28.5B	LNE-SM-G-M30-28.5G	AD28.5	M30×2.0	30.0	22.0	14.0	34.0	50
LNE-SM-G-M32-28.5B	LNE-SM-G-M32-28.5G	AD28.5	M32×1.5	32.0	22.0	14.0	34.0	50
LNE-SM-G-M32-34.5B	LNE-SM-G-M32-34.5G	AD34.5	M32×1.5	32.0	27.0	14.0	36.0	20
LNE-SM-G-M36-34.5B	LNE-SM-G-M36-34.5G	AD34.5	M36×2.0	36.0	29.0	14.0	36.0	20
LNE-SM-G-M40-34.5B	LNE-SM-G-M40-34.5G	AD34.5	M40×1.5	40.0	29.0	14.0	36.0	20
LNE-SM-G-M40-42.5B	LNE-SM-G-M40-42.5G	AD42.5	M40×1.5	40.0	34.0	14.0	38.0	10
LNE-SM-G-M42-42.5B	LNE-SM-G-M42-42.5G	AD42.5	M42×1.5	42.0	36.0	14.0	38.0	10
LNE-SM-G-M48-42.5B	LNE-SM-G-M48-42.5G	AD42.5	M48×2.0	48.0	36.0	14.0	38.0	10
LNE-SM-G-M50-54.5B	LNE-SM-G-M50-54.5G	AD54.5	M50×1.5	50.0	44.0	15.5	39.0	10
LNE-SM-G-M60-54.5B	LNE-SM-G-M60-54.5G	AD54.5	M60×2.0	60.0	48.0	15.5	39.0	10
LNE-SM-G-M63-54.5B	LNE-SM-G-M63-54.5G	AD54.5	M63×1.5	63.0	48.0	15.5	39.0	10

技术参数

产品材质	PA尼龙
工作温度	-40°C至+100°C
螺纹规格	德制 (PG)、英制 (G)
产品颜色	黑色、灰色 (特殊颜色可以定做)。
产品特性	内锁扣和本体特殊设计, 装卸只需拔插无需工具。


RoHS

Technical Parameters

Product material	PA (polyamide)
Working temperature	-40°C ~ +100°C
Specification of thread	PG, G
Structure	Corrugated both inner & outer.
Color	Black, grey, Other colors are customizable
Property	Special design of inner locking buckle make the mounting and dismounting done only by plugging or pulling, without using tools.

Standard Straight Connector For Flexible Conduit

LNE-SM-G 软管接头




订货号*黑色 Order No. Black No.	订货号*灰色 Order No. Grey No.	适配软管 Suitable Flexible Conduit AD	螺纹标准(德制) Thread standard(PG) PG	外径 (mm) Outer Diameter AG	内径 (mm) Inner Diameter AG	mm GL	mm H	包装单位(只/包) Packaging Unit PCS
LNE-SM-G-PG7-10B	LNE-SM-G-PG7-10G	AD10.0	PG7	12.5	6.5	10.0	23.0	100
LNE-SM-G-PG7-11.6B	LNE-SM-G-PG7-11.6G	AD11.6	PG7	12.5	8.0	10.0	23.0	100
LNE-SM-G-PG9-13B	LNE-SM-G-PG9-13G	AD13.0	PG9	15.2	10.0	10.0	25.0	100
LNE-SM-G-PG11-15.8B	LNE-SM-G-PG11-15.8G	AD15.8	PG11	18.6	12.0	10.0	27.0	100
LNE-SM-G-PG13.5-15.8B	LNE-SM-G-PG13.5-15.8G	AD15.8	PG13.5	20.4	12.5	10.0	28.0	100
LNE-SM-G-PG13.5-18.5B	LNE-SM-G-PG13.5-18.5G	AD18.5	PG13.5	20.4	14.3	12.0	28.0	50
LNE-SM-G-PG16-21.2B	LNE-SM-G-PG16-21.2G	AD21.2	PG16	22.5	17.0	13.0	32.0	50
LNE-SM-G-PG21-28.5B	LNE-SM-G-PG21-28.5G	AD28.5	PG21	28.3	23.0	14.0	34.0	50
LNE-SM-G-PG29-34.5B	LNE-SM-G-PG29-34.5G	AD34.5	PG29	37.0	29.0	14.0	36.0	20
LNE-SM-G-PG36-42.5B	LNE-SM-G-PG36-42.5G	AD42.5	PG36	47.0	36.0	14.0	38.5	10
LNE-SM-G-PG48-54.5B	LNE-SM-G-PG48-54.5G	AD54.5	PG48	59.3	48.0	15.0	40.0	10

订货号*黑色 Order No. Black No.	订货号*灰色 Order No. Grey No.	适配软管 Suitable Flexible Conduit AD	螺纹标准(英制) Thread standard(G) G	外径 (mm) Outer Diameter AG	内径 (mm) Inner Diameter AG	mm GL	mm H	包装单位(只/包) Packaging Unit PCS
LNE-SM-G-G3/8-15.8B	LNE-SM-G-G3/8-15.8G	AD15.8	G3/8"	16.6	12.0	10.0	28.0	100
LNE-SM-G-G1/2-21.2B	LNE-SM-G-G1/2-21.2G	AD21.2	G1/2"	21.3	15.0	13.0	31.0	50
LNE-SM-G-G1/2-25B	LNE-SM-G-G1/2-25G	AD25.0	G1/2"	21.3	16.0	13.0	35.0	50
LNE-SM-G-G3/4-28.5B	LNE-SM-G-G3/4-28.5G	AD28.5	G3/4"	26.6	20.0	14.0	35.0	50
LNE-SM-G-G1-34.5B	LNE-SM-G-G1-34.5G	AD34.5	G1"	33.4	27.0	14.0	36.0	20
LNE-SM-G-G2-54.5B	LNE-SM-G-G2-54.5G	AD54.5	G2"	59.6	48.0	15.0	39.0	10

LNE-SM-F 软管防水接头

Waterproof Connector For Flexible Conduit

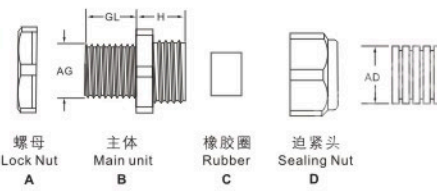

技术参数

产品材质	A, B, D部采用尼龙制成, C部采用丁腈橡胶制成。
工作温度	-40℃至+100℃, 短时可达120℃。
螺纹规格	公制 (M)
产品颜色	黑色、灰色 (特殊颜色可以定做)。
防护等级	IP65
产品特性	夹紧圈与密封件特殊的设计, 配合迫紧头装配省时便利, 夹紧软管范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。



Technical Parameters

Product material	A, B, D is made of nylon, C nitrile rubber.
Working temperature	-40℃ ~ +100℃, instantaneously can be +120℃.
Specification of thread	Metric
Color	Black, grey, Other colors are customizable
Protection grade	IP65
Property	with design of clamping ring and the rubber seal, tighten by sealing nut, can assembly fast & easy with large clamp range, tensile resistance, and waterproof, dustproof, resistant salt, acid and alkali, alcohol, oil, grease and general solvent.

订货号*黑色 Order No. Black No.	订货号*灰色 Order No. Grey No.	适配软管 Suitable Flexible Conduit AD	螺纹标准(公制) Thread standard(M) M	外径 (mm) Outer Diameter AG	内径 (mm) Inner Diameter AG	mm GL	mm H	包装单位(只/包) Packaging Unit PCS
LNE-SM-F-M12-10.0B	LNE-SM-F-M12-10.0G	AD10.0	M12×1.5	12.0	7.0	10.0	26.0	100
LNE-SM-F-M16-10.0B	LNE-SM-F-M16-10.0G	AD10.0	M16×1.5	16.0	7.0	10.0	26.0	100
LNE-SM-F-M12-13.0B	LNE-SM-F-M12-13.0G	AD13.0	M12×1.5	12.0	7.0	10.0	26.0	100
LNE-SM-F-M16-13.0B	LNE-SM-F-M16-13.0G	AD13.0	M16×1.5	16.0	10.0	10.0	26.0	100
LNE-SM-F-M18-13.0B	LNE-SM-F-M18-13.0G	AD13.0	M18×1.5	18.0	10.0	10.0	26.0	100
LNE-SM-F-M16-15.8B	LNE-SM-F-M16-15.8G	AD15.8	M16×1.5	16.0	11.0	10.0	26.0	100
LNE-SM-F-M18-15.8B	LNE-SM-F-M18-15.8G	AD15.8	M18×1.5	18.0	12.0	10.0	26.0	100
LNE-SM-F-M20-15.8B	LNE-SM-F-M20-15.8G	AD15.8	M20×1.5	20.0	12.0	10.0	26.0	100
LNE-SM-F-M20-18.5B	LNE-SM-F-M20-18.5G	AD18.5	M20×1.5	20.0	14.0	10.0	27.0	50
LNE-SM-F-M20-21.2B	LNE-SM-F-M20-21.2G	AD21.2	M20×1.5	20.0	16.0	10.0	27.0	50
LNE-SM-F-M22-21.2B	LNE-SM-F-M22-21.2G	AD21.2	M22×1.5	22.0	17.0	10.0	27.0	50
LNE-SM-F-M24-21.2B	LNE-SM-F-M24-21.2G	AD21.2	M24×1.5	24.0	18.0	10.0	27.0	50
LNE-SM-F-M25-21.2B	LNE-SM-F-M25-21.2G	AD21.2	M25×1.5	25.0	18.0	10.0	27.0	50
LNE-SM-F-M25-25.0B	LNE-SM-F-M25-25.0G	AD25.0	M25×1.5	25.0	20.0	15.0	35.0	50
LNE-SM-F-M25-28.5B	LNE-SM-F-M25-28.5G	AD28.5	M25×1.5	25.0	21.0	14.0	35.0	50
LNE-SM-F-M27-28.5B	LNE-SM-F-M27-28.5G	AD28.5	M27×2.0	27.0	21.0	14.0	35.0	50
LNE-SM-F-M30-28.5B	LNE-SM-F-M30-28.5G	AD28.5	M30×2.0	30.0	23.0	14.0	35.0	50
LNE-SM-F-M32-28.5B	LNE-SM-F-M32-28.5G	AD28.5	M32×1.5	32.0	23.0	14.0	35.0	50
LNE-SM-F-M32-34.5B	LNE-SM-F-M32-34.5G	AD34.5	M32×1.5	32.0	26.0	14.0	35.0	20
LNE-SM-F-M36-34.5B	LNE-SM-F-M36-34.5G	AD34.5	M36×2.0	36.0	29.0	14.0	35.0	20
LNE-SM-F-M40-42.5B	LNE-SM-F-M40-42.5G	AD42.5	M40×1.5	40.0	34.0	14.0	44.0	10
LNE-SM-F-M48-42.5B	LNE-SM-F-M48-42.5G	AD42.5	M48×2.0	48.0	36.0	14.0	44.0	10
LNE-SM-F-M50-54.5B	LNE-SM-F-M50-54.5G	AD54.5	M50×1.5	50.0	43.0	15.0	50.0	10
LNE-SM-F-M60-54.5B	LNE-SM-F-M60-54.5G	AD54.5	M60×2.0	60.0	48.0	15.0	50.0	10
LNE-SM-F-M63-54.5B	LNE-SM-F-M63-54.5G	AD54.5	M63×1.5	63.0	48.0	15.0	50.0	10

Waterproof Connector For Flexible Conduit

LNE-SM-F 软管防水接头




技术参数

产品材质	A, B, D部采用尼龙制成, C部采用丁腈橡胶制成。
工作温度	-40℃至+100℃, 短时可达120℃。
螺纹规格	德制 (PG)、英制 (G)
产品颜色	黑色、灰色 (特殊颜色可以定做)。
防护等级	IP65
产品特性	夹紧圈与密封件特殊的设计, 配合迫紧头装配省时便利, 夹紧软管范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。

Technical Parameters

Product material	A, B, D is made of nylon, C nitrile rubber.
Working temperature	-40℃ ~ +100℃, instantaneously can be +120℃.
Specification of thread	PG, G
Color	Black, grey, Other colors are customizable
Protection grade	IP65
Property	with design of clamping ring and the rubber seal, tighten by sealing nut, can assembly fast & easy with large clamp range, tensile resistance, and waterproof, dustproof, resistant salt, acid and alkali, alcohol, oil, grease and general solvent.

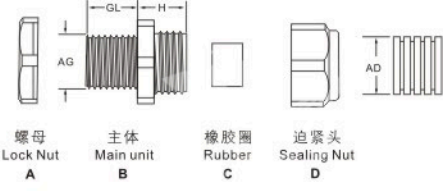


订货号*黑色 Order No. Black No.	订货号*灰色 Order No. Grey No.	适配软管 Suitable Flexible Conduit AD	螺纹标准(德制) Thread standard(PG) PG	外径 (mm) Outer Diameter AG	内径 (mm) Inner Diameter AG	mm GL	mm H	包装单位(只/包) Packaging Unit PCS
LNE-SM-F-PG7-10.0B	LNE-SM-F-PG7-10.0G	AD10.0	PG7	12.5	7.0	10.0	26.0	100
LNE-SM-F-PG9-13.0B	LNE-SM-F-PG9-13.0G	AD13.0	PG9	15.2	10.0	10.0	26.0	100
LNE-SM-F-PG11-15.8B	LNE-SM-F-PG11-15.8G	AD15.8	PG11	18.6	12.0	10.0	26.0	100
LNE-SM-F-PG13.5-18.5B	LNE-SM-F-PG13.5-18.5G	AD18.5	PG13.5	20.4	14.5	10.0	27.0	50
LNE-SM-F-PG16-21.2B	LNE-SM-F-PG16-21.2G	AD21.2	PG16	22.5	15.0	10.0	27.0	50
LNE-SM-F-PG21-28.5B	LNE-SM-F-PG21-28.5G	AD28.5	PG21	28.3	23.0	14.0	34.0	50
LNE-SM-F-PG29-34.5B	LNE-SM-F-PG29-34.5G	AD34.5	PG29	37.0	29.0	14.0	34.0	20
LNE-SM-F-PG36-42.5B	LNE-SM-F-PG36-42.5G	AD42.5	PG36	47.0	36.0	14.0	44.0	10
LNE-SM-F-PG48-54.5B	LNE-SM-F-PG48-54.5G	AD54.5	PG48	59.3	48.0	15.0	50.0	10

订货号*黑色 Order No. Black No.	订货号*灰色 Order No. Grey No.	适配软管 Suitable Flexible Conduit AD	螺纹标准(英制) Thread standard(G) G	外径 (mm) Outer Diameter AG	内径 (mm) Inner Diameter AG	mm GL	mm H	包装单位(只/包) Packaging Unit PCS
LNE-SM-F-G1/2-21.2B	LNE-SM-F-G1/2-21.2G	AD21.2	G 1/2"	21.3	15.0	10.0	27.0	50
LNE-SM-F-G1/2-25B	LNE-SM-F-G1/2-25G	AD25.0	G 1/2"	21.3	15.0	15.0	35.0	50
LNE-SM-F-G3/4-28.5B	LNE-SM-F-G3/4-28.5G	AD28.5	G 3/4"	26.6	20.0	14.0	34.0	50
LNE-SM-F-G1-34.5B	LNE-SM-F-G1-34.5G	AD34.5	G 1"	33.4	26.0	14.0	34.0	20

LNE-SM-W 软管直角接头

Right Angle Elbow Connector For Flexible Conduit



技术参数

产品材质	PA尼龙
工作温度	-40℃至 +100℃
螺纹规格	公制 (M)
产品颜色	黑色、灰色 (特殊颜色可以定做)。
产品特性	内锁扣和本体特殊设计, 装卸只需拨插无需工具。

RoHS

Technical Parameters

Product material	PA (polyamide)
Working temperature	-40℃ ~ +100℃
Specification of thread	Metric
Color	Black,grey,Other colors are customizable
Property	Special design of inner locking buckle make the mounting and dismounting done only by plugging or pulling,without using tools.

订货号*黑色 Order No. Black No.	订货号*灰色 Order No.Grey No.	适配软管 Suitable Flexible Conduit AD	螺纹标准(公制) Thread standard(M)	外径 (mm) Outer Diameter AG	mm I	mm C	mm E	mm F	包装单位(只/包) Packaging Unit PCS
LNE-SM-W-M12B	LNE-SM-W-M12G	AD10.0	M12×1.5	12.0	7.0	10.0	22.0	18.0	100
LNE-SM-W-M16B	LNE-SM-W-M16G	AD10.0	M16×1.5	16.0	10.0	10.0	22.0	20.0	100
LNE-SM-W-M12B	LNE-SM-W-M12G	AD13.0	M12×1.5	12.0	7.0	10.0	22.0	18.0	100
LNE-SM-W-M16B	LNE-SM-W-M16G	AD13.0	M16×1.5	16.0	10.0	10.0	24.5	20.0	100
LNE-SM-W-M18B	LNE-SM-W-M18G	AD13.0	M18×1.5	18.0	10.0	10.0	25.0	24.0	100
LNE-SM-W-M20B	LNE-SM-W-M20G	AD13.0	M20×1.5	20.0	11.0	10.0	25.0	24.0	100
LNE-SM-W-M16B	LNE-SM-W-M16G	AD15.8	M16×1.5	16.0	11.0	10.0	27.5	24.0	100
LNE-SM-W-M18B	LNE-SM-W-M18G	AD15.8	M18×1.5	18.0	11.0	10.0	27.5	24.0	100
LNE-SM-W-M20B	LNE-SM-W-M20G	AD15.8	M20×1.5	20.0	12.0	10.0	27.5	24.0	100
LNE-SM-W-M20B	LNE-SM-W-M20G	AD18.5	M20×1.5	20.0	15.0	11.5	32.0	27.0	50
LNE-SM-W-M20B	LNE-SM-W-M20G	AD21.2	M20×1.5	20.0	15.0	13.0	36.0	31.0	50
LNE-SM-W-M24B	LNE-SM-W-M24G	AD21.2	M24×1.5	24.0	17.0	13.0	36.0	31.0	50
LNE-SM-W-M25B	LNE-SM-W-M25G	AD21.2	M25×1.5	25.0	17.0	13.0	36.0	31.0	50
LNE-SM-W-M25B	LNE-SM-W-M25G	AD25.0	M25×1.5	25.0	19.5	13.0	39.0	32.0	50
LNE-SM-W-M25B	LNE-SM-W-M25G	AD28.5	M25×1.5	25.0	19.5	13.0	44.0	34.0	50
LNE-SM-W-M27B	LNE-SM-W-M27G	AD28.5	M27×2.0	27.0	23.0	13.0	44.0	34.0	50
LNE-SM-W-M30B	LNE-SM-W-M30G	AD28.5	M30×2.0	30.0	23.0	13.0	44.0	34.0	50
LNE-SM-W-M32B	LNE-SM-W-M32G	AD34.5	M32×1.5	32.0	27.0	14.5	50.5	43.0	20
LNE-SM-W-M36B	LNE-SM-W-M36G	AD34.5	M36×2.0	36.0	29.0	14.5	49.5	43.0	20
LNE-SM-W-M40B	LNE-SM-W-M40G	AD34.5	M40×1.5	40.0	29.0	14.5	49.5	43.0	20
LNE-SM-W-M40B	LNE-SM-W-M40G	AD42.5	M40×1.5	40.0	34.0	14.5	57.5	50.0	10
LNE-SM-W-M48B	LNE-SM-W-M48G	AD42.5	M48×2.0	48.0	36.0	14.5	57.5	50.0	10
LNE-SM-W-M50B	LNE-SM-W-M50G	AD54.5	M50×1.5	50.0	44.0	16.0	68.0	64.0	10
LNE-SM-W-M60B	LNE-SM-W-M60G	AD54.5	M60×2.0	60.0	48.0	16.0	68.0	64.0	10
LNE-SM-W-M63B	LNE-SM-W-M63G	AD54.5	M63×1.5	63.0	48.0	16.0	68.0	64.0	10

技术参数

产品材质	PA尼龙
工作温度	-40℃至 +100℃
螺纹规格	德制 (PG) · 英制螺纹 (G)
产品颜色	黑色、灰色 (特殊颜色可以定做)。
产品特性	内锁扣和本体特殊设计, 装卸只需拨插无需工具。


RoHS

Technical Parameters

Product material	PA (polyamide)
Working temperature	-40℃ ~ +100℃
Specification of thread	PG,G
Color	Black,grey,Other colors are customizable
Property	Special design of inner locking buckle make the mounting and dismounting done only by plugging or pulling,without using tools.

Right Angle Elbow Connector For Flexible Conduit

LNE-SM-W 软管直角接头




订货号*黑色 Order No. Black No.	订货号*灰色 Order No.Grey No.	适配软管 Suitable Flexible Conduit AD	螺纹标准(德制) Thread standard(PG)	外径 (mm) Outer Diameter AG	mm I	mm C	mm E	mm F	包装单位(只/包) Packaging Unit PCS
LNE-SM-W-PG7-10B	LNE-SM-W-PG7-10G	AD10.0	PG7	12.5	7.0	10.0	22.0	16.0	100
LNE-SM-W-PG9-13B	LNE-SM-W-PG9-13G	AD13.0	PG9	15.2	10.0	10.0	24.0	20.0	100
LNE-SM-W-PG11-15.8B	LNE-SM-W-PG11-15.8G	AD15.8	PG11	18.6	12.0	10.0	27.5	24.3	100
LNE-SM-W-PG13.5-15.8B	LNE-SM-W-PG13.5-15.8G	AD15.8	PG13.5	20.4	14.0	10.0	27.5	24.0	100
LNE-SM-W-PG13.5-18.5B	LNE-SM-W-PG13.5-18.5G	AD18.5	PG13.5	20.4	14.0	11.0	32.5	27.0	50
LNE-SM-W-PG16-21.2B	LNE-SM-W-PG16-21.2G	AD21.2	PG16	22.5	15.0	13.0	35.0	31.0	50
LNE-SM-W-PG21-28.5B	LNE-SM-W-PG21-28.5G	AD28.5	PG21	28.3	22.0	13.0	44.0	34.0	50
LNE-SM-W-PG29-34.5B	LNE-SM-W-PG29-34.5G	AD34.5	PG29	37.0	29.0	14.0	50.0	43.0	20
LNE-SM-W-PG36-42.5B	LNE-SM-W-PG36-42.5G	AD42.5	PG36	47.0	38.0	14.0	58.0	50.0	10
LNE-SM-W-PG48-54.5B	LNE-SM-W-PG48-54.5G	AD54.5	PG48	59.3	50.0	15.5	68.5	64.0	10

订货号*黑色 Order No. Black No.	订货号*灰色 Order No.Grey No.	适配软管 Suitable Flexible Conduit AD	螺纹标准(英制) Thread standard(G)	外径 (mm) Outer Diameter AG	mm I	mm C	mm E	mm F	包装单位(只/包) Packaging Unit Units/Pack PCS
LNE-SM-W-G3/8-13B	LNE-SM-W-G3/8-13G	AD13.0	G3/8"	16.6	10.0	12.0	20.0	20.0	100
LNE-SM-W-G1/2-21.2B	LNE-SM-W-G1/2-21.2G	AD21.2	G1/2"	21.3	11.0	13.0	36.0	31.0	50
LNE-SM-W-G1/2-25B	LNE-SM-W-G1/2-25G	AD25.0	G1/2"	21.3	11.0	13.0	39.0	32.0	50
LNE-SM-W-G3/4-28.5B	LNE-SM-W-G3/4-28.5G	AD28.5	G3/4"	26.6	21.0	13.5	43.5	34.0	50
LNE-SM-W-G1-34.5B	LNE-SM-W-G1-34.5G	AD34.5	G1"	33.4	28.0	15.0	50.0	43.0	20

LNE-SML 大口径法兰接头

Flanged Fitting

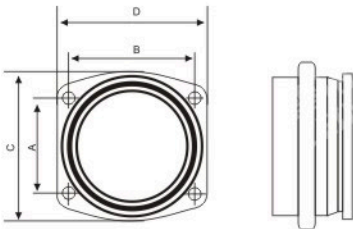

技术参数

产品材质	PA尼龙
工作温度	-40℃~+105℃, 短时可达+125℃
产品颜色	黑色
产品特性	安装便捷

RoHS

Technical Parameters

Product material	PA (polyamide)
Working temperature	-40℃~+105℃, instantaneously can be+125℃.
Color	Black
Property	Easy & fast assembly

订货号 Order No.	适配软管 Suitable Flexible Conduit	安装尺寸 Installation Dimension		外形尺寸 Overall Dimensions		螺纹 Thread	包装单位(只/包) Packaging Unit Units/Pack
		A	B	C	D		
LNE-SML-AD74	AD74	60.9	69.5	84.3	99.6	6.5	10
LNE-SML-AD88	AD88	65.8	83.8	99.2	114.5	6.5	10
LNE-SML-AD108	AD108	74.0	117.0	150.0	125.0	8.0	10

Bracket For Flexible Conduit

LNE-VH 软管固定支架



RoHS

技术参数

产品材质	PA尼龙
工作温度	-40℃至 + 100℃
产品颜色	黑色、灰色（特殊颜色可以定做）。
供应范围	带盖与不带盖两种
产品特性	LNE-VH型固定支架是软管的配套产品，用于固定软管或线缆等。

Technical Parameters


Product material	PA (polyamide)
Working temperature	-40℃ ~ + 100℃
Color	Black, grey, Other colors are customizable
Variety available	two types available for selection: with lid and without lid.
Property	LNE-VH type bracket provide firm support for conduit, used for securing the flexible conduits or cables, etc.

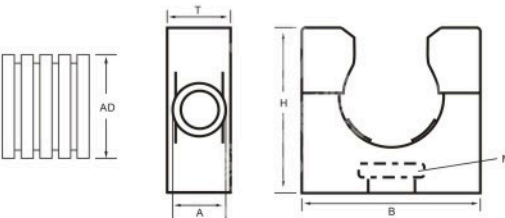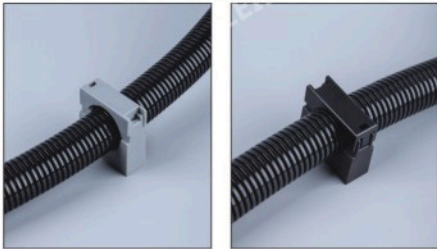

订货号*黑色 Order No. Black No.	订货号*灰色 Order No. Grey No.	适配软管 Suitable Flexible Conduit AD	mm B	mm H	mm T	mm M	mm A	包装单位(只/包) Packaging Unit PCS
LNE-VH-10.0B	LNE-VH-10.0G	AD10.0	25.0	26.0	12.5	4.0	6.5	100
LNE-VH-13.0B	LNE-VH-13.0G	AD13.0	30.0	26.0	12.5	4.0	6.5	100
LNE-VH-15.8B	LNE-VH-15.8G	AD15.8	30.0	26.0	12.5	5.0	6.5	100
LNE-VH-18.5B	LNE-VH-18.5G	AD18.5	35.0	33.0	15.0	6.0	6.5	100
LNE-VH-21.2B	LNE-VH-21.2G	AD21.2	35.0	34.0	15.0	6.0	6.5	100
LNE-VH-25.0B	LNE-VH-25.0G	AD25.0	42.0	38.0	16.0	6.0	11.5	100
LNE-VH-28.5B	LNE-VH-28.5G	AD28.5	42.0	42.0	16.0	6.0	11.5	50
LNE-VH-34.5B	LNE-VH-34.5G	AD34.5	51.0	49.0	16.0	6.0	11.5	50
LNE-VH-42.5B	LNE-VH-42.5G	AD42.5	58.0	57.0	18.0	6.0	11.5	50
LNE-VH-54.5B	LNE-VH-54.5G	AD54.5	73.0	70.0	20.0	7.0	12.0	25(不带盖50只)

LNE-DSM-G 可开式软管接头

Side-open connector for flexible conduit

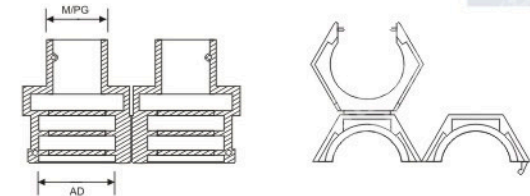

技术参数

产品材质	尼龙
工作温度	-20℃~100℃
产品颜色	黑色
产品特性	所有结构件都可以打开，卡扣设计安装便捷布线方便
使用方法	LNE-DSM-G型软管接头是双层软管的配套产品。适合于电缆已安装好的场合，产品特别适用于预安装电缆的保护，或者现有电缆保护软管的更新维护。

RoHS

Technical Parameters

Product material	nylon
Working temperature	-40℃~+100℃
Color	Black
Property	All structural parts can be opened, buckle design makes installation convenient.
Usage	LNE-DSM-G connector is the auxiliary product of double layer conduit. Suitable for the situation where the cable gland has been installed, which is especially suitable for the protection before cables installed, or the renewal and maintenance of existing cable protection conduits.

订货号 Order No. No.	适配软管 Suitable Flexible Conduit AD	螺纹尺寸(公制) Metric Dimension Of Thread M	螺纹长度 (mm) Thread Length L	包装单位(只/包) Packaging Unit PCS
LNE-DSM-G-M16-10B	AD10.0	M16*1.5	13.0	100
LNE-DSM-G-M20-11B	AD11.0	M20*1.5	17.0	100
LNE-DSM-G-M20-14B	AD14.0	M20*1.5	17.0	50
LNE-DSM-G-M25-16B	AD16.0	M25*1.5	17.5	50
LNE-DSM-G-M25-20B	AD20.0	M25*1.5	17.5	50
LNE-DSM-G-M32-23B	AD23.0	M32*1.5	21.0	50
LNE-DSM-G-M40-29B	AD29.0	M40*1.5	23.0	50
LNE-DSM-G-M40-37B	AD37.0	M40*1.5	23.0	25
LNE-DSM-G-M50-45B	AD45.0	M50*1.5	28.5	25
LNE-DSM-G-M72-70B	AD70.0	M72*2.0	36.0	10

订货号 Order No. No.	适配软管 Suitable Flexible Conduit AD	螺纹尺寸(公制) PG Dimension Of Thread PG	螺纹长度 (mm) Thread Length L	包装单位(只/包) Packaging Unit PCS
LNE-DSM-G-P69-10B	AD10.0	P69	13.0	100
LNE-DSM-G-P613.5-11B	AD11.0	P613.5	17.0	100
LNE-DSM-G-P613.5-14B	AD14.0	P613.5	17.0	50
LNE-DSM-G-P621-16B	AD14.0	P613.5	17.5	50
LNE-DSM-G-P621-20B	AD16.0	P621	17.5	50
LNE-DSM-G-P629-23B	AD23.0	P629	21.0	50
LNE-DSM-G-P629-29B	AD29.0	P629	23.0	50
LNE-DSM-G-P629-37B	AD37.0	P629	23.0	25

flexible conduit bulkhead

LNE-DT 软管闷头


RoHS

技术参数

产品材质	硅橡胶
工作温度	-20℃~85℃
产品颜色	黑色、灰色
产品特性	用于软管端口处电缆的密封和保护


Technical Parameters

Product material	silicone rubber
Working temperature	-20℃~+85℃
Color	Black, grey
Property	Used to seal and protect cables at the conduit port



订货号*黑色 Order No. Black No.	订货号*灰色 Order No. Grey No.	适配软管 Suitable Flexible Conduit AD	线径范围 For Cable Cross Section F	长度 Length L	包装单位(只/包) Packaging Unit PCS
LNE-DT-AD10B	LNE-DT-AD10G	AD10.0	1-8	29	100
LNE-DT-AD13B	LNE-DT-AD13G	AD13.0	1-10	32.5	100
LNE-DT-AD15.8B	LNE-DT-AD15.8G	AD15.8	4-12	36.5	100
LNE-DT-AD18.5B	LNE-DT-AD18.5G	AD18.5	4-13	37.5	100
LNE-DT-AD21.2B	LNE-DT-AD21.2G	AD21.2	6-16.5	37.5	100
LNE-DT-AD25B	LNE-DT-AD25G	AD25.0	6-21	37.5	100
LNE-DT-AD28.5B	LNE-DT-AD28.5G	AD28.5	6-23	40.2	100
LNE-DT-AD34.5B	LNE-DT-AD34.5G	AD34.5	6-29	44.2	50
LNE-DT-AD42.5B	LNE-DT-AD42.5G	AD42.5	10-37	46	50
LNE-DT-AD54.5B	LNE-DT-AD54.5G	AD54.5	10-47	52	25

LNE-Y-PA Y型尼龙三通软管接头 3-way Y-shaped PA Nylon Connector For Flexible Conduit

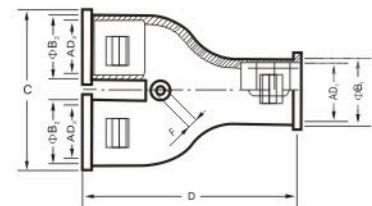

技术参数

产品材质	PA尼龙
工作温度	-40℃至+120℃, 短时可达125℃.
产品颜色	黑色, 灰色

RoHS

Technical Parameters

Product material	PA nylon
Working temperature	-40℃ ~ +120℃, instantaneously can be +125℃.
Color	Black, Grey

订货号(黑/灰) Order No.(B/G)	适配软管 Suitable Flexible Conduit		外尺寸1(mm) Outside Dimensions		总长(mm) Length	总宽(mm) Width	安装孔(mm) Installation Hole	包装单位(只/包) Packaging Unit
No.	AD ₁	AD ₂	ΦB ₁	ΦB ₂	D	C	F	PCS
LNE-Y-PA-AD10.0/2x10.0(B/G)	10.0	2x10.0	17.0	17.0	50	37	1x4.0	50
LNE-Y-PA-AD13.0/2x10.0(B/G)	13.0	2x10.0	17.0	17.0	50	37	1x4.0	50
LNE-Y-PA-AD13.0/2x13.0(B/G)	13.0	2x13.0	17.0	17.0	50	37	1x4.0	50
LNE-Y-PA-AD15.8/2x13.0(B/G)	15.8	2x13.0	17.0	17.0	50	37	1x4.0	50
LNE-Y-PA-AD15.8/2x15.8(B/G)	15.8	2x15.8	23.0	23.0	50	37	1x4.0	50
LNE-Y-PA-AD18.5/2x18.5(B/G)	18.5	2x18.5	26.2	26.2	75	56	1x4.0	25
LNE-Y-PA-AD21.2/2x21.2(B/G)	21.2	2x21.2	29.7	29.7	76.5	63	1x4.0	25
LNE-Y-PA-AD21.2/2x15.8(B/G)	21.2	2x15.8	29.7	23.0	76.5	63	1x4.0	25
LNE-Y-PA-AD28.5/2x15.8(B/G)	28.5	2x15.8	37.4	23.0	76.5	63	1x4.0	25
LNE-Y-PA-AD28.5/2x21.2(B/G)	28.5	2x21.2	37.4	29.7	76.5	63	1x4.0	25

3-way T-shaped PA Nylon Connector For Flexible Conduit LNE-T-PA T型尼龙三通软管接头



RoHS

技术参数

产品材质	PA尼龙
工作温度	-40℃至+120℃, 短时可达150℃.
产品颜色	黑色, 灰色

Technical Parameters

Product material	PA nylon
Working temperature	-40℃ ~ +120℃, instantaneously can be +150℃.
Color	Black, Grey

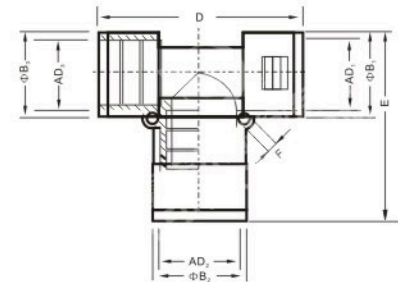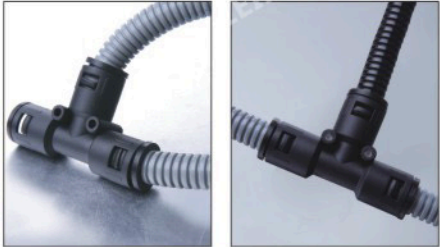


订货号 Order No.	mm	mm	mm	mm	mm	mm	mm	mm	包装单位(只/包) Packaging Unit
No.	AD ₂	AD ₁ /AD ₃	ΦB ₂	B ₁ /ΦB ₃	C	D	E	F	PCS
LNE-T-PA-3x10.0	10	2*10	17	17	13	65	38	2*6.5	50
LNE-T-PA-3x13.0	13	2*13	20	20	16	70	42	2*6.5	50
LNE-T-PA-3x15.8	15.8	2*15.8	24	24	19	75	50	2*6.5	50
LNE-T-PA-3x18.5	18.5	2*18.5	27	27	22	90	56	2*6.5	25
LNE-T-PA-3x21.2	21.2	2*21.2	29.4	29.4	24	93.5	66	2*6.5	25
LNE-T-PA-3x28.5	28.5	2*28.5	37	37	32	107	78	2*6.5	25
LNE-T-PA-3x34.5	34.5	2*34.5	44	44	38	119	90.5	2*6.5	20
LNE-T-PA-3x42.5	42.5	2*42.5	52	52	46	138	94.5	2*6.5	10
LNE-T-PA-3x54.5	54.5	2*54.5	64	64	58	146	105	2*6.5	5
LNE-T-PA-21.1/2x15.8	21.2	2*15.8	29.4	24	24	93.5	66	2*6.5	25
LNE-T-PA-28.5/2x21.2	28.5	2*21.2	37	29.4	32	107.0	78	2*6.5	25
LNE-T-PA-34.5/2x28.5	34.5	2*28.5	44	37	38	119	90.5	2*6.5	20
LNE-T-PA-42.5/2x34.5	42.5	2*34.5	52	44	46	138	94.5	2*6.5	5

LNE-I 直通软管接头

Straight Rubber Connector



技术参数	
产品材质	采用TPE橡胶原料制成。
工作温度	-20°C至+100°C
产品颜色	黑色
Technical Parameters	
Product material	TPE rubber
Working temperature	-20°C ~ +100°C
Color	Black

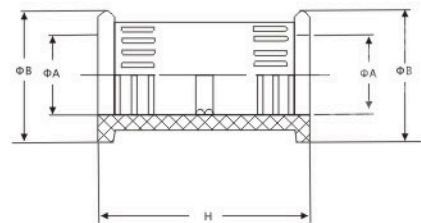


订货号 Order No.	适配软管 Suitable Flexible Conduit	mm ΦA	mm ΦB	mm H	包装单位(只/包) Packaging Unit Units/Pack
LNE-I-2×13.0	13.0×13.0	10.0	20.0	36.5	100
LNE-I-2×15.8	15.8×15.8	14.0	23.0	44.5	100
LNE-I-2×18.5	18.5×18.5	15.0	26.5	48.0	50
LNE-I-2×21.2	21.2×21.2	18.0	29.5	48.0	50
LNE-I-2×28.5	28.5×28.5	25.5	36.5	48.0	50
LNE-I-2×34.5	34.5×34.5	32.5	42.5	48.0	25

3-way Y- shaped Rubber Connector For Flexible Conduit

LNE-Y Y型三通软管接头


技术参数	
产品材质	采用TPE橡胶原料制成。
工作温度	-20°C至+100°C
产品颜色	黑色
Technical Parameters	
Product material	TPE rubber
Working temperature	-20°C ~ +100°C
Color	Black



订货号 Order No.	适配软管 AD ₁	Suitable Flexible Conduit AD ₂	mm Φ 11	mm Φ B ₁	mm Φ B ₂	mm D	mm C	包装单位(只/包) Packaging Unit (PCS)
LNE-Y-3×10.0	10.0	2×10.0	9.5	17.5	17.5	54.5	36.5	50
LNE-Y-2×10.0/13.0	13.0	2×10.0	10.0	20.0	17.0	63.0	36.0	50
LNE-Y-3×13.0	13.0	2×13.0	10.0	20.0	20.0	65.0	43.0	50
LNE-Y-2×13.0/15.8	15.8	2×13.0	12.5	23.0	20.0	66.0	45.0	50
LNE-Y-3×15.8	15.8	2×15.8	12.5	23.0	23.0	68.0	46.0	50
LNE-Y-2×15.8/18.5	18.5	2×15.8	15.0	26.5	23.0	81.0	54.5	25
LNE-Y-3×18.5	18.5	2×18.5	15.0	26.5	26.5	81.0	54.5	25
LNE-Y-2×18.5/21.2	21.2	2×18.5	18.0	29.5	26.5	82.5	62.5	25
LNE-Y-3×21.2	21.2	2×21.2	18.0	29.5	29.5	82.5	62.5	25
LNE-Y-2×21.2/28.5	28.5	2×21.2	25.5	36.5	29.5	68.0	60.5	20
LNE-Y-2×28.5/34.5	34.5	2×28.5	31.5	42.5	36.5	86.0	77.0	10
LNE-Y-2×34.5/42.5	42.5	2×34.5	39.7	52.5	42.5	98.5	89.0	10

LNE-T T型三通软管接头

3-way T-shaped Rubber Connector For Flexible Conduit

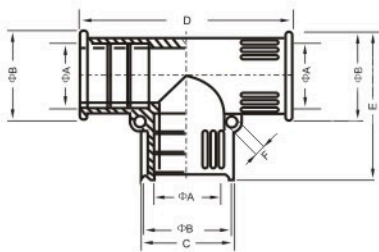

技术参数

产品材质	采用TPE橡胶原料制成。
工作温度	-20℃至+100℃
产品颜色	黑色

Technical Parameters

Product material	TPE rubber
Working temperature	-20℃ ~ +100℃
Color	Black

订货号 Order No.	适配软管 Suitable Flexible Conduit	mm ΦA	mm ΦB	mm D	mm E	mm C	mm F	包装单位(只/包) Packaging Unit (PCS)
LNE-T-3×10.0	3×10.0	7.0	17.5	46.5	32.5	18.3	4.0	100
LNE-T-3×13.0	3×13.0	10.0	21.0	51.0	36.0	21.0	4.0	50
LNE-T-3×15.8	3×15.8	14.0	25.0	63.0	44.0	24.5	4.0	50
LNE-T-15.8/2×13	15.8/2×13	10.0	21.0	63.0	44.0	24.5	4.0	50
LNE-T-3×18.5	3×18.5	15.0	26.5	70.5	48.5	24.3	4.0	50
LNE-T-3×21.2	3×21.2	18.0	29.5	71.5	50.0	29.5	4.0	50
LNE-T-2×21.2/28.5	2×21.2/28.5	18.0	32.0	78.0	51.0	38.5	4.0	25
LNE-T-3×25.0	3×25.0	25.0	35.0	65.0	65.0	65.0	4.0	25
LNE-T-3×28.5	3×28.5	25.5	36.5	77.0	57.5	37.0	4.0	25
LNE-T-3×34.5	3×34.5	31.5	42.5	85.0	64.0	42.0	4.0	10
LNE-T-3×42.5	3×42.5	39.7	52.5	96.0	74.5	52.8	4.0	10
LNE-T-3×54.5	3×54.5	52.0	60.0	100.0	74.0	60.0	4.0	5

Nylon Cable Gland With Nylon Straight Connector For Plastic Conduit

LNE-GK 塑料电缆软管接头




技术参数

产品材质	PA6
螺纹规格	公制(M)
工作温度	-40℃~+105℃, 短时可达+125℃
产品颜色	黑色, 灰色

Technical Parameters

Product material	PA6
Specification of thread	Metric
Working temperature	-40℃~+105℃, instantaneously can be+125℃.
Color	Black,Grey

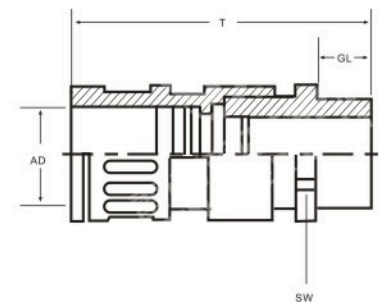

订货号(黑/灰) Order No.(B/G) No.	适配软管 Suitable Flexible Conduit AD	螺纹标准(公制) Thread standard(M) M	卡口范围 Range Of Bayonet AG	螺纹长度 (mm) Thread Length GL	扳手尺寸 Wrench SW	总长 Total Length T	包装单位(只/包) Packaging Unit PCS
LNE-GK-AD10/M12(B/G)	AD10.0	M12x1.5	3-6.5	8	15	52.0	50
LNE-GK-AD13/M16(B/G)	AD13.0	M16x1.5	4-8	8	19	56.0	50
LNE-GK-AD15.8/M16(B/G)	AD15.8	M16x1.5	5-10	8	22	58.5	50
LNE-GK-AD15.8/M18(B/G)	AD15.8	M18x1.5	5-10	8	22	58.5	50
LNE-GK-AD18.5/M20(B/G)	AD18.5	M20x1.5	6-12	9	24	61.0	50
LNE-GK-AD21.2/M20(B/G)	AD21.2	M20x1.5	10-14	10	27	69.0	50
LNE-GK-AD21.2/M22(B/G)	AD21.2	M22x1.5	10-14	10	27	69.0	50
LNE-GK-AD21.2/M24(B/G)	AD21.2	M24x1.5	10-14	10	27	69.0	50
LNE-GK-AD28.5/M25(B/G)	AD28.5	M25x1.5	13-18	11	33	74.0	50
LNE-GK-AD28.5/M27(B/G)	AD28.5	M27x2.0	13-18	11	33	74.0	50
LNE-GK-AD28.5/M30(B/G)	AD28.5	M30x2.0	13-18	11	33	74.0	20
LNE-GK-AD34.5/M32(B/G)	AD34.5	M32x1.5	18-25	11	42	85.0	20
LNE-GK-AD34.5/M36(B/G)	AD34.5	M36x2.0	18-25	11	42	85.0	20
LNE-GK-AD42.5/M40(B/G)	AD42.5	M40x1.5	22-32	13	52	98.0	20
LNE-GK-AD42.5/M45(B/G)	AD42.5	M45x2.0	22-32	13	52	98.0	20
LNE-GK-AD42.5/M48(B/G)	AD42.5	M48x2.0	22-32	13	52	98.0	20
LNE-GK-AD54.5/M50(B/G)	AD54.5	M50x1.5	32-38	15	60	103.0	10
LNE-GK-AD54.5/M56(B/G)	AD54.5	M56x2.0	32-38	15	60	103.0	10
LNE-GK-AD54.5/M63(B/G)	AD54.5	M63x1.5	37-44	15	65	103.0	10

LNE-GK 塑料电缆软管接头

Nylon Cable Gland With Nylon Straight Connector For Plastic Conduit




技术参数

产品材质	PA6
螺纹规格	德制
工作温度	-40℃~+105℃, 短时可达+150℃
产品颜色	黑色, 灰色
防护等级	IP67, 使用合适的密封圈。

RoHS

Technical Parameters

Product material	PA6
Specification of thread	PG
Working temperature	-40℃~+105℃, instantaneously can be+150℃.
Color	Black,Grey
Protection degree	IP67,using suitable seals.

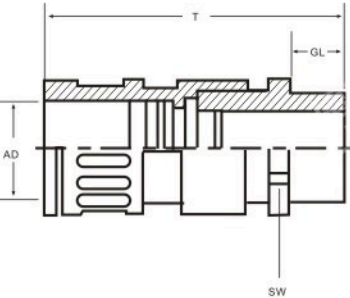

订货号(黑/灰) Order No.(B/G) No.	适配软管 Suitable Flexible Conduit AD	螺纹标准(德制) Thread standard(PG) PG	卡口范围 Range Of Bayonet AG	螺纹长度 (mm) Thread Length GL	扳手尺寸 Wrench SW	总长 Total Length T	包装单位(只/包) Packaging Unit PCS
LNE-GK-AD10/P7(B/G)	AD10.0	P67	3-6.5	8	15	52.0	100
LNE-GK-AD13/P9(B/G)	AD13.0	P69	4-8	8	19	56.0	100
LNE-GK-AD15.8/P11(B/G)	AD15.8	P611	5-10	8	22	58.5	100
LNE-GK-AD18.5/P13.5(B/G)	AD18.5	P613.5	6-12	9	24	61.0	100
LNE-GK-AD21.2/P16(B/G)	AD21.2	P616	10-14	10	27	69.0	100
LNE-GK-AD28.5/P21(B/G)	AD28.5	P621	13-18	11	33	74.0	50
LNE-GK-AD34.5/P29(B/G)	AD34.5	P629	18-25	11	42	85.0	50
LNE-GK-AD42.5/P36(B/G)	AD42.5	P636	22-32	13	52	98.0	20
LNE-GK-AD54.5/P42(B/G)	AD54.5	P642	32-38	15	60	103.0	20
LNE-GK-AD54.5/P48(B/G)	AD54.5	P648	37-44	15	65	103.0	20

Metal Thread Straight Nylon Connector

LNE-SMGM 金属螺纹接头


RoHS

技术参数

产品材质	主体塑料部分为PA6, 金属螺纹部分为黄铜镀镍。
螺纹规格	公制(M)
工作温度	-40℃~+105℃, 短时可达+150℃
产品颜色	黑色, 灰色

Technical Parameters

Product material	The plastic part is nylon6,the metal part is Nickel-plated brass.
Specification of thread	Metric
Working temperature	-40℃~+105℃,instantaneously can be +150℃.
Color	Black,Grey



订货号(黑/灰) Order No.(B/G) No.	适配软管 Suitable Flexible Conduit AD	螺纹标准(公制) Thread standard(M) M	外径 Outer Diamete B	螺纹长度 (mm) Thread Length GL	扳手尺寸 Wrench SW	总长 Total Length T	包装单位(只/包) Packaging Unit PCS
LNE-SMGM-AD10/M12(B/G)	AD10.0	M12x1.5	10	15	17	34.5	100
LNE-SMGM-AD13/M16(B/G)	AD13.0	M16x1.5	10	18	20.2	36	100
LNE-SMGM-AD15.8/M16(B/G)	AD15.8	M16x1.5	12	21	23.2	38	50
LNE-SMGM-AD15.8/M20(B/G)	AD15.8	M20x1.5	12	21	23.2	38	50
LNE-SMGM-AD18.5/M20(B/G)	AD18.5	M20x1.5	12	24	26.2	40	50
LNE-SMGM-AD21.2/M20(B/G)	AD21.2	M20x1.5	13	27	29.7	45	25
LNE-SMGM-AD28.5/M25(B/G)	AD28.5	M25x1.5	13	34	37.4	48	20
LNE-SMGM-AD28.5/M32(B/G)	AD28.5	M32x1.5	13	34	37.4	48	20
LNE-SMGM-AD34.5/M32(B/G)	AD34.5	M32x1.5	13	40	44	52	10
LNE-SMGM-AD34.5/M32(B/G)	AD34.5	M32x1.5	13	40	44	52	10
LNE-SMGM-AD34.5/M40(B/G)	AD34.5	M40x1.5	13	40	44	52	10
LNE-SMGM-AD42.5/M40(B/G)	AD42.5	M40x1.5	14	48	51.8	54	10
LNE-SMGM-AD42.5/M50(B/G)	AD42.5	M50x1.5	14	48	51.8	54	5
LNE-SMGM-AD54.5/M50(B/G)	AD54.5	M50x1.5	14	59	64	55	5
LNE-SMGM-AD54.5/M63(B/G)	AD54.5	M63x1.5	14	59	64	55	5

LNE-WM 90°金属螺纹接头

90° Metal Thread Nylon Connector




技术参数

产品材质	主体塑料部分为PA6, 金属螺纹部分为黄铜镀镍。
螺纹规格	公制 (M)、德制 (PG)
工作温度	-40°C~105°C, 短时间可以达到125°C。
产品颜色	黑色, 灰色



Technical Parameters

Product material	The plastic part is nylon6 ,the metal part is Nickel-plated brass.
Specification of thread	Metric, PG
Working temperature	-40°C~+105°C,instantaneously can be +125°C.
Color	Black, Grey



订货号(黑/灰) Order No.(B/G) No.	适配软管 Suitable Flexible Conduit AD	螺纹标准(公制) Thread standard(M) M	孔径 Aperture A	外径 Outer Diamete B	螺纹长度(mm) Thread Length GL	长度(mm) Length D	包装单位(只/包) Packaging Unit PCS
LNE-WM90-AD15.8/M16(B/G)	AD15.8	M16x1.5	12	23.2	12	38	50
LNE-WM90-AD15.8/M20(B/G)	AD15.8	M20x1.5	12	23.2	12	38	50
LNE-WM90-AD21.2/M20(B/G)	AD21.2	M20x1.5	17	29.7	13	45	25
LNE-WM90-AD34.5/M32(B/G)	AD34.5	M32x1.5	26	44	13	52	25
LNE-WM90-AD34.5/M40(B/G)	AD34.5	M40x1.5	28.5	44	13	52	25

订货号(黑/灰) Order No.(B/G) No.	适配软管 Suitable Flexible Conduit AD	螺纹标准(德制) Thread standard(PG) PG	孔径 Aperture A	外径 Outer Diamete B	螺纹长度(mm) Thread Length GL	长度(mm) Length D	包装单位(只/包) Packaging Unit PCS
LNE-WM90-AD15.8/PG11(B/G)	AD15.8	PG11	12	23.2	12	38	50
LNE-WM90-AD21.2/PG13(B/G)	AD15.8	PG13	12	29.7	12	38	50
LNE-WM90-AD21.2/PG16(B/G)	AD21.2	PG16	17	29.7	13	45	25
LNE-WM90-AD34.5/PG29(B/G)	AD34.5	PG29	26	44.0	13	52	25

Double Headed Rapid Corrugated Conduit Connector

LNE-I-PA 双头快速波纹管接头




技术参数

产品材质	采用UL认可的尼龙PA66制成(防火等级UL94V-2)
工作温度	-40°C~100°C, 短时至125°C
产品颜色	黑色, 灰色, 其他颜色可订做。
产品特性	夹紧浪管抗压力强, 超快速插拔装卸, 提高安装效率。两者相互配合, 可用于高端机床, 线箱等。

Technical Parameters


Product material	made of UL approved nylon PA66 (fire rating UL94V-2)
Working temperature	-40°C~+105°C,instantaneously can be +125°C.
Color	Black, Grey
Product Feature	The clamping wave tube has strong pressure resistance, ultra fast insertion and removal, and improves installation efficiency.The two complement each other and can be used for high-end machine tools, wire boxes, etc.

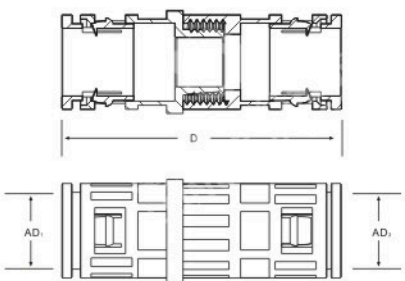

订货号 Order No. No.	适配软管 Suitable Flexible Conduit AD ₁	适配软管 Suitable Flexible Conduit AD ₂	长度(mm) Length D
LNE-I-PA-13-13	AD13	AD13	63
LNE-I-PA-13-15.8	AD13	AD15.8	65
LNE-I-PA-15.8-15.8	AD15.8	AD15.8	68
LNE-I-PA-15.8-18.5	AD15.8	AD18.5	68
LNE-I-PA-15.8-21.2	AD15.8	AD21.2	71
LNE-I-PA-18.5-18.5	AD18.5	AD18.5	70
LNE-I-PA-21.2-21.2	AD21.2	AD21.2	6
LNE-I-PA-21.2-25	AD21.2	AD25	80
LNE-I-PA-21.2-28.5	AD21.2	AD28.5	80
LNE-I-PA-28.5-28.5	AD28.5	AD28.5	84
LNE-I-PA-34.5-34.5	AD34.5	AD34.5	90
LNE-I-PA-42.5-42.5	AD42.5	AD42.5	97

LNE-SDJ 尼龙金属软管防水接头

Nylon metal hose waterproof connector

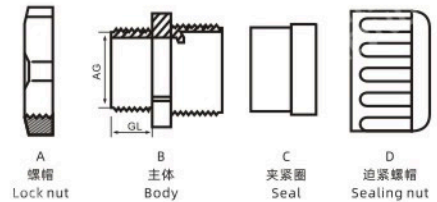

技术参数

产品材质	采用UL认可的环保无卤素尼龙PA66(防火等级UL94V-2)制成。
螺纹规格	公制 (M)
防护等级	IP65
工作温度	-40°C~105°C, 短时间可以达到120°C。
产品颜色	黑色、灰色。其它颜色可定做。
产品特性	可结合3/8"到2"之间的金属软管使用。

RoHS

Technical Parameters

Product material	Made of UL-approved environmentally friendly halogen-free nylon PA66 (fire retardant grade UL94V-2).
Specification of thread	Metric
Protection Level	IP65
Working temperature	-40°C~+105°C,instantaneously can be +120°C.
Color	Black, gray. Other colors can be customized.
Product Features	Can be used in conjunction with metal hoses ranging from 3/8" to 2".

订货号(黑/灰) Order No.(B/G)	配套金属软管(公制) Matching metal Hose(M)	配套金属软管(英寸) Matching metal Hose(in.)	螺纹标准(公制) Thread standard(M)	螺纹长度(mm) Thread Length	螺纹外径 (mm) Thread O.D	扳手尺寸(mm) Wrench 螺母+螺帽 Nut+Nut	包装单位(只/包) Packaging Unit
No.	Φ	Φ	M	GL	AG	SW	PCS
LNE-SDJ-13-M16(B/G)	Φ13	3/8"	M16×1.5	15	16	22/30	50
LNE-SDJ-13-M20(B/G)	Φ13	3/8"	M20×1.5	15	20	27/30	50
LNE-SDJ-13-M25(B/G)	Φ13	3/8"	M25×1.5	10	22	30/30	50
LNE-SDJ-16-M16(B/G)	Φ16	1/2"	M16×1.5	15	16	22/35	50
LNE-SDJ-16-M20(B/G)	Φ16	1/2"	M20×1.5	15	20	27/35	50
LNE-SDJ-16-M25(B/G)	Φ16	1/2"	M25×1.5	15	25	33/35	50
LNE-SDJ-20-M25(B/G)	Φ20	3/4"	M25×1.5	15	25	33/34	50
LNE-SDJ-25-M32(B/G)	Φ25	1"	M32×1.5	15	32	41/43	20
LNE-SDJ-32-M40(B/G)	Φ32	1-1/4"	M40×1.5	15	40	50/57	10
LNE-SDJ-32-M50(B/G)	Φ32	1-1/4"	M50×1.5	15	50	62/57	10
LNE-SDJ-38-M50(B/G)	Φ38	1-1/2"	M50×1.5	15	50	62/65	10
LNE-SDJ-51-M63(B/G)	Φ51	2"	M63×1.5	25	63	75/80	5

Nylon metal hose waterproof connector

LNE-SDJ 尼龙金属软管防水接头

RoHS

技术参数

产品材质	采用UL认可的环保无卤素尼龙PA66(防火等级UL94V-2)制成。
螺纹规格	德制 (PG)、英制 (G)
防护等级	IP65
工作温度	-40°C~105°C, 短时间可以达到120°C。
产品颜色	黑色、灰色。其它颜色可定做。
产品特性	可结合3/8"到2"之间的金属软管使用。

Technical Parameters

Product material	Made of UL-approved environmentally friendly halogen-free nylon PA66 (fire retardant grade UL94V-2).
Specification of thread	PG,G
Protection Level	IP65
Working temperature	-40°C~+105°C,instantaneously can be +120°C.
Color	Black, gray. Other colors can be customized.
Product Features	Can be used in conjunction with metal hoses ranging from 3/8" to 2".



订货号(黑/灰) Order No.(B/G)	配套金属软管(公制) Matching metal Hose(M)	配套金属软管(英寸) Matching metal Hose(in.)	螺纹标准(德制) Thread standard(PG)	螺纹长度(mm) Thread Length	螺纹外径 (mm) Thread O.D	扳手尺寸(mm) Wrench 螺母+螺帽 Nut+Nut	包装单位(只/包) Packaging Unit
No.	Φ	Φ	PG	GL	AG	SW	PCS
LNE-SDJ-13-PG11(B/G)	Φ13	3/8"	PG11	10	18.6	24/30	50
LNE-SDJ-13-PG13.5(B/G)	Φ13	3/8"	PG13.5	10	20.4	27/30	50
LNE-SDJ-13-PG16(B/G)	Φ13	3/8"	PG16	10.8	22.5	30/30	50
LNE-SDJ-16-PG16(B/G)	Φ16	1/2"	PG16	10.8	22.5	30/35	50
LNE-SDJ-16-PG21(B/G)	Φ16	1/2"	PG21	12	28.3	36/35	50
LNE-SDJ-20-PG22(B/G)	Φ20	3/4"	PG21	12	28.3	36/40	50
LNE-SDJ-25-PG29(B/G)	Φ25	1"	PG29	12	37	46/43	20
LNE-SDJ-32-PG36(B/G)	Φ32	1-1/4"	PG36	15	47	57/57	10
LNE-SDJ-32-PG42(B/G)	Φ32	1-1/4"	PG42	15	54	64/57	10
LNE-SDJ-38-PG42(B/G)	Φ38	1-1/2"	PG42	15	54	64/65	10
LNE-SDJ-51-PG48(B/G)	Φ51	2"	PG48	25	59.3	70/80	5

订货号(黑/灰) Order No.(B/G)	配套金属软管(公制) Matching metal Hose(M)	配套金属软管(英寸) Matching metal Hose(in.)	螺纹标准(英制) Thread standard(G)	螺纹长度(mm) Thread Length	螺纹外径 (mm) Thread O.D	扳手尺寸(mm) Wrench 螺母+螺帽 Nut+Nut	包装单位(只/包) Packaging Unit
No.	Φ	Φ	G	GL	AG	SW	PCS
LNE-SDJ-13-G3/8(B/G)	Φ13	3/8"	G1/2"	15	20.955	27/30	50
LNE-SDJ-16-G1/2(B/G)	Φ16	1/2"	G1/2"	15	20.955	27/35	50
LNE-SDJ-16-G3/4(B/G)	Φ16	1/2"	G3/4"	15	26.441	36/35	50
LNE-SDJ-20-G3/4(B/G)	Φ20	3/4"	G3/4"	15	26.441	36/40	50
LNE-SDJ-25-G1(B/G)	Φ25	1"	G1"	15	33.249	46/43	20
LNE-SDJ-32-G1-1/4(B/G)	Φ32	1-1/4"	G1-1/4"	16	41.91	57/57	10
LNE-SDJ-32-G1-1/2(B/G)	Φ32	1-1/4"	G1-1/2"	22	48	60/57	10
LNE-SDJ-38-G1-1/2(B/G)	Φ38	1-1/2"	G1-1/2"	22	48	60/65	10
LNE-SDJ-51-G2(B/G)	Φ51	2"	G2"	25	60	75/80	5

LNE-SM-N 内螺纹软管接头

Female Thread Hose Connector



技术参数

产品材质	采用尼龙PA66制成。
工作温度	-40°C-100°C,短时至120°C。
产品颜色	黑色、灰色。其它颜色可定做。
产品特性	夹紧浪管抗压力强,超快速插拔装卸,提高安装效率。


特殊规格可定制。

Technical Parameters

Product material	Made of nylon Pa66.
Working temperature	-40°C~+100°C,instantaneously can be +120°C.
Color	Black, gray. Other colors can be customized.
Product Features	Strong clamping force against pressure, ultra-fast plug-and-unplug loading and unloading, improving installation efficiency.

Special specifications can be customized.

RoHS

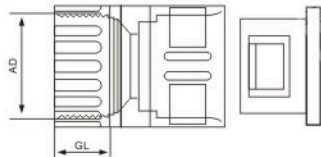

订货号(黑/灰) Order No.(B/G) No.	适配软管 Suitable Flexible Conduit AD	螺纹标准(公制) Thread standard(M) M	包装单位(只/包) Packaging Unit PCS
LNE-SM-N-M16-13(B/G)	Ad13	M16x1.5	100
LNE-SM-N-M20-15.8(B/G)	Ad15.8	M20x1.5	100
LNE-SM-N-M22-18.5(B/G)	Ad18.5	M22x1.5	50
LNE-SM-N-M25-21.2(B/G)	Ad21.2	M25x1.5	50
LNE-SM-N-M30-25(B/G)	Ad25	M30x1.5	50
LNE-SM-N-M30-28.5(B/G)	Ad28.5	M30x2.0	50
LNE-SM-N-M37-34.5(B/G)	Ad34.5	M37x2.0	20
LNE-SM-N-M47-42.5(B/G)	Ad42.5	M47x2.0	10

90°Metal Thread Nylon Connector

LNE-SW-F 直角软管防水接头


RoHS

技术参数

产品材质	A,C,E部分采用环保无卤素尼龙PA66制成, B,D 部分采用三元乙丙耐候橡胶制成。(可定制耐寒,耐高温,耐强酸碱与抗腐蚀橡胶)
螺牙规格	公制 (M)、英制 (G)
工作温度	-40°C-100°C
产品颜色	黑色、灰色。其它颜色可定做。
产品特性	本款抗水压,即使拉扯波纹管也能保持气密性的产品。产品广泛应用于移动式的自动化设备的防水,防油与气密性的场合。

Technical Parameters

Product material	Parts A, C, and F are made of environmentally friendly halogen-free nylon PA66, while parts B and D are made of EPDM weather-resistant rubber. (Customizable for cold resistance, high-temperature resistance, strong acid and alkali resistance, and anti-corrosion rubber)
Specification of thread	Metric,G
Working temperature	-40°C~+100°C
Color	Black, gray. Other colors can be customized.
Product Features	This model is resistant to water pressure and maintains its air tightness even when the corrugated tube is pulled. The product is widely used in mobile automated equipment for waterproofing, oil resistance, and air tightness applications.

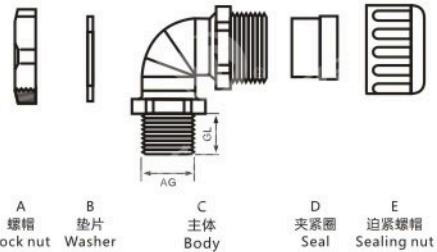

订货号(黑/灰) Order No.(B/G) No.	适配软管 Suitable Flexible Conduit AD	螺纹标准(公制) Thread standard(M) M	螺纹长度(mm) Thread Length GL
LNE-SW-F-M16-13(B/G)	Ad13	M16x1.5	10
LNE-SW-F-M20-15.8(B/G)	Ad15.8	M20x1.5	15
LNE-SW-F-M20-18.5(B/G)	Ad18.5	M20x1.5	15
LNE-SW-F-M20-21.2(B/G)	Ad21.2	M20x1.5	15
LNE-SW-F-M25-21.2(B/G)	Ad21.2	M25x1.5	15
LNE-SW-F-M25-21.2(B/G)	Ad25	M25x1.5	15
LNE-SW-F-M25-28.5(B/G)	Ad28.5	M25x1.5	15
LNE-SW-F-M32-34.5(B/G)	Ad34.5	M32x1.5	15
LNE-SW-F-M40-42.5(B/G)	Ad42.5	M40x1.5	15
LNE-SW-F-M50-42.5(B/G)	Ad42.5	M50x1.5	15

订货号(黑/灰) Order No.(B/G) No.	适配软管 Suitable Flexible Conduit AD	螺纹标准(英制) Thread standard(G) G	螺纹长度(mm) Thread Length GL
LNE-SW-F-G1/2-15.8(B/G)	Ad15.8	G1/2"	15
LNE-SW-F-G1/2-18.5(B/G)	Ad18.5	G1/2"	15
LNE-SW-F-G1/2-21.2(B/G)	Ad21.2	G1/2"	15