

金属软管&金属软管接头系列
Metallic Conduit and Metal Tubings Connectors Series

应用领域 Application Area

用于航天航空设备、电力发电、船舶、化学工业、工业自动化设备、机床机械设备、机器人、铁路轨道交通、通信系统、工程设备安装、照明设备、电气绝缘保护系统等室内外环境的电线电缆保护。

Used for indoor and outdoor environments wire and cable protection such as aerospace equipment,electric power generation, ships, chemical industry, industrial automation equipment, machine tool mechanical equipment, robots, railway rail transit, communication systems, engineering equipment installation, lighting equipment, electrical insulation protection systems, etc.



电话(Tel):0573-83255228
邮箱(E-mail): Lei@leinuor.com

雷诺尔配线系统
LEINUOR.COM

金属软管与接头产品一览表

METAL HOSE AND FITTINGS PRODUCT OVERVIEW



金属软管系列 Metallic Conduit Series

- 01 LNE-JS 镀锌金属软管
Galvanized Steel Flexible Conduit
- 02 LNE-JS-P4 双扣镀锌金属软管
P4 Interlocked Galvanized Steel Flexible Conduit
- 03 LNE-JSH 201不锈钢金属软管
201 Stainless Steel Flexible Conduit
- 04 LNE-JSH 304不锈钢金属软管
304 Stainless Steel Flexible Conduit
- 05 LNE-JSH 316不锈钢金属软管
316 Stainless Steel Flexible Conduit
- 06 LNE-JSH-P4 304不锈钢双扣金属软管
P4 Interlocked 304 Stainless Steel Flexible Conduit
- 07 LNE-UL 美标金属软管
UL Standard Metal Flexible Conduit
- 08 LNE-JSGH 不锈钢编织金属软管
Explosion-proof Stainless Steel Braided Conduit
- 09 LNE-JSB 包塑金属软管
Corrugated PVC Coated Flexible Conduit
- 10 LNE-JSB-P4 双扣包塑金属软管
P4 Interlocked Corrugated PVC Coated Flexible Conduit
- 11 LNE-JSBH 201不锈钢包塑金属软管
201 Stainless Steel Corrugated PVC Coated Flexible Conduit
- 12 LNE-JSBH 304不锈钢包塑金属软管
304 Stainless Steel Corrugated PVC Coated Flexible Conduit
- 13 LNE-JSBH 316不锈钢包塑金属软管
316 Stainless Steel Corrugated PVC Coated Flexible Conduit
- 14 LNE-JSBH-P4 304不锈钢双扣包塑金属软管
304 Stainless Steel P4 Interlocked Corrugated PVC Coated Flexible Conduit
- 15 LNE-JSP 平包塑金属软管
Liquid-tight Smooth PVC Coated Metal Conduit
- 16 LNE-JSPH-P4 304不锈钢双扣平包塑金属软管
304 Stainless Steel P4 Interlocked Liquid-tight Smooth PVC Coated Metal Conduit



- 17 LNE-TPU TPU包塑金属软管
Corrugated TPU Coated Flexible Conduit
- 18 LNE-TPU-P4 双扣TPU包塑金属软管
P4 Interlocked Corrugated TPU Coated Flexible Conduit
- 19 LNE-TPUH 201不锈钢TPU包塑金属软管
201 Stainless Steel Corrugated TPU Coated Flexible Conduit
- 20 LNE-TPUH 304不锈钢TPU包塑金属软管
304 Stainless Steel Corrugated TPU Coated Flexible Conduit
- 21 LNE-TPUH 316不锈钢TPU包塑金属软管
316 Stainless Steel Corrugated TPU Coated Flexible Conduit
- 22 LNE-TPUH-P4 304不锈钢双扣TPU包塑金属软管
304 Stainless Steel P4 Interlocked Corrugated TPU Coated Metal Conduit
- 23 LNE-TPUP TPU平包塑金属软管
Liquid-tight Smooth TPU Coated Metal Conduit
- 24 LNE-TPUPH-P4 304不锈钢双扣TPU平包塑金属软管
304 Stainless Steel P4 Interlocked Liquid-tight Smooth TPU Coated Metal Conduit
- 25 LNE-JSB-PE PE包塑金属软管
Corrugated PE Coated Flexible Conduit
- 26 LNE-JSB-PE-P4 双扣PE包塑金属软管
P4 Interlocked Corrugated PE Coated Flexible Conduit
- 27 LNE-JSBH-PE 201不锈钢PE包塑金属软管
201 Stainless Steel Corrugated PE Coated Flexible Conduit
- 28 LNE-JSBH-PE 304不锈钢PE包塑金属软管
304 Stainless Steel Corrugated PE Coated Flexible Conduit
- 29 LNE-JSBH-PE 316不锈钢PE包塑金属软管
316 Stainless Steel Corrugated PE Coated Flexible Conduit
- 30 LNE-JSBH-PE-P4 304不锈钢双扣PE包塑金属软管
304 Stainless Steel P4 Interlocked Corrugated PE Coated Metal Conduit
- 31 LNE-JSP-PE PE平包塑金属软管
Liquid-tight Smooth PE Coated Metal Conduit
- 32 LNE-JSPH-PE-P4 304不锈钢双扣PE平包塑金属软管
304 Stainless Steel P4 Interlocked Liquid-tight Smooth PE Coated Metal Conduit



不锈钢软管接头系列 Stainless Steel Conduit Connector Series

- 33 LNE-DPB 不锈钢端式接头
Stainless Steel Straight Fitting
- 35 LNE-DPN-8 不锈钢内牙式接头
Stainless Steel Female Thread Fitting
- 36 LNE-DKJ-8 不锈钢卡套接头
Stainless Steel Sleeve Type Conduit Fitting
- 37 LNE-DGJ-8 不锈钢自固式接头
Stainless Steel Self Secured Fitting
- 38 LNE-DWB 不锈钢90度接头
Stainless Steel 90-Degree Angle Elbow Fitting
- 39 LNE-DWB 不锈钢45度接头
Stainless Steel 45-Degree Angle Elbow Fitting
- 40 LNE-SBG 不锈钢金属软管电缆接头
Stainless Steel Cable Gland For Metal Conduit


- 42 LNE-SSD 不锈钢塑料软管电缆接头
Stainless Steel Cable Gland For Plastic Flexible Conduit
- 43 LNE-SKG 不锈钢圆形闪盖
Stainless Steel Circle End Cap
- 44 LNE-SHG 不锈钢六角闪盖
Stainless Steel Hexagonal End Cap
- 45 LNE-S-BJ 不锈钢六角扩径接头
Stainless Steel Hexagonal Enlarger
- 46 LNE-S-BJ 不锈钢圆型扩径接头
Stainless Steel Circle Enlarger
- 47 LNE-S-KJ 不锈钢六角缩径接头
Stainless Steel Hexagonal Reducer



黄铜软管接头系列 Brass Conduit Connector Series

- 48 LNE-DWM 黄铜90度接头
Brass 90-Degree Angle Elbow Fitting
- 49 LNE-DPC 黄铜端式接头
Brass Straight Fitting
- 51 LNE-DPN-M 黄铜内牙式接头
Brass Female Thread Straight Fitting
- 52 LNE-DKJ-M 黄铜卡套接头
Brass Sleeve Type Fitting
- 53 LNE-DGJ-M 黄铜自固式接头
Brass Circulip Self Secured Fitting
- 54 LNE-MSD-M 黄铜塑料软管电缆接头
Brass Cable Gland For Plastic Flexible Conduit

- 55 LNE-MBG-M 黄铜金属软管电缆接头
Brass Cable Gland For Metal Flexible Conduit
- 57 LNE-MKG 黄铜圆形闪盖
Brass Circle End Cap
- 58 LNE-HKG 黄铜六角闪盖
Brass Hexagonal End Cap
- 59 LNE-M-BJ 黄铜扩径接头
Brass Enlarger
- 60 LNE-M-KJ 黄铜缩径接头
Brass Reducer



锌合金软管接头系列 Zinc Alloy Conduit Connector Series

- 61 LNE-DPJ 锌合金端式接头
Zinc Alloy Straight Fitting
- 63 LNE-DPN 锌合金内牙式接头
Zinc Alloy Female Thread Straight Fitting
- 64 LNE-DKJ 锌合金卡套式接头
Zinc Alloy Sleeve Type Fitting
- 65 LNE-DGJ 锌合金卡簧自固式接头
Zinc Alloy Circulip Self Secured Fitting
- 66 LNE-DWJ 锌合金90度弯接头
Zinc Alloy 90-Degree Angle Elbow Fitting
- 67 LNE-DWJ 锌合金45度弯接头
Zinc Alloy 45-Degree Angle Elbow Fitting
- 68 LNE-Y-Z 锌合金Y型三通接头
Zinc Alloy Y-shaped Fitting
- 69 LNE-T-Z 锌合金T型三通接头
Zinc Alloy T-shaped Fitting

- 70 LNE-DPJ0 锌合金双锁紧金属软管接头
Zinc Alloy Double Locked Fitting
- 71 LNE-DWJ0 锌合金双锁紧90度弯接头
Zinc Alloy 90-Degree Double Locked Fitting
- 72 LNE-DWJ0 锌合金双锁紧45度弯接头
Zinc Alloy 45-Degree Double Locked Fitting
- 73 LNE-MBG 金属软管电缆接头
Cable Gland For Metal Flexible Conduit
- 74 LNE-MSD 塑料软管电缆接头
Cable Gland For Plastic Flexible Conduit
- 75 LNE-DPM 美标软管接头
American Standard Flexible Conduit Connector
- 76 LNE-DWM 美标软管90度弯头
American Standard 90 Degree Connector

LNE-JS 镀锌金属软管

Galvanized Steel Flexible Conduit




技术参数

产品材质	采用热镀锌钢带。
产品认证	CE认证。

Technical Parameters

Product material	adopting hot-dipped galvanized steel band.
Certification	CE

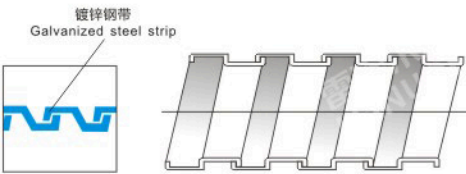

订货号 Order No.	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JS-6	Φ 6	3/16"	8.1±0.5	40	200
LNE-JS-8	Φ 8	1/4"	10.3±0.5	45	100
LNE-JS-10	Φ 10	5/16"	13±0.4	55	100
LNE-JS-13	Φ 13	3/8"	15.2±0.4	65	100
LNE-JS-16	Φ 16	1/2"	18.8±0.4	85	100
LNE-JS-20	Φ 20	3/4"	22.9±0.5	100	50
LNE-JS-25	Φ 25	1"	27.9±0.5	120	50
LNE-JS-32	Φ 32	1 1/4"	36.2±0.5	150	25
LNE-JS-38	Φ 38	1 1/2"	42.8±0.6	180	25
LNE-JS-51	Φ 51	2"	56.2±0.7	220	20
LNE-JS-64	Φ 64	2 1/2"	69.3±1.0	310	20
LNE-JS-75	Φ 75	3"	83.0±1.0	350	20
LNE-JS-100	Φ 100	4"	107.0±2.0	410	10
LNE-JS-125	Φ 125	5"	134.7±2.0	460	5
LNE-JS-150	Φ 150	6"	158.7±2.0	500	5

P4 Interlocked Galvanized Steel Flexible Conduit

LNE-JS-P4 双扣镀锌金属软管





技术参数

产品材质	采用热镀锌钢带。
产品特性	双扣镀锌金属软管，具有柔软与弯曲性能，内部平滑构造，在穿引电线电缆时极容易。
双扣结构	有很强的抗拉性、耐高温。
产品认证	CE认证。

Technical Parameters


Product material	adopting hot-dipped galvanized steel band.
Property	Interlocked galvanized metal Conduit lighter than other products, having Super soft and excellent bending performance, internal smooth structure is very easy for the entry easy of wire and cable.
Double locked structure	has strong tensile resistant, high temperature resistant.
Certification	CE

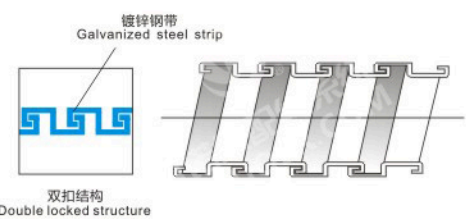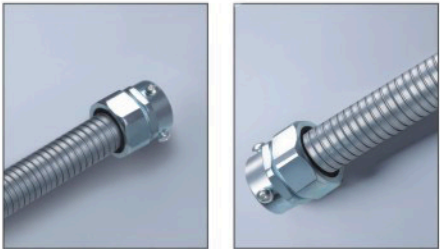

订货号 Order No.	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JS-P4-10	Φ 10	5/16"	12.6±0.5	55	100
LNE-JS-P4-13	Φ 13	3/8"	14.5±0.5	65	100
LNE-JS-P4-16	Φ 16	1/2"	17.9±0.6	85	100
LNE-JS-P4-20	Φ 20	3/4"	22.8±0.6	100	50
LNE-JS-P4-25	Φ 25	1"	28.7±0.6	120	50
LNE-JS-P4-32	Φ 32	1 1/4"	35.9±0.6	150	25
LNE-JS-P4-38	Φ 38	1 1/2"	42.5±0.8	180	25
LNE-JS-P4-51	Φ 51	2"	53.8±0.8	220	20
LNE-JS-P4-64	Φ 64	2 1/2"	69.0±2.0	310	20
LNE-JS-P4-75	Φ 75	3"	83.0±2.0	350	20
LNE-JS-P4-100	Φ 100	4"	107.0±2.0	410	10
LNE-JS-P4-125	Φ 125	5"	134.5±2.0	460	5
LNE-JS-P4-150	Φ 150	6"	158.0±2.0	500	5

LNE-JSH 201不锈钢金属软管

201 Stainless Steel Flexible Conduit

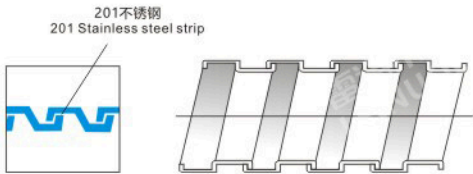

技术参数

产品材质	采用201不锈钢带制成，国标厚度制作，具柔软与弯曲性能，内部平滑构造，在穿引电线电缆时极容易。
产品认证	RoHS、CE认证。



Technical Parameters

Product material	adopting 201 stainless steel strip,national standard thickness of production, having super soft and excellent bending performance ,internal smooth structure is very easy for the entry of wire and cable.
Certification	RoHS,CE

订货号 Order No.	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSH-201-6	Φ6	3/16"	8.1±0.5	40	200
LNE-JSH-201-8	Φ8	1/4"	10.3±0.5	45	100
LNE-JSH-201-10	Φ10	5/16"	13±0.4	55	100
LNE-JSH-201-13	Φ13	3/8"	15.2±0.4	65	100
LNE-JSH-201-16	Φ16	1/2"	18.8±0.4	85	100
LNE-JSH-201-20	Φ20	3/4"	22.9±0.5	100	50
LNE-JSH-201-25	Φ25	1"	27.9±0.5	120	50
LNE-JSH-201-32	Φ32	1 1/4"	36.2±0.5	150	25
LNE-JSH-201-38	Φ38	1 1/2"	42.8±0.6	180	25
LNE-JSH-201-51	Φ51	2"	56.2±0.7	220	20
LNE-JSH-201-64	Φ64	2 1/2"	69.3±1.0	310	20
LNE-JSH-201-75	Φ75	3"	83.0±1.0	350	20
LNE-JSH-201-100	Φ100	4"	107.0±2.0	410	10
LNE-JSH-201-125	Φ125	5"	134.7±2.0	460	5
LNE-JSH-201-150	Φ150	6"	158.7±2.0	500	5

304 Stainless Steel Flexible Conduit

LNE-JSH 304不锈钢金属软管




技术参数

产品材质	采用304不锈钢带制成，国标厚度制作，具柔软与弯曲性能，内部平滑构造，在穿引电线电缆时极容易。
产品认证	RoHS、CE认证。

Technical Parameters


Product material	adopting 304 stainless steel strip,national standard thickness of production, having super soft and excellent bending performance ,internal smooth structure is very easy for the entry of wire and cable.
Certification	RoHS,CE

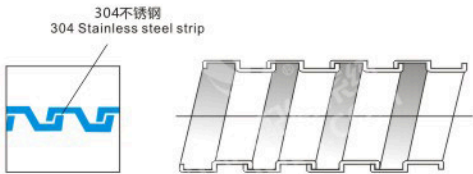

订货号 Order No.	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSH-304-6	Φ6	3/16"	8.1±0.5	40	200
LNE-JSH-304-8	Φ8	1/4"	10.3±0.5	45	100
LNE-JSH-304-10	Φ10	5/16"	13±0.4	55	100
LNE-JSH-304-13	Φ13	3/8"	15.2±0.4	65	100
LNE-JSH-304-16	Φ16	1/2"	18.8±0.4	85	100
LNE-JSH-304-20	Φ20	3/4"	22.9±0.5	100	50
LNE-JSH-304-25	Φ25	1"	27.9±0.5	120	50
LNE-JSH-304-32	Φ32	1 1/4"	36.2±0.5	150	25
LNE-JSH-304-38	Φ38	1 1/2"	42.8±0.6	180	25
LNE-JSH-304-51	Φ51	2"	56.2±0.7	220	20
LNE-JSH-304-64	Φ64	2 1/2"	69.3±1.0	310	20
LNE-JSH-304-75	Φ75	3"	83.0±1.0	350	20
LNE-JSH-304-100	Φ100	4"	107.0±2.0	410	10
LNE-JSH-304-125	Φ125	5"	134.7±2.0	460	5
LNE-JSH-304-150	Φ150	6"	158.7±2.0	500	5

LNE-JSH 316不锈钢金属软管

316 Stainless Steel Flexible Conduit

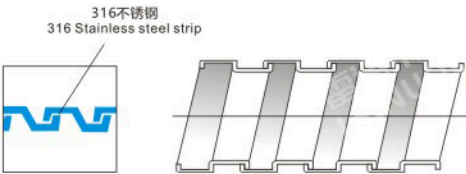

技术参数

产品材质	采用316不锈钢带制成，国标厚度制作，具柔软与弯曲性能，内部平滑构造，在穿引电线电缆时极容易。
产品认证	RoHS、CE认证。

Technical Parameters

Product material	adopting 316 stainless steel strip,national standard thickness of production, having super soft and excellent bending performance ,internal smooth structure is very easy for the entry of wire and cable.
Certification	RoHS,CE



订货号 Order No.	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSH-316-6	Φ 6	3/16"	8.1±0.5	40	200
LNE-JSH-316-8	Φ 8	1/4"	10.3±0.5	45	100
LNE-JSH-316-10	Φ 10	5/16"	13±0.4	55	100
LNE-JSH-316-13	Φ 13	3/8"	15.2±0.4	65	100
LNE-JSH-316-16	Φ 16	1/2"	18.8±0.4	85	100
LNE-JSH-316-20	Φ 20	3/4"	22.9±0.5	100	50
LNE-JSH-316-25	Φ 25	1"	27.9±0.5	120	50
LNE-JSH-316-32	Φ 32	1 1/4"	36.2±0.5	150	25
LNE-JSH-316-38	Φ 38	1 1/2"	42.8±0.6	180	25
LNE-JSH-316-51	Φ 51	2"	56.2±0.7	220	20
LNE-JSH-316-64	Φ 64	2 1/2"	69.3±1.0	310	20
LNE-JSH-316-75	Φ 75	3"	83.0±1.0	350	20
LNE-JSH-316-100	Φ 100	4"	107.0±2.0	410	10
LNE-JSH-316-125	Φ 125	5"	134.7±2.0	460	5
LNE-JSH-316-150	Φ 150	6"	158.7±2.0	500	5

P4 Interlocked 304 Stainless Steel Flexible Conduit

LNE-JSH-P4 304不锈钢双扣金属软管




技术参数

产品材质	采用不锈钢带。
产品特性	不锈钢双扣金属软管，具有柔软与弯曲性能，内部平滑构造，在穿引电线电缆时极容易。
双扣结构	有很强的抗拉性、耐高温、耐腐蚀。
产品认证	RoHS、CE认证。

Technical Parameters


Product material	adopting 304 Stainless steel band.
Property	double-locked , having Super soft and excellent bending performance,internal smooth structure is very easy for the entry of wire and cable.
Double locked structure	has strong tensile resistant,high temperature resistant, corrosion resistant.
Certification	RoHS,CE

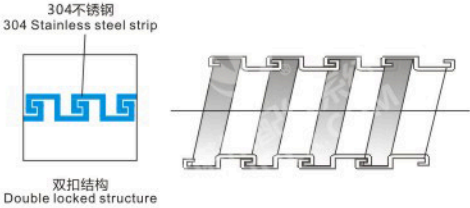

订货号 Order No.	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSH-P4-6	Φ 6	3/16"	8.1±0.5	40	200
LNE-JSH-P4-8	Φ 8	1/4"	10.3±0.5	45	100
LNE-JSH-P4-10	Φ 10	5/16"	12.6±0.5	55.0	100
LNE-JSH-P4-13	Φ 13	3/8"	14.5±0.5	65.0	100
LNE-JSH-P4-16	Φ 16	1/2"	17.9±0.6	85.0	100
LNE-JSH-P4-20	Φ 20	3/4"	22.8±0.6	100.0	50
LNE-JSH-P4-25	Φ 25	1"	28.7±0.6	120.0	50
LNE-JSH-P4-32	Φ 32	1 1/4"	35.9±0.6	150.0	25
LNE-JSH-P4-38	Φ 38	1 1/2"	42.5±0.8	180.0	25
LNE-JSH-P4-51	Φ 51	2"	53.8±0.8	220.0	20
LNE-JSH-P4-64	Φ 64	2 1/2"	69.0±2.0	310	20
LNE-JSH-P4-75	Φ 75	3"	83.0±2.0	350	20
LNE-JSH-P4-100	Φ 100	4"	107.0±2.0	410	10
LNE-JSH-P4-125	Φ 125	5"	134.5±2.0	460	5
LNE-JSH-P4-150	Φ 150	6"	159.0±2.0	500	5

LNE-UL 美标金属软管

UL Standard Metal Flexible Conduit



技术参数

产品材质 采用热镀锌钢带，具柔软与弯曲性能，内部平滑构造，在穿引电线电缆时极容易。

Technical Parameters

Product material adopting hot-dipped galvanized steel band,national standard thickness of production, having super soft and excellent bending performance, internal smooth structure is very easy for the entry of wire and cable.



订货号 Order No.	公制规格 Metric	英制规格 G system	外径(mm) Outer Diameter	外径(mm) Inner Diameter	弯曲半径(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-UL-5/16		5/16"	7.92-8.6	11.94-12.95	50	100
LNE-UL-3/8	Φ 12	3/8"	9.52-9.96	14.22-15.49	50	100
LNE-UL-9/16		9/16"	13.7-14.4	18-18.8	75	100
LNE-UL-1/2	Φ 16	1/2"	15.88-16.38	21.84-23.37	75	100
LNE-UL-3/4	Φ 21	3/4"	20.62-21.21	26.54-28.07	100	100
LNE-UL-1	Φ 27	1"	25.4-26.46	33.02-35.05	125	100
LNE-UL-1-1/4	Φ 35	1-1/4"	31.75-33.02	39.37-41.4	160	50
LNE-UL-1-1/2	Φ 41	1-1/2"	38.10-40.10	46.99-49.53	190	50
LNE-UL-2	Φ 53	2"	50.8-52.83	59.69-62.23	255	25
LNE-UL-2-1/2	Φ 63	2-1/2"	> 63.5	72.64-77.72	320	25
LNE-UL-3	Φ 78	3"	> 76.2	85.34-90.42	380	25
LNE-UL-3-1/2	Φ 91	3-1/2"	> 88.9	98.04-103.12	450	25
LNE-UL-4	Φ 103	4"	> 101.6	110.74-115.82	510	25

Explosion-Proof Stainless Steel Braided Conduit

LNE-JSGH 不锈钢编织金属软管



技术参数


产品材质 (外层) 采用不锈钢编织网，(中间层) 采用PVC，(内层) 采用镀锌钢。

工作温度 -10°C至+80°C，短时可达+100°C，可定制抗高温耐低温产品。

Technical Parameters

Product material outer layer adopting 304 stainless steel braid,middle layer adopting PVC,inner layer adopting galvanized steel.


Working temperature 10°C ~ +80°C, instantaneously can be +100°C, can be customized high temperature and low temperature resistant products.

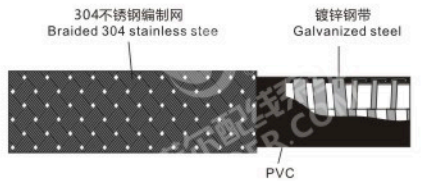

订货号 Order No.	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSGH-13	Φ 13	3/8"	18.3±1.0	100.0	50
LNE-JSGH-16	Φ 16	1/2"	24.5±1.0	120.0	50
LNE-JSGH-20	Φ 20	3/4"	27.2±1.0	160.0	50
LNE-JSGH-25	Φ 25	1"	33.0±1.0	300.0	50
LNE-JSGH-32	Φ 32	1 1/4"	44.2±1.0	440.0	20
LNE-JSGH-38	Φ 38	1 1/2"	53.5±2.0	620.0	20
LNE-JSGH-51	Φ 51	2"	68.0±2.0	800.0	20
LNE-JSGH-64	Φ 64	2 1/2"	84.0±2.0	1060.0	10

LNE-JSB 包塑金属软管

Corrugated PVC Coated Flexible Conduit

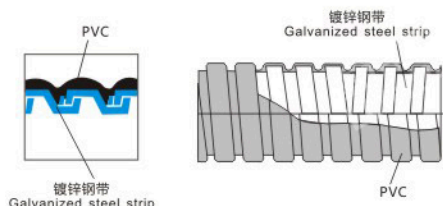

技术参数

产品材质	(内层) 采用镀锌钢带及特殊防腐处理; (外层) 采用PVC原料。
工作温度	-10℃至+80℃, 短时可达+100℃, 可定制抗高温耐低温产品。
产品认证	RoHS、CE认证、V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性, 抗拉性。 2、表面采用PVC材料, 且PVC塑料中添加了防火阻燃剂。 3、结构为反扣型, 增加抗拉强度、不容易折断或变形。 4、弯曲性能好, 内部平滑构造, 在穿引电线电缆时极容易。



Technical Parameters

Product material	(inner layer) adopting hot-dipped galvanized steel band with special anticorrosion treatment. (outer layer) adopting PVC raw material .
Working temperature	-10℃~ +80℃, instantaneously can be +100℃, can be customized high temperature and low temperature resistant products.
Certification	RoHS,CE,flame retardant certification : FV-0 (customized).
Color	Black,Grey
Working temperature	1.excellent waterproof ,insulation and tensile strength. 2.PVC surface thickened layer, smooth appearance , and with flame retardant. 3.Square locked structure increase the tensile strength, not easily broken or deformed. 4.Super soft and excellent bending performance, internal smooth structure is very easy for the entry of wire and cable.

订货号*黑色 Order No. Black	订货号*灰色 Order No.Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSB-6B	LNE-JSB-6G	Φ 6	3/16"	8.8±0.5	40.0	200
LNE-JSB-8B	LNE-JSB-8G	Φ 8	1/4"	10.3±0.5	45.0	100
LNE-JSB-10B	LNE-JSB-10G	Φ 10	5/16"	13.0±0.4	55.0	100
LNE-JSB-13B	LNE-JSB-13G	Φ 13	3/8"	16.2±0.4	65.0	100
LNE-JSB-16B	LNE-JSB-16G	Φ 16	1/2"	19.8±0.4	85.0	100
LNE-JSB-20B	LNE-JSB-20G	Φ 20	3/4"	23.9±0.5	100.0	50
LNE-JSB-25B	LNE-JSB-25G	Φ 25	1"	29.1±0.5	120.0	50
LNE-JSB-32B	LNE-JSB-32G	Φ 32	1 1/4"	37.4±0.5	150.0	25
LNE-JSB-38B	LNE-JSB-38G	Φ 38	1 1/2"	44.2±0.6	180.0	25
LNE-JSB-51B	LNE-JSB-51G	Φ 51	2"	57.8±0.7	220.0	20
LNE-JSB-64B	LNE-JSB-64G	Φ 64	2 1/2"	71.2±1.0	310.0	20
LNE-JSB-75B	LNE-JSB-75G	Φ 75	3"	86.8±1.0	350.0	20
LNE-JSB-100B	LNE-JSB-100G	Φ 100	4"	109.6±2.0	410.0	10
LNE-JSB-125B	LNE-JSB-125G	Φ 125	5"	137.5±2.0	460.0	5
LNE-JSB-150B	LNE-JSB-150G	Φ 150	6"	162.2±2.0	500.0	5

P4 Interlocked Corrugated PVC Coated Flexible Conduit

LNE-JSB-P4 双扣包塑金属软管




技术参数

产品材质	(内层) 采用镀锌钢带及特殊防腐处理; (外层) 采用PVC原料。
工作温度	-10℃至+80℃, 短时可达+100℃, 可定制抗高温耐低温产品。
产品认证	RoHS、CE认证、V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	双扣镀锌金属软管, 重量比其他产品轻, 柔软与弯曲性能好, 内部平滑构造在穿引电线时极容易。
双扣结构	有很强的抗拉性、耐高温。

Technical Parameters



Product material	(inner layer) adopting hot-dipped galvanized steel band with special anticorrosion treatment. (outer layer) adopting PVC raw material.
Working temperature	-10℃~ +80℃, instantaneously can be +100℃, can be customized high temperature and low temperature resistant products.
Certification	RoHS,CE,flame retardant certification FV-0 (customized).
Color	Black,Grey
Property	Interlocked galvanized metal Conduit lighter than other products, having super soft and excellent bending performance, internal smooth structure is very easy for the entry of wire and cable.
Double locked structure	has strong tensile resistant,high temperature resistant.

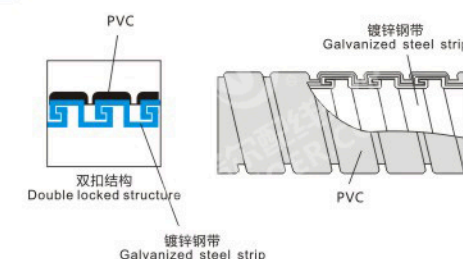

订货号*黑色 Order No. Black	订货号*灰色 Order No.Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSB-P4-10B	LNE-JSB-P4-10G	Φ 10	5/16"	13.8±0.5	55.0	100
LNE-JSB-P4-13B	LNE-JSB-P4-13G	Φ 13	3/8"	15.9±0.5	65.0	100
LNE-JSB-P4-16B	LNE-JSB-P4-16G	Φ 16	1/2"	19.4±0.5	85.0	100
LNE-JSB-P4-20B	LNE-JSB-P4-20G	Φ 20	3/4"	24.3±0.5	100.0	50
LNE-JSB-P4-25B	LNE-JSB-P4-25G	Φ 25	1"	30.2±0.5	120.0	50
LNE-JSB-P4-32B	LNE-JSB-P4-32G	Φ 32	1 1/4"	37.6±0.5	150.0	25
LNE-JSB-P4-38B	LNE-JSB-P4-38G	Φ 38	1 1/2"	44.5±0.5	180.0	25
LNE-JSB-P4-51B	LNE-JSB-P4-51G	Φ 51	2"	55.8±0.5	220.0	20
LNE-JSB-P4-64B	LNE-JSB-P4-64G	Φ 64	2 1/2"	70.8±2.0	310.0	20
LNE-JSB-P4-75B	LNE-JSB-P4-75G	Φ 75	3"	84.8±2.0	350.0	20
LNE-JSB-P4-100B	LNE-JSB-P4-100G	Φ 100	4"	109.6±2.0	410.0	10
LNE-JSB-P4-125B	LNE-JSB-P4-125G	Φ 125	5"	137.3±2.0	460.0	5
LNE-JSB-P4-150B	LNE-JSB-P4-150G	Φ 150	6"	162±2.0	500.0	5

LNE-JSBH 201不锈钢包塑金属软管

201 Stainless Steel Corrugated PVC
Coated Flexible Conduit

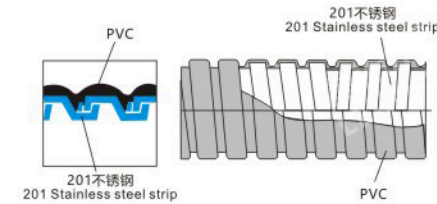

技术参数

产品材质	(内层) 采用201不锈钢带制成, (外层) 采用PVC原料。
工作温度	-10°C至+80°C, 短时可达+100°C, 可定制抗高温耐低温产品。
产品认证	RoHS、CE认证、V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性, 抗拉性。 2、表面采用阻燃PVC材料, 内部采用201不锈钢带耐腐蚀。 3、结构为反扣型, 增加抗拉强度、不容易折断或变形。 4、弯曲性能好, 内部平滑构造, 在穿引电线电缆时极容易。



Technical Parameters

Product material	(inner layer) adopting 201 stainless steel strip, (outer layer) adopting PVC raw material .
Working temperature	-10°C~+80°C, instantaneously can be +100°C, can be customized high temperature and low temperature resistant products.
Certification	RoHS,CE,flame retardant certification : FV-0 (customized).
Color	Black,Grey
Working temperature	1.excellent waterproof ,insulation and tensile strength. 2.PVC surface with flame retardant, inner layer adopting 201 stainless steel strip with corrosion resistance. 3.Square locked structure increase the tensile strength, not easily broken or deformed. 4.Super soft and excellent bending performance, internal smooth structure is very easy for the entry of wire and cable.

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSBH-201-6B	LNE-JSBH-201-6G	Φ 6	3/16"	8.8±0.25	40.0	200
LNE-JSBH-201-8B	LNE-JSBH-201-8G	Φ 8	1/4"	11.3±0.40	45.0	100
LNE-JSBH-201-10B	LNE-JSBH-201-10G	Φ 10	5/16"	14.1±0.40	55.0	100
LNE-JSBH-201-13B	LNE-JSBH-201-13G	Φ 13	3/8"	16.4±0.50	65.0	100
LNE-JSBH-201-16B	LNE-JSBH-201-16G	Φ 16	1/2"	20.2±0.50	85.0	100
LNE-JSBH-201-20B	LNE-JSBH-201-20G	Φ 20	3/4"	24.2±0.50	100.0	50
LNE-JSBH-201-25B	LNE-JSBH-201-25G	Φ 25	1"	29.4±0.60	120.0	50
LNE-JSBH-201-32B	LNE-JSBH-201-32G	Φ 32	1 1/4"	37.7±0.70	150.0	25
LNE-JSBH-201-38B	LNE-JSBH-201-38G	Φ 38	1 1/2"	44.5±0.80	180.0	25
LNE-JSBH-201-51B	LNE-JSBH-201-51G	Φ 51	2"	58.2±1.00	220.0	20
LNE-JSBH-201-64B	LNE-JSBH-201-64G	Φ 64	2 1/2"	71.8±1.50	310.0	20
LNE-JSBH-201-75B	LNE-JSBH-201-75G	Φ 75	3"	85.6±2.00	350.0	20
LNE-JSBH-201-100B	LNE-JSBH-201-100G	Φ 100	4"	110.6±2.50	410.0	10
LNE-JSBH-201-125B	LNE-JSBH-201-125G	Φ 125	5"	139.7±3.00	460.0	5
LNE-JSBH-201-150B	LNE-JSBH-201-150G	Φ 150	6"	163.4±3.00	500.0	5

304 Stainless Steel Corrugated PVC
Coated Flexible Conduit

LNE-JSBH 304不锈钢包塑金属软管




技术参数

产品材质	(内层) 采用304不锈钢带制成, (外层) 采用PVC原料。
工作温度	-10°C至+80°C, 短时可达+100°C, 可定制抗高温耐低温产品。
产品认证	RoHS、CE认证、V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性, 抗拉性。 2、表面采用阻燃PVC材料, 内部采用304不锈钢带耐腐蚀。 3、结构为反扣型, 增加抗拉强度、不容易折断或变形。 4、弯曲性能好, 内部平滑构造, 在穿引电线电缆时极容易。

Technical Parameters

Product material	(inner layer) adopting 304 stainless steel strip, (outer layer) adopting PVC raw material .
Working temperature	-10°C~+80°C, instantaneously can be +100°C, can be customized high temperature and low temperature resistant products.
Certification	RoHS,CE,flame retardant certification : FV-0 (customized).
Color	Black,Grey
Working temperature	1.excellent waterproof ,insulation and tensile strength. 2.PVC surface with flame retardant, inner layer adopting 304 stainless steel strip with corrosion resistance. 3.Square locked structure increase the tensile strength, not easily broken or deformed. 4.Super soft and excellent bending performance, internal smooth structure is very easy for the entry of wire and cable.

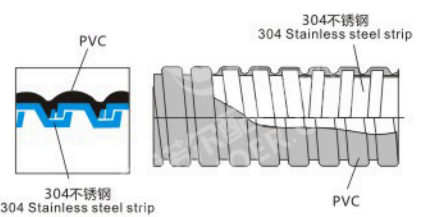

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSBH-304-6B	LNE-JSBH-304-6G	Φ 6	3/16"	8.8±0.25	40.0	200
LNE-JSBH-304-8B	LNE-JSBH-304-8G	Φ 8	1/4"	11.3±0.40	45.0	100
LNE-JSBH-304-10B	LNE-JSBH-304-10G	Φ 10	5/16"	14.1±0.40	55.0	100
LNE-JSBH-304-13B	LNE-JSBH-304-13G	Φ 13	3/8"	16.4±0.50	65.0	100
LNE-JSBH-304-16B	LNE-JSBH-304-16G	Φ 16	1/2"	20.2±0.50	85.0	100
LNE-JSBH-304-20B	LNE-JSBH-304-20G	Φ 20	3/4"	24.2±0.50	100.0	50
LNE-JSBH-304-25B	LNE-JSBH-304-25G	Φ 25	1"	29.4±0.60	120.0	50
LNE-JSBH-304-32B	LNE-JSBH-304-32G	Φ 32	1 1/4"	37.7±0.70	150.0	25
LNE-JSBH-304-38B	LNE-JSBH-304-38G	Φ 38	1 1/2"	44.5±0.80	180.0	25
LNE-JSBH-304-51B	LNE-JSBH-304-51G	Φ 51	2"	58.2±1.00	220.0	20
LNE-JSBH-304-64B	LNE-JSBH-304-64G	Φ 64	2 1/2"	71.8±1.50	310.0	20
LNE-JSBH-304-75B	LNE-JSBH-304-75G	Φ 75	3"	85.6±2.00	350.0	20
LNE-JSBH-304-100B	LNE-JSBH-304-100G	Φ 100	4"	110.6±2.50	410.0	10
LNE-JSBH-304-125B	LNE-JSBH-304-125G	Φ 125	5"	139.7±3.00	460.0	5
LNE-JSBH-304-150B	LNE-JSBH-304-150G	Φ 150	6"	163.4±3.00	500.0	5

LNE-JSBH 316不锈钢包塑金属软管

316 Stainless Steel Corrugated PVC Coated Flexible Conduit




技术参数

产品材质	(内层) 采用316不锈钢带制成, (外层) 采用PVC原料。
工作温度	-10℃至+80℃, 短时可达+100℃, 可定制抗高温耐低温产品。
产品认证	RoHS、CE认证、V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性、抗拉性。 2、表面采用阻燃PVC材料, 内部采用316不锈钢带耐腐蚀。 3、结构为反扣型, 增加抗拉强度、不容易折断或变形。 4、弯曲性能好, 内部平滑构造, 在穿引电线电缆时极容易。



Technical Parameters

Product material	(inner layer) adopting 316 stainless steel strip, (outer layer) adopting PVC raw material.
Working temperature	-10℃~+80℃, instantaneously can be +100℃, can be customized high temperature and low temperature resistant products.
Certification	RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black, Grey
Working temperature	1. excellent waterproof, insulation and tensile strength. 2. PVC surface with flame retardant, inner layer adopting 316 stainless steel strip with corrosion resistance. 3. Square locked structure increase the tensile strength, not easily broken or deformed. 4. Super soft and excellent bending performance, internal smooth structure is very easy for the entry of wire and cable.

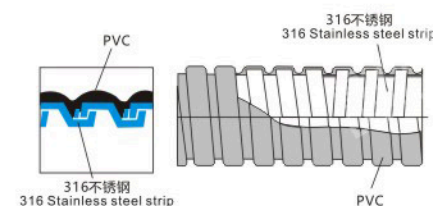

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSBH-316-6B	LNE-JSBH-316-6G	Φ 6	3/16"	8.8±0.25	40.0	200
LNE-JSBH-316-8B	LNE-JSBH-316-8G	Φ 8	1/4"	11.3±0.40	45.0	100
LNE-JSBH-316-10B	LNE-JSBH-316-10G	Φ 10	5/16"	14.1±0.40	55.0	100
LNE-JSBH-316-13B	LNE-JSBH-316-13G	Φ 13	3/8"	16.4±0.50	65.0	100
LNE-JSBH-316-16B	LNE-JSBH-316-16G	Φ 16	1/2"	20.2±0.50	85.0	100
LNE-JSBH-316-20B	LNE-JSBH-316-20G	Φ 20	3/4"	24.2±0.50	100.0	50
LNE-JSBH-316-25B	LNE-JSBH-316-25G	Φ 25	1"	29.4±0.60	120.0	50
LNE-JSBH-316-32B	LNE-JSBH-316-32G	Φ 32	1 1/4"	37.7±0.70	150.0	25
LNE-JSBH-316-38B	LNE-JSBH-316-38G	Φ 38	1 1/2"	44.5±0.80	180.0	25
LNE-JSBH-316-51B	LNE-JSBH-316-51G	Φ 51	2"	58.2±1.00	220.0	20
LNE-JSBH-316-64B	LNE-JSBH-316-64G	Φ 64	2 1/2"	71.8±1.50	310.0	20
LNE-JSBH-316-75B	LNE-JSBH-316-75G	Φ 75	3"	85.6±2.00	350.0	20
LNE-JSBH-316-100B	LNE-JSBH-316-100G	Φ 100	4"	110.6±2.50	410.0	10
LNE-JSBH-316-125B	LNE-JSBH-316-125G	Φ 125	5"	139.7±3.00	460.0	5
LNE-JSBH-316-150B	LNE-JSBH-316-150G	Φ 150	6"	163.4±3.00	500.0	5

304 Stainless Steel P4 Interlocked Corrugated PVC Coated Flexible Conduit

LNE-JSBH-P4 304不锈钢双扣包塑金属软管




技术参数

产品材质	(内层) 采用304不锈钢带制成, (外层) 采用PVC原料。
工作温度	-10℃至+80℃, 短时可达+100℃, 可定制抗高温耐低温产品。
产品认证	RoHS、CE认证、V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性、抗拉性。 2、表面加厚层阻燃PVC, 机械性能更强。 内部采用304不锈钢带耐腐蚀。 3、双扣结构, 有很强的抗拉性, 不容易折断或变形。 4、内部平滑构造在穿引电线电缆时极容易。

Technical Parameters

Product material	(inner layer) adopting 304 stainless steel strip, (outer layer) adopting PVC raw material.
Working temperature	-10℃~+80℃, instantaneously can be +100℃, can be customized high temperature and low.
Certification	RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black, Grey
Property	1. Excellent waterproof, insulation and tensile strength. 2. PVC surface thickened layer with flame retardant, stronger mechanical property, inner layer adopting 304 stainless steel strip with corrosion resistance. 3. Double locked structure, strong tensile, not easily broken or deformed. 4. Internal smooth structure is very easy for the entry of wire and cable.

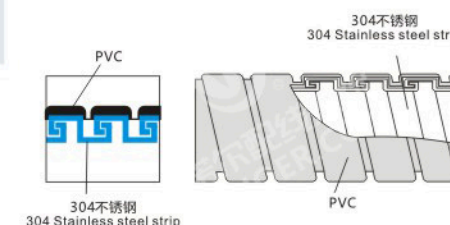

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSBH-P4-10B	LNE-JSBH-P4-10G	Φ 10	5/16"	13.8±0.5	55.0	100
LNE-JSBH-P4-13B	LNE-JSBH-P4-13G	Φ 13	3/8"	15.9±0.5	65.0	100
LNE-JSBH-P4-16B	LNE-JSBH-P4-16G	Φ 16	1/2"	19.4±0.5	85.0	100
LNE-JSBH-P4-20B	LNE-JSBH-P4-20G	Φ 20	3/4"	24.3±0.5	100.0	50
LNE-JSBH-P4-25B	LNE-JSBH-P4-25G	Φ 25	1"	30.2±0.5	120.0	50
LNE-JSBH-P4-32B	LNE-JSBH-P4-32G	Φ 32	1 1/4"	37.6±0.5	150.0	25
LNE-JSBH-P4-38B	LNE-JSBH-P4-38G	Φ 38	1 1/2"	44.5±0.5	180.0	25
LNE-JSBH-P4-51B	LNE-JSBH-P4-51G	Φ 51	2"	55.8±0.5	220.0	20
LNE-JSBH-P4-64B	LNE-JSBH-P4-64G	Φ 64	2 1/2"	70.8±2.0	310.0	20
LNE-JSBH-P4-75B	LNE-JSBH-P4-75G	Φ 75	3"	84.8±2.0	350.0	20
LNE-JSBH-P4-100B	LNE-JSBH-P4-100G	Φ 100	4"	109.6±2.0	410.0	10
LNE-JSBH-P4-125B	LNE-JSBH-P4-125G	Φ 125	5"	137.3±2.0	460.0	5
LNE-JSBH-P4-150B	LNE-JSBH-P4-150G	Φ 150	6"	162±2.0	500.0	5

LNE-JSP 平包塑金属软管

Liquid tight Smooth PVC Coated Metal Conduit




技术参数

产品材质	(内层) 采用镀锌钢带及特殊防腐处理; (外层) 采用PVC原料。
工作温度	-10℃至+80℃, 短时可达+100℃, 可定制抗高温耐低温产品。
产品认证	RoHS、CE认证、V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性、抗拉性。 2、表面加厚层PVC, 外表平滑, 且PVC塑料中添加了防火阻燃剂。 3、结构为反扣型增加抗拉强度、不容易折断或变形。 4、内部平滑构造在穿引电线电缆时极容易。



Technical Parameters

Product material	(inner layer) adopting hot-dipped galvanized steel band with special anticorrosion treatment. (outer layer) adopting PVC raw material.
Working temperature	-10℃~+80℃, instantaneously can be +100℃, can be customized high temperature and low temperature resistant products.
Certification	RoHS, CE, flame retardant certification FV-0 (customized).
Color	Black, Grey
Working temperature	1. Excellent waterproof, insulation and tensile strength. 2. PVC surface thickened layer, smooth appearance, and with flame retardant. 3. Square locked structure increase the tensile strength, not easily broken or deformed. 4. Internal smooth structure is very easy for the entry of wire and cable.

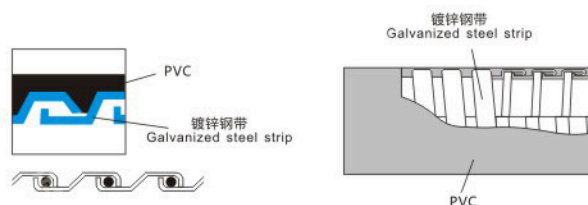

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSP-10B	LNE-JSP-10G	Φ 10	5/16"	15.0±0.5	55.0	100
LNE-JSP-13B	LNE-JSP-13G	Φ 13	3/8"	17.3±0.5	65.0	50
LNE-JSP-16B	LNE-JSP-16G	Φ 16	1/2"	20.8±0.5	85.0	50
LNE-JSP-20B	LNE-JSP-20G	Φ 20	3/4"	25.9±0.5	100.0	50
LNE-JSP-25B	LNE-JSP-25G	Φ 25	1"	31.9±0.5	120.0	50
LNE-JSP-32B	LNE-JSP-32G	Φ 32	1 1/4"	41.8±0.5	150.0	20
LNE-JSP-38B	LNE-JSP-38G	Φ 38	1 1/2"	47.0±0.5	180.0	20
LNE-JSP-51B	LNE-JSP-51G	Φ 51	2"	59.4±1.0	220.0	20
LNE-JSP-64B	LNE-JSP-64G	Φ 64	2 1/2"	71.7±1.0	310.0	10
LNE-JSP-75B	LNE-JSP-75G	Φ 75	3"	87.5±1.0	350.0	10
LNE-JSP-100B	LNE-JSP-100G	Φ 100	4"	112.5±2.0	410.0	5

304 Stainless Steel P4 Interlocked Liquid-tight Smooth PVC Coated Metal Conduit

LNE-JSPH-P4 304不锈钢双扣平包塑金属软管




技术参数

产品材质	(内层) 采用304不锈钢带制成, (外层) 采用PVC原料。
工作温度	-10℃至+80℃, 短时可达+100℃, 可定制抗高温耐低温产品。
产品认证	RoHS、CE认证、V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	1.软管具有防水、绝缘性、抗拉性。 2.表面加厚层阻燃PVC, 机械性能更强。 3.双扣结构, 有很强的抗拉性, 不容易折断或变形。 4.内部平滑构造在穿引电线电缆时极容易。

Technical Parameters


Product material	(inner layer) adopting 304 stainless steel strip, (outer layer) adopting PVC raw material.
Working temperature	-10℃~+80℃, instantaneously can be +100℃, can be customized high temperature and low.
Certification	RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black, Grey
Property	1. Excellent waterproof, insulation and tensile strength. 2. PVC surface thickened layer with flame retardant, stronger mechanical property, inner layer adopting 304 stainless steel strip with corrosion resistance. 3. Double locked structure, strong tensile, not easily broken or deformed. 4. Internal smooth structure is very easy for the entry of wire and cable.

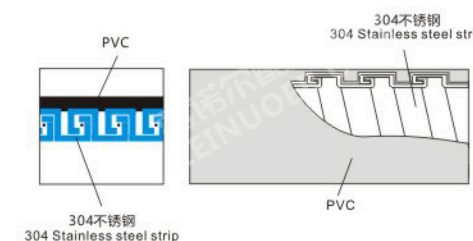

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSPH-P4-10B	LNE-JSPH-P4-10G	Φ 10	5/16"	14.8±0.6	55.0	100
LNE-JSPH-P4-13B	LNE-JSPH-P4-13G	Φ 13	3/8"	16.9±0.5	65.0	50
LNE-JSPH-P4-16B	LNE-JSPH-P4-16G	Φ 16	1/2"	20.1±0.5	85.0	50
LNE-JSPH-P4-20B	LNE-JSPH-P4-20G	Φ 20	3/4"	24.8±0.5	100.0	50
LNE-JSPH-P4-25B	LNE-JSPH-P4-25G	Φ 25	1"	31.8±0.6	120.0	50
LNE-JSPH-P4-32B	LNE-JSPH-P4-32G	Φ 32	1 1/4"	41.8±0.5	150.0	20
LNE-JSPH-P4-38B	LNE-JSPH-P4-38G	Φ 38	1 1/2"	47.0±0.5	180.0	20
LNE-JSPH-P4-51B	LNE-JSPH-P4-51G	Φ 51	2"	59.4±1.0	220.0	20
LNE-JSPH-P4-64B	LNE-JSPH-P4-64G	Φ 64	2 1/2"	71.7±1.0	310.0	10
LNE-JSPH-P4-75B	LNE-JSPH-P4-75G	Φ 75	3"	87.5±1.0	350.0	10
LNE-JSPH-P4-100B	LNE-JSPH-P4-100G	Φ 100	4"	112.5±2.0	410.0	5

LNE-TPU TPU包塑金属软管

Corrugated TPU Coated Flexible Conduit

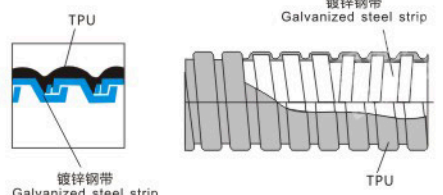

技术参数

产品材质	(内层)采用镀锌钢带及特殊防腐处理; (外层)采用TPU原料(低烟无卤)。
工作温度	-10℃至+80℃, 短时可达+100℃, 可定制耐高温耐低温产品。
产品认证	无卤认证、低烟认证、RoHS、CE认证、 V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性, 抗拉性。 2、表面采用TPU材料低烟无卤、环保安全。内部采用热镀锌钢带 3、结构为反扣型, 增加抗拉强度、不容易折断或变形。 4、弯曲性能好, 内部平滑构造, 在穿引电线电缆时极容易。



Technical Parameters

Product material	(inner layer) adopting hot-dipped galvanized steel band with special anticorrosion treatment.(outer layer) adopting TPU raw material (low smoke zero halogen).
Working temperature	-10℃ ~ +80℃, instantaneously can be +100℃, can be customized high temperature and low temperature resistant products.
Certification	VDE, RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black,Grey
Working temperature	1. excellent waterproof, insulation and tensile strength. 2. TPU surface, low smoke zero halogen and safe, inner layer adopting hot-dipped galvanized steel band with . 3. Square locked structure increase the tensile strength, not easily broken or deformed. 4. Super soft and excellent bending performance, internal smooth structure is very easy for the entry of wire and cable.

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-TPU-6B	LNE-TPU-6G	Φ 6	3/16"	8.8±0.5	40.0	200
LNE-TPU-8B	LNE-TPU-8G	Φ 8	1/4"	10.3±0.5	45.0	100
LNE-TPU-10B	LNE-TPU-10G	Φ 10	5/16"	13.0±0.4	55.0	100
LNE-TPU-13B	LNE-TPU-13G	Φ 13	3/8"	16.2±0.4	65.0	100
LNE-TPU-16B	LNE-TPU-16G	Φ 16	1/2"	19.8±0.4	85.0	100
LNE-TPU-20B	LNE-TPU-20G	Φ 20	3/4"	23.9±0.5	100.0	50
LNE-TPU-25B	LNE-TPU-25G	Φ 25	1"	29.1±0.5	120.0	50
LNE-TPU-32B	LNE-TPU-32G	Φ 32	1 1/4"	37.4±0.5	150.0	25
LNE-TPU-38B	LNE-TPU-38G	Φ 38	1 1/2"	44.2±0.6	180.0	25
LNE-TPU-51B	LNE-TPU-51G	Φ 51	2"	57.8±0.7	220.0	20
LNE-TPU-64B	LNE-TPU-64G	Φ 64	2 1/2"	71.2±1.0	310.0	20
LNE-TPU-75B	LNE-TPU-75G	Φ 75	3"	86.8±1.0	350.0	20
LNE-TPU-100B	LNE-TPU-100G	Φ 100	4"	109.6±2.0	410.0	10
LNE-TPU-125B	LNE-TPU-125G	Φ 125	5"	137.5±2.0	460.0	5
LNE-TPU-150B	LNE-TPU-150G	Φ 150	6"	162.2±2.0	500.0	5

P4 Interlocked Corrugated TPU Coated Flexible Conduit

LNE-TPU-P4 双扣TPU包塑金属软管




技术参数

产品材质	(内层)采用镀锌钢带及特殊防腐处理; (外层)采用TPU原料(低烟无卤)。
工作温度	-10℃至+80℃, 短时可达+100℃, 可定制耐高温耐低温产品。
产品认证	无卤认证、低烟认证、RoHS、CE认证、 V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性、抗拉性。 2、表面采用TPU材料低烟无卤、环保安全。内部采用热镀锌钢带 3、双扣结构, 有很强的抗拉性, 不容易折断或变形。 4、内部平滑构造在穿引电线电缆时极容易。

Technical Parameters

Product material	(inner layer) adopting hot-dipped galvanized steel band with special anticorrosion treatment.(outer layer) adopting TPU raw material (low smoke zero halogen).
Working temperature	-10℃ ~ +80℃, instantaneously can be +100℃, can be customized high temperature and low temperature resistant products.
Certification	VDE, RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black,Grey
Working temperature	1. Excellent waterproof, insulation and tensile strength. 2. TPU surface, low smoke zero halogen and safe, inner layer adopting hot-dipped galvanized steel band with . 3. Double locked structure, strong tensile, not easily broken or deformed. 4. Internal smooth structure is very easy for the entry of wire and cable.



订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-TPU-P4-10B	LNE-TPU-P4-10G	Φ 10	5/16"	13.8±0.5	55.0	100
LNE-TPU-P4-13B	LNE-TPU-P4-13G	Φ 13	3/8"	15.9±0.5	65.0	100
LNE-TPU-P4-16B	LNE-TPU-P4-16G	Φ 16	1/2"	19.4±0.5	85.0	100
LNE-TPU-P4-20B	LNE-TPU-P4-20G	Φ 20	3/4"	24.3±0.5	100.0	50
LNE-TPU-P4-25B	LNE-TPU-P4-25G	Φ 25	1"	30.2±0.5	120.0	50
LNE-TPU-P4-32B	LNE-TPU-P4-32G	Φ 32	1 1/4"	37.6±0.5	150.0	25
LNE-TPU-P4-38B	LNE-TPU-P4-38G	Φ 38	1 1/2"	44.5±0.5	180.0	25
LNE-TPU-P4-51B	LNE-TPU-P4-51G	Φ 51	2"	55.8±0.5	220.0	20
LNE-TPU-P4-64B	LNE-TPU-P4-64G	Φ 64	2 1/2"	70.8±2.0	310.0	20
LNE-TPU-P4-75B	LNE-TPU-P4-75G	Φ 75	3"	84.8±2.0	350.0	20
LNE-TPU-P4-100B	LNE-TPU-P4-100G	Φ 100	4"	109.6±2.0	410.0	10
LNE-TPU-P4-125B	LNE-TPU-P4-125G	Φ 125	5"	137.3±2.0	460.0	5
LNE-TPU-P4-150B	LNE-TPU-P4-150G	Φ 150	6"	162±2.0	500.0	5

LNE-TPUH 201不锈钢TPU包塑金属软管

201 Stainless Steel Corrugated TPU Coated Flexible Conduit




技术参数

产品材质	(内层) 采用201不锈钢带制成, (外层) 采用TPU原料(低烟无卤)。
工作温度	-10°C至+80°C, 短时可达+100°C, 可定制抗高温耐低温产品。
产品认证	无卤认证、低烟认证、RoHS、CE认证、V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性, 抗拉性。 2、表面采用TPU材料低烟无卤、环保安全, 内部采用201不锈钢带耐腐蚀。 3、结构为反扣型, 增加抗拉强度、不容易折断或变形。 4、弯曲性能好, 内部平滑构造, 在穿引电线电缆时极容易。



Technical Parameters

Product material	(inner layer) adopting 201 stainless steel strip, (outer layer) adopting TPU raw material (low smoke zero halogen).
Working temperature	-10°C~+80°C, instantaneously can be +100°C, can be customized high temperature and low temperature resistant products.
Certification	VDE, RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black, Grey
Working temperature	1.excellent waterproof, insulation and tensile strength. 2. TPU surface, low smoke zero halogen and safe, inner layer adopting 201 stainless steel strip with corrosion resistance. 3. Square locked structure increase the tensile strength, not easily broken or deformed. 4. Super soft and excellent bending performance, internal smooth structure is very easy for the entry of wire and cable.

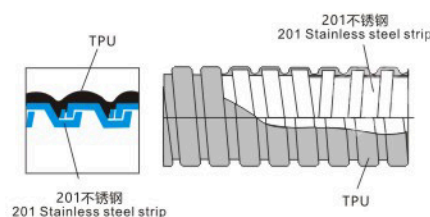

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-TPUH-201-6B	LNE-TPUH-201-6G	Φ 6	3/16"	8.8±0.25	40.0	200
LNE-TPUH-201-8B	LNE-TPUH-201-8G	Φ 8	1/4"	11.3±0.40	45.0	100
LNE-TPUH-201-10B	LNE-TPUH-201-10G	Φ 10	5/16"	14.1±0.40	55.0	100
LNE-TPUH-201-13B	LNE-TPUH-201-13G	Φ 13	3/8"	16.4±0.50	65.0	100
LNE-TPUH-201-16B	LNE-TPUH-201-16G	Φ 16	1/2"	20.2±0.50	85.0	100
LNE-TPUH-201-20B	LNE-TPUH-201-20G	Φ 20	3/4"	24.2±0.50	100.0	50
LNE-TPUH-201-25B	LNE-TPUH-201-25G	Φ 25	1"	29.4±0.60	120.0	50
LNE-TPUH-201-32B	LNE-TPUH-201-32G	Φ 32	1 1/4"	37.7±0.70	150.0	25
LNE-TPUH-201-38B	LNE-TPUH-201-38G	Φ 38	1 1/2"	44.5±0.80	180.0	25
LNE-TPUH-201-51B	LNE-TPUH-201-51G	Φ 51	2"	58.2±1.00	220.0	20
LNE-TPUH-201-64B	LNE-TPUH-201-64G	Φ 64	2 1/2"	71.8±1.50	310.0	20
LNE-TPUH-201-75B	LNE-TPUH-201-75G	Φ 75	3"	85.6±2.00	350.0	20
LNE-TPUH-201-100B	LNE-TPUH-201-100G	Φ 100	4"	110.6±2.50	410.0	10
LNE-TPUH-201-125B	LNE-TPUH-201-125G	Φ 125	5"	139.7±3.00	460.0	5
LNE-TPUH-201-150B	LNE-TPUH-201-150G	Φ 150	6"	163.4±3.00	500.0	5

304 Stainless Steel Corrugated TPU Coated Flexible Conduit

LNE-TPUH 304不锈钢TPU包塑金属软管




技术参数

产品材质	(内层) 采用304不锈钢带制成, (外层) 采用TPU原料(低烟无卤)。
工作温度	-10°C至+80°C, 短时可达+100°C, 可定制抗高温耐低温产品。
产品认证	无卤认证、低烟认证、RoHS、CE认证、V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性, 抗拉性。 2、表面采用TPU材料低烟无卤、环保安全, 内部采用304不锈钢带耐腐蚀。 3、结构为反扣型, 增加抗拉强度、不容易折断或变形。 4、弯曲性能好, 内部平滑构造, 在穿引电线电缆时极容易。

Technical Parameters

Product material	(inner layer) adopting 304 stainless steel strip, (outer layer) adopting TPU raw material (low smoke zero halogen).
Working temperature	-10°C~+80°C, instantaneously can be +100°C, can be customized high temperature and low temperature resistant products.
Certification	VDE, RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black, Grey
Working temperature	1.excellent waterproof, insulation and tensile strength. 2. TPU surface, low smoke zero halogen and safe, inner layer adopting 304 stainless steel strip with corrosion resistance. 3. Square locked structure increase the tensile strength, not easily broken or deformed. 4. Super soft and excellent bending performance, internal smooth structure is very easy for the entry of wire and cable.

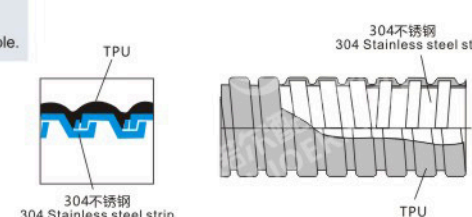

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-TPUH-304-6B	LNE-TPUH-304-6G	Φ 6	3/16"	8.8±0.25	40.0	200
LNE-TPUH-304-8B	LNE-TPUH-304-8G	Φ 8	1/4"	11.3±0.40	45.0	100
LNE-TPUH-304-10B	LNE-TPUH-304-10G	Φ 10	5/16"	14.1±0.40	55.0	100
LNE-TPUH-304-13B	LNE-TPUH-304-13G	Φ 13	3/8"	16.4±0.50	65.0	100
LNE-TPUH-304-16B	LNE-TPUH-304-16G	Φ 16	1/2"	20.2±0.50	85.0	100
LNE-TPUH-304-20B	LNE-TPUH-304-20G	Φ 20	3/4"	24.2±0.50	100.0	50
LNE-TPUH-304-25B	LNE-TPUH-304-25G	Φ 25	1"	29.4±0.60	120.0	50
LNE-TPUH-304-32B	LNE-TPUH-304-32G	Φ 32	1 1/4"	37.7±0.70	150.0	25
LNE-TPUH-304-38B	LNE-TPUH-304-38G	Φ 38	1 1/2"	44.5±0.80	180.0	25
LNE-TPUH-304-51B	LNE-TPUH-304-51G	Φ 51	2"	58.2±1.00	220.0	20
LNE-TPUH-304-64B	LNE-TPUH-304-64G	Φ 64	2 1/2"	71.8±1.50	310.0	20
LNE-TPUH-304-75B	LNE-TPUH-304-75G	Φ 75	3"	85.6±2.00	350.0	20
LNE-TPUH-304-100B	LNE-TPUH-304-100G	Φ 100	4"	110.6±2.50	410.0	10
LNE-TPUH-304-125B	LNE-TPUH-304-125G	Φ 125	5"	139.7±3.00	460.0	5
LNE-TPUH-304-150B	LNE-TPUH-304-150G	Φ 150	6"	163.4±3.00	500.0	5

LNE-TPUH 316不锈钢TPU包塑金属软管

316 Stainless Steel Corrugated TPU Coated Flexible Conduit





技术参数

产品材质	(内层) 采用316不锈钢带制成, (外层) 采用TPU原料 (低烟无卤)。
工作温度	-10°C至+80°C, 短时可达+100°C, 可定制抗高温耐低温产品。
产品认证	无卤认证、低烟认证、RoHS、CE认证、V0级阻燃认证 (可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性、抗拉性。 2、表面采用TPU材料低烟无卤、环保安全, 内部采用316不锈钢带耐腐蚀。 3、结构为反扣型, 增加抗拉强度、不容易折断或变形。 4、弯曲性能好, 内部平滑构造, 在穿引电线电缆时极容易。



Technical Parameters

Product material	(inner layer) adopting 316 stainless steel strip, (outer layer) adopting TPU raw material (low smoke zero halogen).
Working temperature	-10°C~+80°C, instantaneously can be +100°C, can be customized high temperature and low temperature resistant products.
Certification	VDE, RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black,Grey
Working temperature	1.excellent waterproof,insulation and tensile strength. 2. TPU surface, low smoke zero halogen and safe, inner layer adopting 316 stainless steel strip with corrosion resistance. 3.Square locked structure increase the tensile strength, not easily broken or deformed. 4.Super soft and excellent bending performance, internal smooth structure is very easy for the entry of wire and cable.

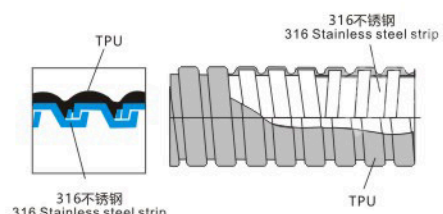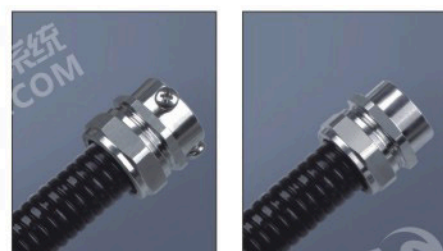

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-TPUH-316-6B	LNE-TPUH-316-6G	Φ 6	3/16"	8.8±0.25	40.0	200
LNE-TPUH-316-8B	LNE-TPUH-316-8G	Φ 8	1/4"	11.3±0.40	45.0	100
LNE-TPUH-316-10B	LNE-TPUH-316-10G	Φ 10	5/16"	14.1±0.40	55.0	100
LNE-TPUH-316-13B	LNE-TPUH-316-13G	Φ 13	3/8"	16.4±0.50	65.0	100
LNE-TPUH-316-16B	LNE-TPUH-316-16G	Φ 16	1/2"	20.2±0.50	85.0	100
LNE-TPUH-316-20B	LNE-TPUH-316-20G	Φ 20	3/4"	24.2±0.50	100.0	50
LNE-TPUH-316-25B	LNE-TPUH-316-25G	Φ 25	1"	29.4±0.60	120.0	50
LNE-TPUH-316-32B	LNE-TPUH-316-32G	Φ 32	1 1/4"	37.7±0.70	150.0	25
LNE-TPUH-316-38B	LNE-TPUH-316-38G	Φ 38	1 1/2"	44.5±0.80	180.0	25
LNE-TPUH-316-51B	LNE-TPUH-316-51G	Φ 51	2"	58.2±1.00	220.0	20
LNE-TPUH-316-64B	LNE-TPUH-316-64G	Φ 64	2 1/2"	71.8±1.50	310.0	20
LNE-TPUH-316-75B	LNE-TPUH-316-75G	Φ 75	3"	85.6±2.00	350.0	20
LNE-TPUH-316-100B	LNE-TPUH-316-100G	Φ 100	4"	110.6±2.50	410.0	10
LNE-TPUH-316-125B	LNE-TPUH-316-125G	Φ 125	5"	139.7±3.00	460.0	5
LNE-TPUH-316-150B	LNE-TPUH-316-150G	Φ 150	6"	163.4±3.00	500.0	5

304 Stainless Steel P4 Interlocked Corrugated TPU Coated Metal Conduit

LNE-TPUH-P4 304不锈钢双扣TPU包塑金属软管




技术参数

产品材质	(内层) 采用304不锈钢带制成, (外层) 采用TPU原料 (低烟无卤)。
工作温度	-10°C至+80°C, 短时可达+100°C, 可定制抗高温耐低温产品。
产品认证	无卤认证、低烟认证、RoHS、CE认证、V0级阻燃认证 (可定制)。
产品颜色	黑色、灰色
产品特性	1.软管具有防水、绝缘性、抗拉性。 2.表面采用TPU材料低烟无卤、环保安全, 内部采用304不锈钢带耐腐蚀。 3.双扣结构, 有很强的抗拉性, 不容易折断或变形。 4.内部平滑构造在穿引电线电缆时极容易。

Technical Parameters

Product material	(inner layer) adopting 304 stainless steel strip, (outer layer) adopting TPU raw material (low smoke zero halogen).
Working temperature	-10°C~+80°C, instantaneously can be +100°C, can be customized high temperature and low.
Certification	VDE, RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black,Grey
Working temperature	1. Excellent waterproof, insulation and tensile strength. 2. TPU surface, low smoke zero halogen and safe, inner layer adopting 304 stainless steel strip with corrosion resistance. 3. Double locked structure, strong tensile, not easily broken or deformed. 4. Internal smooth structure is very easy for the entry of wire and cable.

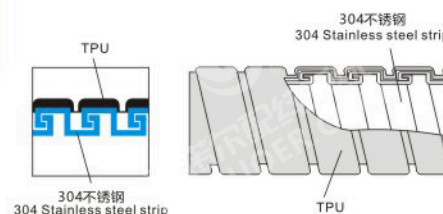

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-TPUH-P4-10B	LNE-TPUH-P4-10G	Φ 10	5/16"	13.8±0.5	55.0	100
LNE-TPUH-P4-13B	LNE-TPUH-P4-13G	Φ 13	3/8"	15.9±0.5	65.0	100
LNE-TPUH-P4-16B	LNE-TPUH-P4-16G	Φ 16	1/2"	19.4±0.5	85.0	100
LNE-TPUH-P4-20B	LNE-TPUH-P4-20G	Φ 20	3/4"	24.3±0.5	100.0	50
LNE-TPUH-P4-25B	LNE-TPUH-P4-25G	Φ 25	1"	30.2±0.5	120.0	50
LNE-TPUH-P4-32B	LNE-TPUH-P4-32G	Φ 32	1 1/4"	37.6±0.5	150.0	25
LNE-TPUH-P4-38B	LNE-TPUH-P4-38G	Φ 38	1 1/2"	44.5±0.5	180.0	25
LNE-TPUH-P4-51B	LNE-TPUH-P4-51G	Φ 51	2"	55.8±0.5	220.0	20
LNE-TPUH-P4-64B	LNE-TPUH-P4-64G	Φ 64	2 1/2"	70.8±2.0	310.0	20
LNE-TPUH-P4-75B	LNE-TPUH-P4-75G	Φ 75	3"	84.8±2.0	350.0	20
LNE-TPUH-P4-100B	LNE-TPUH-P4-100G	Φ 100	4"	109.6±2.0	410.0	10
LNE-TPUH-P4-125B	LNE-TPUH-P4-125G	Φ 125	5"	137.3±2.0	460.0	5
LNE-TPUH-P4-150B	LNE-TPUH-P4-150G	Φ 150	6"	162±2.0	500.0	5

LNE-TPUP TPU平包塑金属软管

Liquid tight Smooth TPU Coated Metal Conduit



技术参数

产品材质	(内层) 采用镀锌钢带及特殊防腐处理; (外层) 采用TPU原料。
工作温度	-10℃至+80℃, 短时可达+100℃, 可定制抗高温耐低温产品。
产品认证	无卤认证、低烟认证、RoHS、CE认证、V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性、抗拉性。 2、表面采用TPU材料,低烟无卤、环保安全。内部采用热镀锌钢带 3、结构为反扣型,增加抗拉强度、不容易折断或变形。 4、弯曲性能好,内部平滑构造,在穿引电线电缆时极容易。



Technical Parameters

Product material	(inner layer) adopting hot-dipped galvanized steel band with special anticorrosion treatment.(outer layer) adopting TPU raw material .
Working temperature	-10℃~+80℃, instantaneously can be +100℃,can be customized high temperature and low temperature resistant products.
Certification	VDE, RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black,Grey
Working temperature	1. excellent waterproof ,insulation and tensile strength. 2. TPU surface, low smoke zero halogen and safe, inner layer adopting hot-dipped galvanized steel band with . 3. Square locked structure increase the tensile strength, not easily broken or deformed. 4. Super soft and excellent bending performance, internal smooth structure is very easy for the entry of wire and cable.



订货号*黑色 Order No. Black	订货号*灰色 Order No.Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-TPUP-10B	LNE-TPUP-10G	Φ 10	5/16"	15.0±0.5	55.0	100
LNE-TPUP-13B	LNE-TPUP-13G	Φ 13	3/8"	17.3±0.5	65.0	50
LNE-TPUP-16B	LNE-TPUP-16G	Φ 16	1/2"	20.8±0.5	85.0	50
LNE-TPUP-20B	LNE-TPUP-20G	Φ 20	3/4"	25.9±0.5	100.0	50
LNE-TPUP-25B	LNE-TPUP-25G	Φ 25	1"	31.9±0.5	120.0	50
LNE-TPUP-32B	LNE-TPUP-32G	Φ 32	1 1/4"	41.8±0.5	150.0	20
LNE-TPUP-38B	LNE-TPUP-38G	Φ 38	1 1/2"	47.0±0.5	180.0	20
LNE-TPUP-51B	LNE-TPUP-51G	Φ 51	2"	59.4±1.0	220.0	20
LNE-TPUP-64B	LNE-TPUP-64G	Φ 64	2 1/2"	71.7±1.0	310.0	10
LNE-TPUP-75B	LNE-TPUP-75G	Φ 75	3"	87.5±1.0	350.0	10
LNE-TPUP-100B	LNE-TPUP-100G	Φ 100	4"	112.5±2.0	410.0	5

304 Stainless Steel P4 Interlocked Liquid-tight Smooth TPU Coated Metal Conduit

LNE-TPUPH-P4 304不锈钢双扣TPU平包塑金属软管




技术参数

产品材质	(内层) 采用304不锈钢带制成, (外层) 采用TPU原料。
工作温度	-10℃至+80℃, 短时可达+100℃, 可定制抗高温耐低温产品。
产品认证	无卤认证、低烟认证、RoHS、CE认证、V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	1.软管具有防水、绝缘性、抗拉性。 2.表面加厚层阻燃TPU, 机械性能更强。 内部采用304不锈钢带耐腐蚀。 3.双扣结构, 有很强的抗拉性, 不容易折断或变形。 4.内部平滑构造在穿引电线电缆时极容易。

Technical Parameters


Product material	(inner layer) adopting 304 stainless steel strip, (outer layer) adopting PVC raw material.
Working temperature	-10℃~+80℃, instantaneously can be +100℃, can be customized high temperature and low.
Certification	VDE, RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black,Grey
Property	1. Excellent waterproof, insulation and tensile strength. 2. TPU surface thickened layer with flame retardant, stronger mechanical property, inner layer adopting 304 stainless steel strip with corrosion resistance. 3. Double locked structure, strong tensile, not easily broken or deformed. 4. Internal smooth structure is very easy for the entry of wire and cable.

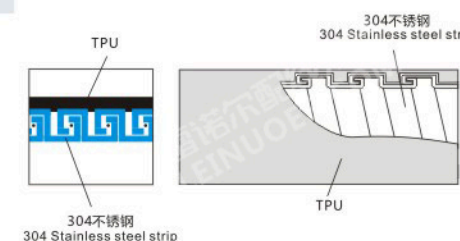

订货号*黑色 Order No. Black	订货号*灰色 Order No.Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-TPUPH-P4-10B	LNE-TPUPH-P4-10G	Φ 10	5/16"	14.8±0.6	55.0	100
LNE-TPUPH-P4-13B	LNE-TPUPH-P4-13G	Φ 13	3/8"	16.9±0.5	65.0	50
LNE-TPUPH-P4-16B	LNE-TPUPH-P4-16G	Φ 16	1/2"	20.1±0.5	85.0	50
LNE-TPUPH-P4-20B	LNE-TPUPH-P4-20G	Φ 20	3/4"	24.8±0.5	100.0	50
LNE-TPUPH-P4-25B	LNE-TPUPH-P4-25G	Φ 25	1"	31.8±0.6	120.0	50
LNE-TPUPH-P4-32B	LNE-TPUPH-P4-32G	Φ 32	1 1/4"	41.8±0.5	150.0	20
LNE-TPUPH-P4-38B	LNE-TPUPH-P4-38G	Φ 38	1 1/2"	47.0±0.5	180.0	20
LNE-TPUPH-P4-51B	LNE-TPUPH-P4-51G	Φ 51	2"	59.4±1.0	220.0	20
LNE-TPUPH-P4-64B	LNE-TPUPH-P4-64G	Φ 64	2 1/2"	71.7±1.0	310.0	10
LNE-TPUPH-P4-75B	LNE-TPUPH-P4-75G	Φ 75	3"	87.5±1.0	350.0	10
LNE-TPUPH-P4-100B	LNE-TPUPH-P4-100G	Φ 100	4"	112.5±2.0	410.0	5

LNE-JSB-PE PE包塑金属软管

Corrugated PE Coated Flexible Conduit

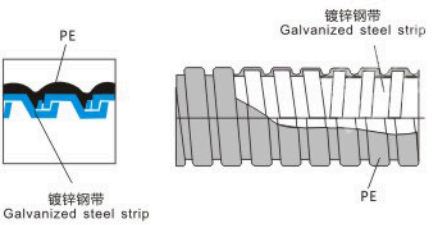

技术参数

产品材质	(内层) 采用镀锌钢带及特殊防腐处理; (外层) 采用PE原料(低烟无卤)。
工作温度	-10℃至+80℃, 短时可达+100℃, 可定制抗高温耐低温产品。
产品认证	无卤认证、低烟认证、RoHS、CE认证、 V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性, 抗拉性。 2、表面采用PE材料低烟无卤、环保安全。内部采用热镀锌钢带 3、结构为反扣型, 增加抗拉强度、不容易折断或变形。 4、弯曲性能好, 内部平滑构造, 在穿引电线电缆时极容易。



Technical Parameters

Product material	(inner layer) adopting hot-dipped galvanized steel band with special anticorrosion treatment.(outer layer) adopting PE raw material (low smoke zero halogen).
Working temperature	-10℃~ +80℃, instantaneously can be +100℃, can be customized high temperature and low temperature resistant products.
Certification	VDE, RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black,Grey
Working temperature	1. excellent waterproof, insulation and tensile strength. 2. PE surface, low smoke zero halogen and safe, inner layer adopting hot-dipped galvanized steel band with . 3. Square locked structure increase the tensile strength, not easily broken or deformed. 4. Super soft and excellent bending performance, internal smooth structure is very easy for the entry of wire and cable.

订货号*黑色 Order No. Black	订货号*灰色 Order No.Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSB-PE-6B	LNE-JSB-PE-6G	Φ 6	3/16"	8.8±0.5	40.0	200
LNE-JSB-PE-8B	LNE-JSB-PE-8G	Φ 8	1/4"	10.3±0.5	45.0	100
LNE-JSB-PE-10B	LNE-JSB-PE-10G	Φ 10	5/16"	13.0±0.4	55.0	100
LNE-JSB-PE-13B	LNE-JSB-PE-13G	Φ 13	3/8"	16.2±0.4	65.0	100
LNE-JSB-PE-16B	LNE-JSB-PE-16G	Φ 16	1/2"	19.8±0.4	85.0	100
LNE-JSB-PE-20B	LNE-JSB-PE-20G	Φ 20	3/4"	23.9±0.5	100.0	50
LNE-JSB-PE-25B	LNE-JSB-PE-25G	Φ 25	1"	29.1±0.5	120.0	50
LNE-JSB-PE-32B	LNE-JSB-PE-32G	Φ 32	1 1/4"	37.4±0.5	150.0	25
LNE-JSB-PE-38B	LNE-JSB-PE-38G	Φ 38	1 1/2"	44.2±0.6	180.0	25
LNE-JSB-PE-51B	LNE-JSB-PE-51G	Φ 51	2"	57.8±0.7	220.0	20
LNE-JSB-PE-64B	LNE-JSB-PE-64G	Φ 64	2 1/2"	71.2±1.0	310.0	20
LNE-JSB-PE-75B	LNE-JSB-PE-75G	Φ 75	3"	86.8±1.0	350.0	20
LNE-JSB-PE-100B	LNE-JSB-PE-100G	Φ 100	4"	109.6±2.0	410.0	10
LNE-JSB-PE-125B	LNE-JSB-PE-125G	Φ 125	5"	137.5±2.0	460.0	5
LNE-JSB-PE-150B	LNE-JSB-PE-150G	Φ 150	6"	162.2±2.0	500.0	5

P4 Interlocked Corrugated PE Coated Flexible Conduit

LNE-JSB-PE-P4 双扣PE包塑金属软管



技术参数

产品材质	(内层) 采用镀锌钢带及特殊防腐处理; (外层) 采用PE原料(低烟无卤)。
工作温度	-10℃至+80℃, 短时可达+100℃, 可定制抗高温耐低温产品。
产品认证	无卤认证、低烟认证、RoHS、CE认证、 V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性、抗拉性。 2、表面采用PE材料低烟无卤、环保安全。内部采用热镀锌钢带。 3、双扣结构, 有很强的抗拉性, 不容易折断或变形。 4、内部平滑构造在穿引电线电缆时极容易。

Technical Parameters



Product material	(inner layer) adopting hot-dipped galvanized steel band with special anticorrosion treatment.(outer layer) adopting PE raw material (low smoke zero halogen).
Working temperature	-10℃~ +80℃, instantaneously can be +100℃, can be customized high temperature and low temperature resistant products.
Certification	VDE, RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black,Grey
Working temperature	1. Excellent waterproof, insulation and tensile strength. 2. PE surface, low smoke zero halogen and safe, inner layer adopting hot-dipped galvanized steel band with . 3. Double locked structure, strong tensile, not easily broken or deformed. 4. Internal smooth structure is very easy for the entry of wire and cable.



订货号*黑色 Order No. Black	订货号*灰色 Order No.Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSB-PE-P4-10B	LNE-JSB-PE-P4-10G	Φ 10	5/16"	13.8±0.5	55.0	100
LNE-JSB-PE-P4-13B	LNE-JSB-PE-P4-13G	Φ 13	3/8"	15.9±0.5	65.0	100
LNE-JSB-PE-P4-16B	LNE-JSB-PE-P4-16G	Φ 16	1/2"	19.4±0.5	85.0	100
LNE-JSB-PE-P4-20B	LNE-JSB-PE-P4-20G	Φ 20	3/4"	24.3±0.5	100.0	50
LNE-JSB-PE-P4-25B	LNE-JSB-PE-P4-25G	Φ 25	1"	30.2±0.5	120.0	50
LNE-JSB-PE-P4-32B	LNE-JSB-PE-P4-32G	Φ 32	1 1/4"	37.6±0.5	150.0	25
LNE-JSB-PE-P4-38B	LNE-JSB-PE-P4-38G	Φ 38	1 1/2"	44.5±0.5	180.0	25
LNE-JSB-PE-P4-51B	LNE-JSB-PE-P4-51G	Φ 51	2"	55.8±0.5	220.0	20
LNE-JSB-PE-P4-64B	LNE-JSB-PE-P4-64G	Φ 64	2 1/2"	70.8±2.0	310.0	20
LNE-JSB-PE-P4-75B	LNE-JSB-PE-P4-75G	Φ 75	3"	84.8±2.0	350.0	20
LNE-JSB-PE-P4-100B	LNE-JSB-PE-P4-100G	Φ 100	4"	109.6±2.0	410.0	10
LNE-JSB-PE-P4-125B	LNE-JSB-PE-P4-125G	Φ 125	5"	137.3±2.0	460.0	5
LNE-JSB-PE-P4-150B	LNE-JSB-PE-P4-150G	Φ 150	6"	162±2.0	500.0	5

LNE-JSBH-PE 201不锈钢PE包塑金属软管

201 Stainless Steel Corrugated PE
Coated Flexible Conduit

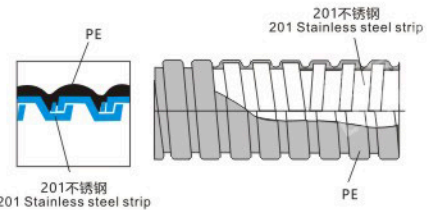

技术参数

产品材质	(内层) 采用201不锈钢带制成, (外层) 采用PE原料 (低烟无卤)。
工作温度	-10°C至+80°C, 短时可达+100°C, 可定制抗高温耐低温产品。
产品认证	无卤认证、低烟认证、RoHS、CE认证、V0级阻燃认证 (可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性、抗拉性。 2、表面采用PE材料低烟无卤、环保安全, 内部采用201不锈钢带耐腐蚀。 3、结构为反扣型, 增加抗拉强度、不容易折断或变形。 4、弯曲性能好, 内部平滑构造, 在穿引电线电缆时极容易。



Technical Parameters

Product material	(inner layer) adopting 201 stainless steel strip, (outer layer) adopting PE raw material (low smoke zero halogen).
Working temperature	-10°C~+80°C, instantaneously can be +100°C, can be customized high temperature and low temperature resistant products.
Certification	VDE, RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black,Grey
Working temperature	1.excellent waterproof,insulation and tensile strength. 2.PE surface, low smoke zero halogen and safe, inner layer adopting 201 stainless steel strip with corrosion resistance. 3.Square locked structure increase the tensile strength, not easily broken or deformed. 4.Super soft and excellent bending performance, internal smooth structure is very easy for the entry of wire and cable.

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSBH-PE-201-6B	LNE-JSBH-PE-201-6G	Φ 6	3/16"	8.8±0.25	40.0	200
LNE-JSBH-PE-201-8B	LNE-JSBH-PE-201-8G	Φ 8	1/4"	11.3±0.40	45.0	100
LNE-JSBH-PE-201-10B	LNE-JSBH-PE-201-10G	Φ 10	5/16"	14.1±0.40	55.0	100
LNE-JSBH-PE-201-13B	LNE-JSBH-PE-201-13G	Φ 13	3/8"	16.4±0.50	65.0	100
LNE-JSBH-PE-201-16B	LNE-JSBH-PE-201-16G	Φ 16	1/2"	20.2±0.50	85.0	100
LNE-JSBH-PE-201-20B	LNE-JSBH-PE-201-20G	Φ 20	3/4"	24.2±0.50	100.0	50
LNE-JSBH-PE-201-25B	LNE-JSBH-PE-201-25G	Φ 25	1"	29.4±0.60	120.0	50
LNE-JSBH-PE-201-32B	LNE-JSBH-PE-201-32G	Φ 32	1 1/4"	37.7±0.70	150.0	25
LNE-JSBH-PE-201-38B	LNE-JSBH-PE-201-38G	Φ 38	1 1/2"	44.5±0.80	180.0	25
LNE-JSBH-PE-201-51B	LNE-JSBH-PE-201-51G	Φ 51	2"	58.2±1.00	220.0	20
LNE-JSBH-PE-201-64B	LNE-JSBH-PE-201-64G	Φ 64	2 1/2"	71.8±1.50	310.0	20
LNE-JSBH-PE-201-75B	LNE-JSBH-PE-201-75G	Φ 75	3"	85.6±2.00	350.0	20
LNE-JSBH-PE-201-100B	LNE-JSBH-PE-201-100G	Φ 100	4"	110.6±2.50	410.0	10
LNE-JSBH-PE-201-125B	LNE-JSBH-PE-201-125G	Φ 125	5"	139.7±3.00	460.0	5
LNE-JSBH-PE-201-150B	LNE-JSBH-PE-201-150G	Φ 150	6"	163.4±3.00	500.0	5

304 Stainless Steel Corrugated PE
Coated Flexible Conduit

LNE-JSBH-PE 304不锈钢PE包塑金属软管




技术参数

产品材质	(内层) 采用304不锈钢带制成, (外层) 采用PE原料 (低烟无卤)。
工作温度	-10°C至+80°C, 短时可达+100°C, 可定制抗高温耐低温产品。
产品认证	无卤认证、低烟认证、RoHS、CE认证、V0级阻燃认证 (可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性、抗拉性。 2、表面采用PE材料低烟无卤、环保安全, 内部采用304不锈钢带耐腐蚀。 3、结构为反扣型, 增加抗拉强度、不容易折断或变形。 4、弯曲性能好, 内部平滑构造, 在穿引电线电缆时极容易。

Technical Parameters



Product material	(inner layer) adopting 304 stainless steel strip, (outer layer) adopting PE raw material (low smoke zero halogen).
Working temperature	-10°C~+80°C, instantaneously can be +100°C, can be customized high temperature and low temperature resistant products.
Certification	VDE, RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black,Grey
Working temperature	1.excellent waterproof,insulation and tensile strength. 2. PE surface, low smoke zero halogen and safe, inner layer adopting 304 stainless steel strip with corrosion resistance. 3.Square locked structure increase the tensile strength, not easily broken or deformed. 4.Super soft and excellent bending performance, internal smooth structure is very easy for the entry of wire and cable.

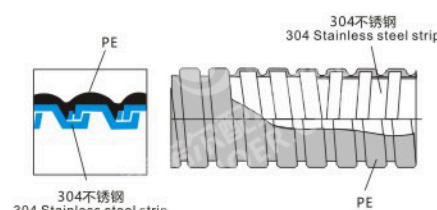

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSBH-PE-304-6B	LNE-JSBH-PE-304-6G	Φ 6	3/16"	8.8±0.25	40.0	200
LNE-JSBH-PE-304-8B	LNE-JSBH-PE-304-8G	Φ 8	1/4"	11.3±0.40	45.0	100
LNE-JSBH-PE-304-10B	LNE-JSBH-PE-304-10G	Φ 10	5/16"	14.1±0.40	55.0	100
LNE-JSBH-PE-304-13B	LNE-JSBH-PE-304-13G	Φ 13	3/8"	16.4±0.50	65.0	100
LNE-JSBH-PE-304-16B	LNE-JSBH-PE-304-16G	Φ 16	1/2"	20.2±0.50	85.0	100
LNE-JSBH-PE-304-20B	LNE-JSBH-PE-304-20G	Φ 20	3/4"	24.2±0.50	100.0	50
LNE-JSBH-PE-304-25B	LNE-JSBH-PE-304-25G	Φ 25	1"	29.4±0.60	120.0	50
LNE-JSBH-PE-304-32B	LNE-JSBH-PE-304-32G	Φ 32	1 1/4"	37.7±0.70	150.0	25
LNE-JSBH-PE-304-38B	LNE-JSBH-PE-304-38G	Φ 38	1 1/2"	44.5±0.80	180.0	25
LNE-JSBH-PE-304-51B	LNE-JSBH-PE-304-51G	Φ 51	2"	58.2±1.00	220.0	20
LNE-JSBH-PE-304-64B	LNE-JSBH-PE-304-64G	Φ 64	2 1/2"	71.8±1.50	310.0	20
LNE-JSBH-PE-304-75B	LNE-JSBH-PE-304-75G	Φ 75	3"	85.6±2.00	350.0	20
LNE-JSBH-PE-304-100B	LNE-JSBH-PE-304-100G	Φ 100	4"	110.6±2.50	410.0	10
LNE-JSBH-PE-304-125B	LNE-JSBH-PE-304-125G	Φ 125	5"	139.7±3.00	460.0	5
LNE-JSBH-PE-304-150B	LNE-JSBH-PE-304-150G	Φ 150	6"	163.4±3.00	500.0	5

LNE-JSBH-PE 316不锈钢PE包塑金属软管

316 Stainless Steel Corrugated PE
Coated Flexible Conduit

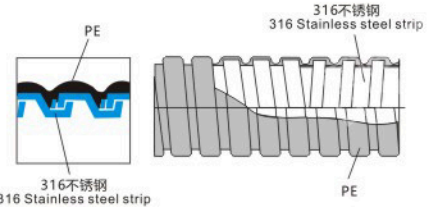

技术参数

产品材质	(内层) 采用316不锈钢带制成, (外层) 采用PE原料(低烟无卤)。
工作温度	-10°C至+80°C, 短时可达+100°C, 可定制抗高温耐低温产品。
产品认证	无卤认证、低烟认证、RoHS、CE认证、V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性、抗拉性。 2、表面采用PE材料低烟无卤、环保安全, 内部采用316不锈钢带耐腐蚀。 3、结构为反扣型, 增加抗拉强度、不容易折断或变形。 4、弯曲性能好, 内部平滑构造, 在穿引电线电缆时极容易。



Technical Parameters

Product material	(inner layer) adopting 316 stainless steel strip, (outer layer) adopting PE raw material (low smoke zero halogen).
Working temperature	-10°C~+80°C, instantaneously can be +100°C, can be customized high temperature and low temperature resistant products.
Certification	VDE, RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black,Grey
Working temperature	1.excellent waterproof ,insulation and tensile strength. 2. PE surface, low smoke zero halogen and safe, inner layer adopting 316 stainless steel strip with corrosion resistance. 3.Square locked structure increase the tensile strength, not easily broken or deformed. 4.Super soft and excellent bending performance, internal smooth structure is very easy for the entry of wire and cable.

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSBH-PE-316-6B	LNE-JSBH-PE-316-6G	Φ 6	3/16"	8.8±0.25	40.0	200
LNE-JSBH-PE-316-8B	LNE-JSBH-PE-316-8G	Φ 8	1/4"	11.3±0.40	45.0	100
LNE-JSBH-PE-316-10B	LNE-JSBH-PE-316-10G	Φ 10	5/16"	14.1±0.40	55.0	100
LNE-JSBH-PE-316-13B	LNE-JSBH-PE-316-13G	Φ 13	3/8"	16.4±0.50	65.0	100
LNE-JSBH-PE-316-16B	LNE-JSBH-PE-316-16G	Φ 16	1/2"	20.2±0.50	85.0	100
LNE-JSBH-PE-316-20B	LNE-JSBH-PE-316-20G	Φ 20	3/4"	24.2±0.50	100.0	50
LNE-JSBH-PE-316-25B	LNE-JSBH-PE-316-25G	Φ 25	1"	29.4±0.60	120.0	50
LNE-JSBH-PE-316-32B	LNE-JSBH-PE-316-32G	Φ 32	1 1/4"	37.7±0.70	150.0	25
LNE-JSBH-PE-316-38B	LNE-JSBH-PE-316-38G	Φ 38	1 1/2"	44.5±0.80	180.0	25
LNE-JSBH-PE-316-51B	LNE-JSBH-PE-316-51G	Φ 51	2"	58.2±1.00	220.0	20
LNE-JSBH-PE-316-64B	LNE-JSBH-PE-316-64G	Φ 64	2 1/2"	71.8±1.50	310.0	20
LNE-JSBH-PE-316-75B	LNE-JSBH-PE-316-75G	Φ 75	3"	85.6±2.00	350.0	20
LNE-JSBH-PE-316-100B	LNE-JSBH-PE-316-100G	Φ 100	4"	110.6±2.50	410.0	10
LNE-JSBH-PE-316-125B	LNE-JSBH-PE-316-125G	Φ 125	5"	139.7±3.00	460.0	5
LNE-JSBH-PE-316-150B	LNE-JSBH-PE-316-150G	Φ 150	6"	163.4±3.00	500.0	5

304 Stainless Steel P4 Interlocked
Corrugated PE Coated Metal Conduit

LNE-JSBH-PE-P4 304不锈钢双扣PE包塑金属软管




技术参数

产品材质	(内层) 采用304不锈钢带制成, (外层) 采用PE原料(低烟无卤)。
工作温度	-10°C至+80°C, 短时可达+100°C, 可定制抗高温耐低温产品。
产品认证	无卤认证、低烟认证、RoHS、CE认证、V0级阻燃认证(可定制)。
产品颜色	黑色、灰色
产品特性	1.软管具有防水、绝缘性、抗拉性。 2.表面采用PE材料低烟无卤、环保安全, 内部采用304不锈钢带耐腐蚀。 3.双扣结构, 有很强的抗拉性, 不容易折断或变形。 4.内部平滑构造在穿引电线电缆时极容易。

Technical Parameters

Product material	(inner layer) adopting 304 stainless steel strip, (outer layer) adopting PE raw material (low smoke zero halogen).
Working temperature	-10°C~+80°C, instantaneously can be +100°C, can be customized high temperature and low.
Certification	VDE, RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black,Grey
Working temperature	1. Excellent waterproof, insulation and tensile strength. 2. PE surface, low smoke zero halogen and safe, inner layer adopting 304 stainless steel strip with corrosion resistance. 3. Double locked structure, strong tensile, not easily broken or deformed. 4. Internal smooth structure is very easy for the entry of wire and cable.

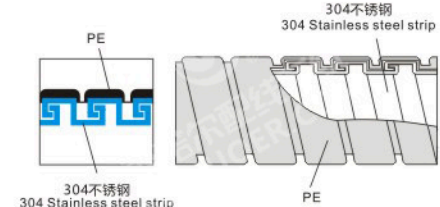

订货号*黑色 Order No. Black	订货号*灰色 Order No. Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSBH-PE-P4-10B	LNE-JSBH-PE-P4-10G	Φ 10	5/16"	13.8±0.5	55.0	100
LNE-JSBH-PE-P4-13B	LNE-JSBH-PE-P4-13G	Φ 13	3/8"	15.9±0.5	65.0	100
LNE-JSBH-PE-P4-16B	LNE-JSBH-PE-P4-16G	Φ 16	1/2"	19.4±0.5	85.0	100
LNE-JSBH-PE-P4-20B	LNE-JSBH-PE-P4-20G	Φ 20	3/4"	24.3±0.5	100.0	50
LNE-JSBH-PE-P4-25B	LNE-JSBH-PE-P4-25G	Φ 25	1"	30.2±0.5	120.0	50
LNE-JSBH-PE-P4-32B	LNE-JSBH-PE-P4-32G	Φ 32	1 1/4"	37.6±0.5	150.0	25
LNE-JSBH-PE-P4-38B	LNE-JSBH-PE-P4-38G	Φ 38	1 1/2"	44.5±0.5	180.0	25
LNE-JSBH-PE-P4-51B	LNE-JSBH-PE-P4-51G	Φ 51	2"	55.8±0.5	220.0	20
LNE-JSBH-PE-P4-64B	LNE-JSBH-PE-P4-64G	Φ 64	2 1/2"	70.8±2.0	310.0	20
LNE-JSBH-PE-P4-75B	LNE-JSBH-PE-P4-75G	Φ 75	3"	84.8±2.0	350.0	20
LNE-JSBH-PE-P4-100B	LNE-JSBH-PE-P4-100G	Φ 100	4"	109.6±2.0	410.0	10
LNE-JSBH-PE-P4-125B	LNE-JSBH-PE-P4-125G	Φ 125	5"	137.3±2.0	460.0	5
LNE-JSBH-PE-P4-150B	LNE-JSBH-PE-P4-150G	Φ 150	6"	162±2.0	500.0	5

LNE-JSP-PE PE平包塑金属软管

Liquid tight Smooth PE Coated Metal Conduit




技术参数

产品材质	(内层) 采用镀锌钢带及特殊防腐处理; (外层) 采用PE原料 (低烟无卤)。
工作温度	-10℃至+80℃, 短时可达+100℃, 可定制抗高温耐低温产品。
产品认证	无卤认证、低烟认证、RoHS、CE认证、V0级阻燃认证 (可定制)。
产品颜色	黑色、灰色
产品特性	1、软管具有防水、绝缘性、抗拉性。 2、表面采用PE材料低烟无卤、环保安全。内部采用热镀锌钢带 3、结构为反扣型, 增加抗拉强度、不容易折断或变形。 4、弯曲性能好, 内部平滑构造, 在穿引电线电缆时极容易。



Technical Parameters

Product material	(inner layer) adopting hot-dipped galvanized steel band with special anticorrosion treatment.(outer layer) adopting PE raw material (low smoke zero halogen).
Working temperature	-10℃~ +80℃, instantaneously can be +100℃, can be customized high temperature and low temperature resistant products.
Certification	VDE, RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black,Grey
Working temperature	1. excellent waterproof ,insulation and tensile strength. 2. PE surface, low smoke zero halogen and safe, inner layer adopting hot-dipped galvanized steel band with . 3. Square locked structure increase the tensile strength, not easily broken or deformed. 4. Super soft and excellent bending performance, internal smooth structure is very easy for the entry of wire and cable.

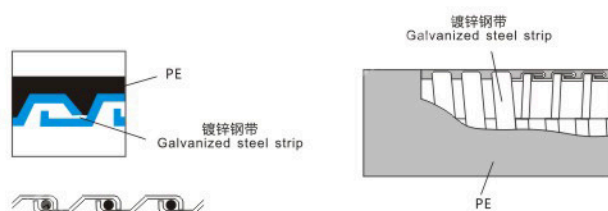

订货号*黑色 Order No. Black	订货号*灰色 Order No.Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSP-PE-10B	LNE-JSP-PE-10G	Φ 10	5/16"	15.0±0.5	55.0	100
LNE-JSP-PE-13B	LNE-JSP-PE-13G	Φ 13	3/8"	17.3±0.5	65.0	50
LNE-JSP-PE-16B	LNE-JSP-PE-16G	Φ 16	1/2"	20.8±0.5	85.0	50
LNE-JSP-PE-20B	LNE-JSP-PE-20G	Φ 20	3/4"	25.9±0.5	100.0	50
LNE-JSP-PE-25B	LNE-JSP-PE-25G	Φ 25	1"	31.9±0.5	120.0	50
LNE-JSP-PE-32B	LNE-JSP-PE-32G	Φ 32	1 1/4"	41.8±0.5	150.0	20
LNE-JSP-PE-38B	LNE-JSP-PE-38G	Φ 38	1 1/2"	47.0±0.5	180.0	20
LNE-JSP-PE-51B	LNE-JSP-PE-51G	Φ 51	2"	59.4±1.0	220.0	20
LNE-JSP-PE-64B	LNE-JSP-PE-64G	Φ 64	2 1/2"	71.7±1.0	310.0	10
LNE-JSP-PE-75B	LNE-JSP-PE-75G	Φ 75	3"	87.5±1.0	350.0	10
LNE-JSP-PE-100B	LNE-JSP-PE-100G	Φ 100	4"	112.5±2.0	410.0	5

304 Stainless Steel P4 Interlocked Liquid-tight Smooth PE Coated Metal Conduit

LNE-JSPH-PE-P4 304不锈钢双扣PE平包塑金属软管




技术参数

产品材质	(内层) 采用304不锈钢带制成, (外层) 采用PE原料 (低烟无卤)。
工作温度	-10℃至+80℃, 短时可达+100℃, 可定制抗高温耐低温产品。
产品认证	无卤认证、低烟认证、RoHS、CE认证、V0级阻燃认证 (可定制)。
产品颜色	黑色、灰色
产品特性	1.软管具有防水、绝缘性、抗拉性。 2.表面加厚层阻燃PE, 机械性能更强。 内部采用304不锈钢带耐腐蚀。 3.双扣结构, 有很强的抗拉性, 不容易折断或变形。 4.内部平滑构造在穿引电线电缆时极容易。

Technical Parameters

Product material	(inner layer) adopting 304 stainless steel strip, (outer layer) adopting PE raw material (low smoke zero halogen).
Working temperature	-10℃~+80℃, instantaneously can be +100℃, can be customized high temperature and low.
Certification	VDE, RoHS, CE, flame retardant certification: FV-0 (customized).
Color	Black,Grey
Property	1. Excellent waterproof, insulation and tensile strength. 2. PE surface thickened layer with flame retardant, stronger mechanical property, inner layer adopting 304 stainless steel strip with corrosion resistance. 3. Double locked structure, strong tensile, not easily broken or deformed. 4. Internal smooth structure is very easy for the entry of wire and cable.

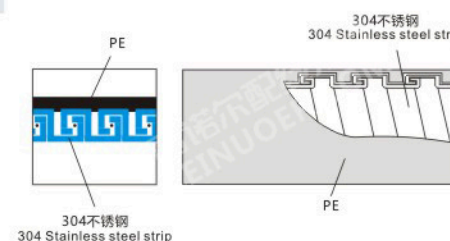

订货号*黑色 Order No. Black	订货号*灰色 Order No.Grey	公制规格 Metric	英制规格 G system	外径及允许偏差(mm) Outer Diameter and Tolerance	自然弯曲(mm) Natural Curve	包装单位(M) Packaging Unit
LNE-JSPH-PE-P4-10B	LNE-JSPH-PE-P4-10G	Φ 10	5/16"	14.8±0.6	55.0	100
LNE-JSPH-PE-P4-13B	LNE-JSPH-PE-P4-13G	Φ 13	3/8"	16.9±0.5	65.0	50
LNE-JSPH-PE-P4-16B	LNE-JSPH-PE-P4-16G	Φ 16	1/2"	20.1±0.5	85.0	50
LNE-JSPH-PE-P4-20B	LNE-JSPH-PE-P4-20G	Φ 20	3/4"	24.8±0.5	100.0	50
LNE-JSPH-PE-P4-25B	LNE-JSPH-PE-P4-25G	Φ 25	1"	31.8±0.6	120.0	50
LNE-JSPH-PE-P4-32B	LNE-JSPH-PE-P4-32G	Φ 32	1 1/4"	41.8±0.5	150.0	20
LNE-JSPH-PE-P4-38B	LNE-JSPH-PE-P4-38G	Φ 38	1 1/2"	47.0±0.5	180.0	20
LNE-JSPH-PE-P4-51B	LNE-JSPH-PE-P4-51G	Φ 51	2"	59.4±1.0	220.0	20
LNE-JSPH-PE-P4-64B	LNE-JSPH-PE-P4-64G	Φ 64	2 1/2"	71.7±1.0	310.0	10
LNE-JSPH-PE-P4-75B	LNE-JSPH-PE-P4-75G	Φ 75	3"	87.5±1.0	350.0	10
LNE-JSPH-PE-P4-100B	LNE-JSPH-PE-P4-100G	Φ 100	4"	112.5±2.0	410.0	5