

LNE-DPJ 锌合金端式接头

Zinc Alloy Straight Fitting




技术参数

产品材质	A,C,F部位采用优质加厚型锌合金制成, B,E部位采用丁腈橡胶制成, D部位为铁皮制成。
工作温度	-40°C至+100°C, 短时可达+120°C。
螺纹规格	公制(M)
产品特性	加厚型锌合金镀锌或镀铬、外型美观、结构紧密、强度高, 软管护套设计与软管相扣接紧之设计、装配省时便利, 抗拉力强, 可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂。

Technical Parameters

Product material	Location A, C and F are made of 304(316)stainless steel, B, E are made of chemigums ,and D is made of stainless steel.
Specification of thread	Metric
Temperature	-40°C ~ +100°C, instantaneously can be +120°C
Property	Thickened zinc alloy or chromium plated; nice looking, compact structure and high strength. Flexible conduit Ferrule design make conduit connection tightly, easy assembly ,and strong pull resistance. Water resistant, dust resistant, inactive with salts, acid and alkali resistance, alcohols,oils and greases as well as general solvent.

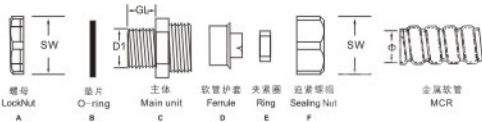

除以下标准规格外, 可按要求任意变动螺纹大小及标准。
 Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 Order No. No.	配套金属软管(公制) Matching metal Hose(M) Φ	配套金属软管(英寸) Matching metal Hose(in.) Φ	螺纹标准(公制) Thread standard(M) M	螺纹长度(mm) Thread Length GL	螺纹外径 (mm) Thread O.D D1	扳手尺寸(mm) Wrench SW	包装单位(只/包) Packaging Unit PCS
LNE-DPJ-6-M14	Φ6	3/16	M14×1.5	7	14	18	100
LNE-DPJ-8-M16	Φ8	5/16	M16×1.5	8	16	22	100
LNE-DPJ-10-M16	Φ10	1/4	M16×1.5	8	16	22	100
LNE-DPJ-13-M16	Φ13	3/8	M16×1.5	8	16	26	100
LNE-DPJ-13-M20	Φ13	3/8	M20×1.5	10	20	26	100
LNE-DPJ-16-M18	Φ16	1/2	M18×1.5	8	18	30	50
LNE-DPJ-16-M20	Φ16	1/2	M20×1.5	10	20	30	50
LNE-DPJ-16-M24	Φ16	1/2	M24×1.5	10	24	30	50
LNE-DPJ-20-M20	Φ20	3/4	M20×1.5	10	20	36	50
LNE-DPJ-20-M25	Φ20	3/4	M25×1.5	12	25	36	50
LNE-DPJ-20-M27	Φ20	3/4	M27×2.0	12	27	36	50
LNE-DPJ-20-M30	Φ20	3/4	M30×2.0	12	30	36	50
LNE-DPJ-25-M25	Φ25	1	M25×1.5	12	25	43	20
LNE-DPJ-25-M32	Φ25	1	M32×1.5	12	32	43	20
LNE-DPJ-25-M33	Φ25	1	M33×2.0	12	33	43	20
LNE-DPJ-25-M36	Φ25	1	M36×2.0	12	36	43	20
LNE-DPJ-32-M40	Φ32	1-1/4	M40×1.5	14	40	53	20
LNE-DPJ-32-M42	Φ32	1-1/4	M42×2.0	14	42	53	20
LNE-DPJ-32-M48	Φ32	1-1/4	M48×2.0	14	48	53	20
LNE-DPJ-38-M40	Φ38	1-1/2	M40×1.5	14	40	60	10
LNE-DPJ-38-M48	Φ38	1-1/2	M48×2.0	14	48	60	10
LNE-DPJ-38-M50	Φ38	1-1/2	M50×1.5	14	50	60	10
LNE-DPJ-51-M50	Φ51	2	M50×1.5	14	50	74	10
LNE-DPJ-51-M60	Φ51	2	M60×2.0	15	60	74	10
LNE-DPJ-51-M63	Φ51	2	M63×1.5	15	63	74	10
LNE-DPJ-64-M76	Φ64	2-1/2	M76×2.0	20	76	90	5
LNE-DPJ-75-M88	Φ75	3	M88×2.0	22	88	103	5
LNE-DPJ-100-M114	Φ100	4	M114×2.0	28	114	134	1
LNE-DPJ-125-M140	Φ125	5	M140×2.0	29	140	150	1
LNE-DPJ-150-M164	Φ150	6	M164×2.0	29	164	180	1

Zinc Alloy Straight Fitting

LNE-DPJ 锌合金端式接头




技术参数

产品材质	A,C,F部位采用优质加厚型锌合金制成, B,E部位采用丁腈橡胶制成, D部位为铁皮制成。
工作温度	-40°C至+100°C, 短时可达+120°C。
螺纹规格	德制(PG)、英制(G)、美制(NPT)
产品特性	加厚型锌合金镀锌或镀铬、外型美观、结构紧密、强度高, 软管护套设计与软管相扣接紧之设计、装配省时便利, 抗拉力强, 可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂。

Technical Parameters

Product material	Location A, C and F are made of 304(316)stainless steel, B, E are made of chemigums ,and D is made of stainless steel.
Specification of thread	PG, G,NPT
Temperature	-40°C ~ +100°C, instantaneously can be +120°C
Property	Thickened zinc alloy or chromium plated; nice looking, compact structure and high strength. Flexible conduit Ferrule design make conduit connection tightly, easy assembly ,and strong pull resistance. Water resistant, dust resistant, inactive with salts, acid and alkali resistance, alcohols,oils and greases as well as general solvent.




除以下标准规格外, 可按要求任意变动螺纹大小及标准。
 Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 Order No. No.	配套金属软管(公制) Matching metal Hose(M) Φ	配套金属软管(英寸) Matching metal Hose(in.) Φ	螺纹标准(德制) Thread standard(PG) PG	螺纹长度(mm) Thread Length GL	螺纹外径 (mm) Thread O.D D1	扳手尺寸(mm) Wrench SW	包装单位(只/包) Packaging Unit PCS
LNE-DPJ-6-PG7	Φ6	3/16	PG7	8	12.5	18	100
LNE-DPJ-8-PG9	Φ8	5/16	PG9	8	15.2	22	100
LNE-DPJ-10-PG9	Φ10	1/4	PG9	8	15.2	22	100
LNE-DPJ-13-PG11	Φ13	3/8	PG11	8	18.6	26	100
LNE-DPJ-13-PG13.5	Φ13	3/8	PG13.5	8	20.4	26	100
LNE-DPJ-16-PG13.5	Φ16	1/2	PG13.5	8	20.4	30	50
LNE-DPJ-16-PG16	Φ16	1/2	PG16	11	22.5	30	50
LNE-DPJ-20-PG21	Φ20	3/4	PG21	14	28.3	36	50
LNE-DPJ-25-PG29	Φ25	1	PG29	15	37	43	20
LNE-DPJ-32-PG29	Φ32	1-1/4	PG29	15	37	53	20
LNE-DPJ-38-PG36	Φ38	1-1/2	PG36	16	47	60	10
LNE-DPJ-38-PG42	Φ38	1-1/2	PG42	16	54	60	10
LNE-DPJ-51-PG48	Φ51	2	PG48	18	59.3	74	10

订货号 (英制) Order No.(G) No.	螺纹标准(英制) Thread standard(G) G	订货号 (美制) Order No.(NPT) No.	螺纹标准(美制) Thread standard(NPT) NPT	配套金属软管(公制) Matching metal Hose(M) Φ	配套金属软管(英寸) Matching metal Hose(in.) Φ	螺纹长度(mm) Thread Length GL	螺纹外径 (mm) Thread O.D D1	扳手尺寸(mm) Wrench SW	包装单位(只/包) Packaging Unit PCS
LNE-DPJ-6-G1/4	G1/4	LNE-DPJ-6-NPT1/4	NPT1/4	Φ6	3/16	8	13.2	18	100
LNE-DPJ-8-G1/4	G1/4	LNE-DPJ-8-NPT1/4	NPT1/4	Φ8	5/16	8	13.2	22	100
LNE-DPJ-10-G1/4	G1/4	LNE-DPJ-10-NPT1/4	NPT1/4	Φ10	1/4	8	13.2	22	100
LNE-DPJ-13-G3/8	G3/8	LNE-DPJ-13-NPT3/8	NPT3/8	Φ13	3/8	8	16.5	26	50
LNE-DPJ-16-G1/2	G1/2	LNE-DPJ-16-NPT1/2	NPT1/2	Φ16	1/2	11	21.3	30	50
LNE-DPJ-20-G3/4	G3/4	LNE-DPJ-20-NPT3/4	NPT3/4	Φ20	3/4	14	26.6	36	50
LNE-DPJ-25-G1	G1	LNE-DPJ-25-NPT1	NPT1	Φ25	1	15	33.4	43	20
LNE-DPJ-32-G1-1/4	G1-1/4	LNE-DPJ-32-NPT1-1/4	NPT1-1/4	Φ32	1-1/4	15	42.1	53	20
LNE-DPJ-38-G1-1/2	G1-1/2	LNE-DPJ-38-NPT1-1/2	NPT1-1/2	Φ38	1-1/2	16	47.8	60	10
LNE-DPJ-51-G2	G2	LNE-DPJ-51-NPT2	NPT2	Φ51	2	18	59.6	74	10
LNE-DPJ-64-G2-1/2	G2-1/2	LNE-DPJ-64-NPT2-1/2	NPT2-1/2	Φ64	2-1/2	22	75.1	90	5
LNE-DPJ-75-G3	G3	LNE-DPJ-75-NPT3	NPT3	Φ75	3	22	87.8	103	5
LNE-DPJ-100-G4	G4	LNE-DPJ-100-NPT4	NPT4	Φ100	4	24	113	134	1
LNE-DPJ-125-G5	G5	LNE-DPJ-125-NPT5	NPT5	Φ125	5	25	136	160	1
LNE-DPJ-150-G6	G6	LNE-DPJ-150-NPT6	NPT6	Φ150	6	35	160	195	1

LNE-DPN 锌合金内牙式接头

Zinc Alloy Female Thread Straight Fitting

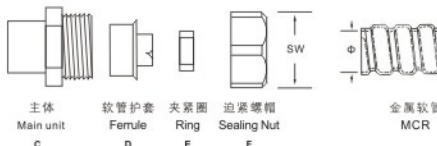

技术参数	
产品材质	C,F部位采用优质加厚型锌合金制成, E部位采用丁腈橡胶制成, D部位为铁皮压铸制成。
工作温度	-40°C至+100°C, 短时可达+120°C。
螺纹规格	英制(G)【公制螺纹可定制】
产品特性	内螺纹型用于接带螺纹钢管或配有螺纹的连接件均可。

Technical Parameters	
Product material	Location C and F are made of thickened zinc alloy; E are made of chemigums , and D is of iron casting.
Specification of thread	G(metric thread can be customized).
Temperature	-40°C ~ +100°C, instantaneously can be +120°C
Property	Female thread type is suitable for connection, with threaded steel conduit or external thread connection.

除以下标准规格外, 可按要求任意变动螺纹大小及标准。
 Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.



订货号 Order No. No.	配套金属软管(公制) Matching metal Hose(M) Φ	配套金属软管(英制) Matching metal Hose(G) Φ	螺纹标准(英制) Thread standard(G) G	扳手尺寸(mm) Wrench SW	包装单位(只/包) Packaging Unit PCS
LNE-DPN-13	Φ 12(13)	3/8"	G3/8"	26	100
LNE-DPN-16	Φ 15 (16)	1/2"	G1/2"	30	50
LNE-DPN-20	Φ 20 (19)	3/4"	G3/4"	36	50
LNE-DPN-25	Φ 25	1"	G1"	43	20
LNE-DPN-32	Φ 32	1 1/4"	G1 1/4"	53	20
LNE-DPN-38	Φ 38 (40)	1 1/2"	G1 1/2"	60	10
LNE-DPN-51	Φ 51 (50)	2"	G2"	74	10
LNE-DPN-64	Φ 64 (70)	2 1/2"	G2 1/2"	90	5
LNE-DPN-75	Φ 75 (80)	3"	G3"	103	5
LNE-DPN-100	Φ 100	4"	G4"	134	1
LNE-DPN-125	Φ 125	5"	G5"	160	1
LNE-DPN-150	Φ 150	6"	G6"	195	1

Zinc Alloy Sleeve Type Fitting

LNE-DKJ 锌合金卡套式接头

技术参数	
产品材质	C,F部位采用优质加厚型锌合金制成, E部位采用丁腈橡胶制成, D部位为铁皮压铸制成。
工作温度	-40°C至+100°C, 短时可达+120°C。
产品特性	1.加厚型锌合金镀锌或镀铬、外型美观、结构紧密、强度高、 2.软管护套设计与软管相扣接紧之设计、装配省时便利, 抗拉力强, 3.可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂。

Technical Parameters	
Product material	Location C and F are made of high quality thickened zinc alloy; B and E are made of chemigums ,and D is made of galvanized iron.
Temperature	-40°C ~ +100°C, instantaneously can be +120°C
Property	1. Thickened zinc alloy or chromium plated; nice looking, compact structure and high strength. 2. Ferrule design make conduit connection tightly, easy assembly,and strong pull resistance. 3. Water resistant, dust resistant, inactive with salts, acid and alkali resistance, alcohols, oils and greases as well as general solvent.

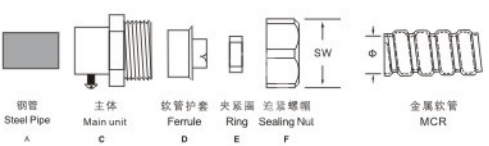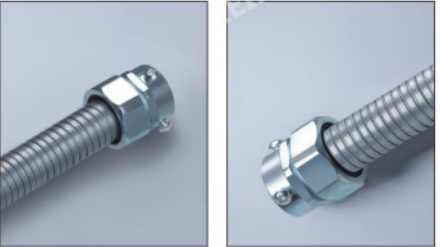

除以下标准规格外, 可按要求任意变动螺纹大小及标准。
 Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 Order No.	配套金属软管(公制) Matching metal Hose(M) Φ	螺牙厚钢管 Threaded Thick Steel Conduit		薄钢管 Thin Steel Conduit		扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
		公制 M	外径X壁厚 (mm) Outer Diameter x Wall Thickness	公制 M	外径X壁厚 (mm) Outer Diameter x Wall Thickness		
No.	Φ	M	OxW	M	OxW	SW	PCS
LEN-DKJ-10	Φ10	#10		#12	12.76 × 1.60	22	100
LEN-DKJ-12	Φ12(13)	#12	17.00 × 2.25	#15	15.87 × 1.60	26	100
LEN-DKJ-16	Φ15(16)	#15	21.25 × 2.75	#20	19.05 × 1.80	30	50
LEN-DKJ-20	Φ20(19)	#20	26.75 × 2.75	#25	25.40 × 1.80	36	50
LEN-DKJ-25	Φ25	#25	33.50 × 3.25	#32	31.75 × 1.80	43	20
LEN-DKJ-32	Φ32	#32	42.25 × 3.25	#40	38.10 × 1.80	53	20
LEN-DKJ-38	Φ38(40)	#40	48.00 × 3.50	#50	50.80 × 2.00	60	10
LEN-DKJ-51	Φ51(50)	#50	60.00 × 3.50	#70	63.50 × 2.50	74	10
LEN-DKJ-64	Φ64(70)	#70	75.50 × 3.75	#80	76.20 × 3.20	90	5
LEN-DKJ-75	Φ75(80)	#80	88.50 × 4.00			103	5
LEN-DKJ-100	Φ100	#100	114.00 × 4.00			134	1
LEN-DKJ-125	Φ125	#125	140.00 × 4.50			160	1
LEN-DKJ-150	Φ150	#150	165.00 × 4.50			195	1

LNE-DGJ 锌合金卡簧自固式接头

Zinc Alloy Circlip Self Secured Fitting




技术参数

产品材质	B,D,G部位采用优质加厚型锌合金制成, C,F部位采用丁腈橡胶制成, E部位为铁皮压铸制成。
工作温度	-40℃至+100℃, 短时可达+120℃。
产品特性	1.加厚型锌合金镀锌或镀铬、外型美观、结构紧密、强度高, 2.软管护套设计与软管相扣接紧之设计、装配省时便利, 抗拉力强, 3.可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂。

Technical Parameters

Product material	Location B,D,G are made of high quality thickened zinc alloy; C,F are made of chemigums ,and is made of iron sheet.
Temperature	-40℃ ~ +100℃, instantaneously can be +120℃
Property	1. Thickened zinc alloy or chromium plated; nice looking, compact structure and high strength. 2. Ferrule design make conduit connection tightly, easy assembly, and strong pull resistance. 3. Water resistant, dust resistant, inactive with salts, acid and alkali resistance, alcohols, oils and greases as well as general solvent.

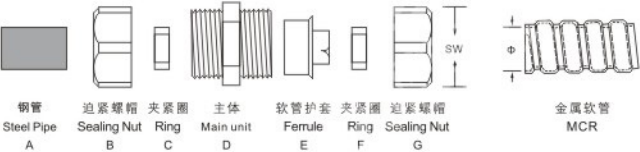

除以下标准规格外, 可按要求任意变动螺纹大小及标准。
 Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 Order No.	配套金属软管(公制) Matching metal Hose(M)	螺牙厚钢管 Threaded Thick Steel Conduit	薄钢管 Thin Steel Conduit	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	Φ	公制 M 外径X壁厚 (mm) Outer Diameter x Wall Thickness	公制 M 外径X壁厚 (mm) Outer Diameter x Wall Thickness		PCS
LNE-DGJ-10	Φ10	#10	#12	22	100
LNE-DGJ-12	Φ12(13)	#12	#15	26	100
LNE-DGJ-16	Φ15(16)	#15	#20	30	50
LNE-DGJ-20	Φ20(19)	#20	#25	36	20
LNE-DGJ-25	Φ25	#25	#32	43	20
LNE-DGJ-32	Φ32	#32	#40	53	10
LNE-DGJ-38	Φ38(40)	#40	#50	60	10
LNE-DGJ-51	Φ51(50)	#50	#70	74	10
LNE-DGJ-64	Φ64(70)	#70	#80	90	5
LNE-DGJ-75	Φ75(80)	#80		103	5
LNE-DGJ-100	Φ100	#100		134	1
LNE-DGJ-125	Φ125	#125		160	1
LNE-DGJ-150	Φ150	#150		195	1

Zinc Alloy 90-Degree Angle Elbow Fitting


LNE-DWJ 锌合金90度弯接头

技术参数

产品材质	A,C,F部位采用优质加厚型锌合金制成, D部位为铁皮压铸制成。
螺纹规格	英制(G)
工作温度	-40℃至+100℃, 短时可达+120℃。
产品特性	接合后和箱体成90度, 加厚型锌合金,外型美观、结构紧密、强度高。

Technical Parameters

Product material	A, C, F parts are made of high quality thickened zinc alloy. D is made of iron casting.
Specification of thread	G
Temperature	-40℃ ~ +100℃, instantaneously can be +120℃
Property	90 degrees after connected with box , thickened zinc alloy, nice looking, compact structure, high strength.

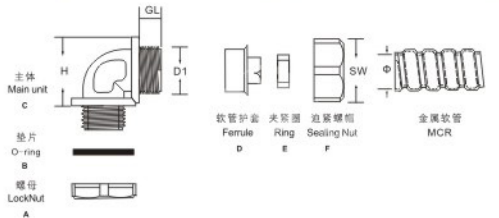

除以下标准规格外, 可按要求任意变动螺纹大小及标准。
 Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 (英制) Order No.(G)	螺纹标准 (英制) Thread Standard(G)	配套金属软管 (公制) Metal Flexibe Conduit(M)	主体长度(mm) Main Unit Length	螺纹长度(mm) Thhead Length	螺纹外径(mm) Thread O.D	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	G	Φ	H	GL	D1	SW	PCS
LNE-DWJ90-13-G3/8	G3/8	Φ13	32	8	16.5	26	50
LNE-DWJ90-16-G1/2	G1/2	Φ16	36	11	21.3	30	50
LNE-DWJ90-20-G3/4	G3/4	Φ20	45	14	26.6	36	50
LNE-DWJ90-25-G1	G1	Φ25	52	15	33.4	43	20
LNE-DWJ90-32-G1-1/4	G1-1/4	Φ32	60	15	42.1	53	20
LNE-DWJ90-38-G1-1/2	G1-1/2	Φ38	68	16	47.8	60	10
LNE-DWJ90-51-G2	G2	Φ51	80	18	59.6	74	10
LNE-DWJ90-64-G2-1/2	G2-1/2	Φ64	110	22	75.1	90	5
LNE-DWJ90-75-G3	G3	Φ75		22	87.8	103	5
LNE-DWJ90-100-G4	G4	Φ100		24	113	134	1

LNE-DWJ 锌合金45度弯接头

Zinc Alloy 45-Degree Angle Elbow Fitting





技术参数

产品材质	A,C,F部位采用优质加厚型锌合金制成，D部位为铁皮压铸制成。
螺纹规格	英制(G)
工作温度	-40℃至+100℃，短时可达+120℃。
产品特性	接合后和箱体成45度，加厚型锌合金,外型美观、结构紧密、强度高。

Technical Parameters

Product material	A, C, F parts are made of high quality thickened zinc alloy. D is made of iron casting.
Specification of thread	G
Temperature	-40℃ ~ +100℃, instantaneously can be +120℃
Property	45 degrees after connected with box , thickened zinc alloy, nice looking, compact structure, high strength.

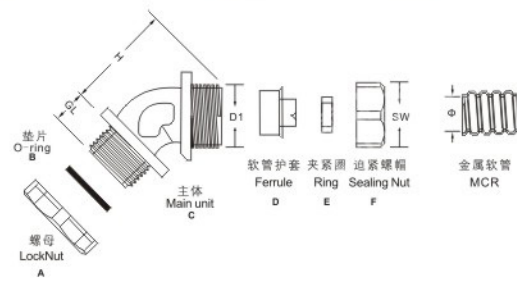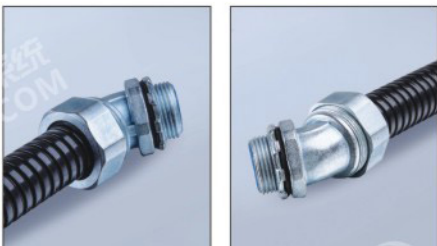

除以下标准规格外，可按要求任意变动螺纹大小及标准。
 Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 (英制) Order No.(G)	螺纹标准 (英制) Thread Standard(G)	配套金属软管 (公制) Metal Flexibe Conduit(M)	主体长度(mm) Main Unit Length	螺纹长度(mm) Thread Length	螺纹外径(mm) Thread O.D	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	G	Φ	H	GL	D1	SW	PCS
LNE-DWJ45-13-G3/8	G3/8	Φ13	33	8	16.5	26	50
LNE-DWJ45-16-G1/2	G1/2	Φ16	36	11	21.3	30	50
LNE-DWJ45-20-G3/4	G3/4	Φ20	41	14	26.6	36	25
LNE-DWJ45-25-G1	G1	Φ25	52	15	33.4	43	20
LNE-DWJ45-32-G1-1/4	G1-1/4	Φ32	62	15	42.1	53	10
LNE-DWJ45-38-G1-1/2	G1-1/2	Φ38	68	16	47.8	60	10
LNE-DWJ45-51-G2	G2	Φ51	80	18	59.6	74	5
LNE-DWJ45-64-G2-1/2	G2-1/2	Φ64	115	22	75.1	90	5
LNE-DWJ45-75-G3	G3	Φ75		22	87.8	103	1
LNE-DWJ45-100-G4	G4	Φ100		24	113	134	1

Zinc Alloy Y-shaped Fitting



LNE-Y-Z 锌合金Y型三通接头

技术参数

产品材质	A,C,F采用优质加厚型锌合金制成，E部位采用丁腈橡胶制成，D部位为铁皮制成。
工作温度	-40℃至+100℃，短时可达+120℃。
产品特性	加厚型锌合金镀锌或镀铬、外型美观、结构紧密、强度高，软管护套设计与软管相扣接紧之设计、装配省时便利，抗拉力强，可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂。

Technical Parameters

Product material	Location A,C,F are made of high-quality thickened zinc alloy, E are made of chemigums, D is made of iron sheet.
Temperature	-40℃ ~ +100℃, instantaneously can be +120℃
Property	Thickened zinc alloy or chromium plated; nice looking, compact structure and high strength. Flexible conduit Ferrule design make conduit connection tightly, easy assembly ,and strong pull resistance. Water resistant, dust resistant, inactive with salts, acid and alkali resistance, alcohols, oils and greases as well as general solvent.

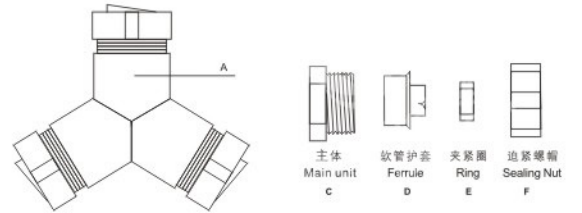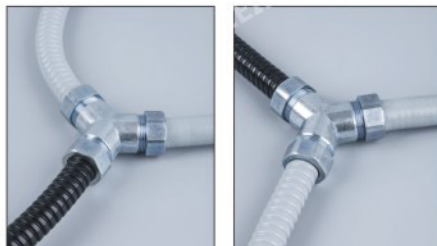

除以下标准规格外，可按要求任意变动螺纹大小及标准。
 Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 Order No.	配套软管 Matching Conduit
LNE-Y-Z-13/13/13	13/13/13
LNE-Y-Z-13/13/16	13/13/16
LNE-Y-Z-16/16/16	16/16/16
LNE-Y-Z-16/16/13	16/16/13
LNE-Y-Z-20/20/20	20/20/20
LNE-Y-Z-20/13/13	20/13/13
LNE-Y-Z-20/16/13	20/16/13
LNE-Y-Z-20/20/13	20/20/13
LNE-Y-Z-20/20/16	20/20/16
LNE-Y-Z-25/25/25	25/25/25
LNE-Y-Z-25/20/16	25/20/16
LNE-Y-Z-25/20/13	25/20/13

订货号 Order No.	配套软管 Matching Conduit
LNE-Y-Z-25/16/16	25/16/16
LNE-Y-Z-25/20/20	25/20/20
LNE-Y-Z-25/25/13	25/25/13
LNE-Y-Z-25/25/20	25/25/20
LNE-Y-Z-32/32/32	32/32/32
LNE-Y-Z-32/25/13	32/25/13
LNE-Y-Z-32/32/25	32/32/25
LNE-Y-Z-32/25/25	32/25/25
LNE-Y-Z-32/32/20	32/32/20
LNE-Y-Z-32/32/16	32/32/16
LNE-Y-Z-32/32/13	32/32/13

LNE-T-Z 锌合金T型三通接头

Zinc Alloy T-shaped Fitting





技术参数

产品材质	A,C,F采用优质加厚型锌合金制成, E部位采用丁腈橡胶制成, D部位为铁皮制成。
工作温度	-40°C至+100°C, 短时可达+120°C。
产品特性	加厚型锌合金镀锌或镀铬、外型美观、结构紧密、强度高, 软管护套设计与软管相扣接紧之设计、装配省时便利, 抗拉力强, 可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂。

Technical Parameters

Product material	Location A, C, F are made of high-quality thickened zinc alloy, E are made of chemigums, D is made of iron sheet.
Temperature	-40°C ~ +100°C, instantaneously can be +120°C
Property	Thickened zinc alloy or chromium plated; nice looking, compact structure and high strength. Flexible conduit Ferrule design make conduit connection tightly, easy assembly ,and strong pull resistance. Water resistant, dust resistant, inactive with salts, acid and alkali resistance, alcohols, oils and greases as well as general solvent.

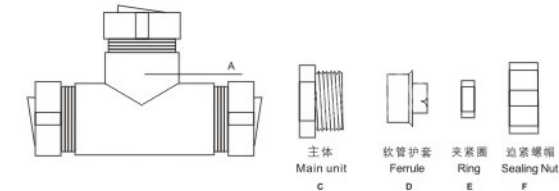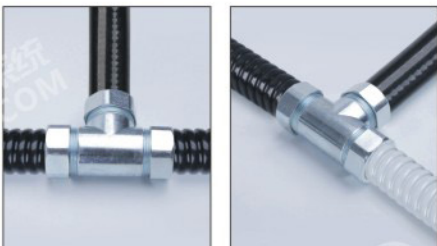

除以下标准规格外, 可按要求任意变动螺纹大小及标准。
Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 Order No.	配套软管 Matching Conduit	包装单位(只/包) Packaging Unit(PCS)
LNE-T-Z-3*16	16/16/16	25
LNE-T-Z-3*20	20/20/20	25
LNE-T-Z-3*25	25/25/25	25

Zinc Alloy Double Locked Fitting


LNE-DPJD 锌合金双锁紧金属软管接头

技术参数

产品材质	A,C,F,H部位采用优质锌合金镀镍, B,E,G部位采用丁腈橡胶制成, D部分采用尼龙PA66制成。
螺纹规格	公制(M)、德制(PG)、英制(G)及美制(NPT)。
产品颜色	A,C,F,H部位为金属色, B,E,G为黑色, D为白色。
工作温度	-40°C至+100°C, 短时可达+120°C。
产品特性	塑料软管接头配套锁式电缆接头为一体, 防电线松动, 装卸只需拔插无需工具, 大大缩减了安装时间, 夹紧电缆范围大, 抗拉力特强, 产品有耐酸碱、耐化学物质与一般溶剂等抗腐蚀性, 可防水、防尘全方位的尺寸可广泛应用于各个领域的出线孔上。

Technical Parameters

Product material	,C,F,H parts are zinc-nickel alloy ,B, E and G are Chemigum material,Part D is UL approved Nylon Pa66
Specification of thread	Metric,PG,G,NPT
Color	A,C,F,H parts are metallic,B,E,G are black, D is white.
Temperature	-40°C ~ +100°C, instantaneously can be +120°C
Property	Cable Glands plus conduit connector as whole one, anti-loose for cable, Assembly and discharging work easy by just plugging without tools, greatly reducing the installation time.it can fit with wide range of fastening cable, feature with high tensile strength,acid and alkali resistant,corrosion resistant to generally chemicals and solvents, waterproof, dustproof, widely applied with various types of outlet hole.

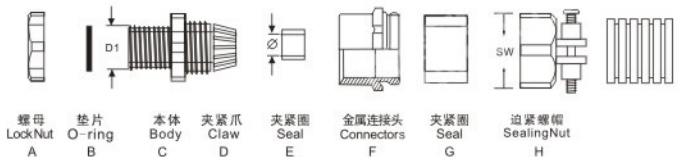

除以下标准规格外, 可按要求任意变动螺纹大小及标准。
Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 (英制) Order No.(G) No.	螺纹标准(英制) Thread standard(G) G	配套金属软管(公制) Matching metal Hose(M) Φ	配套金属软管(英寸) Matching metal Hose(in.) Φ	螺纹长度(mm) Thread Length GL	螺纹外径 (mm) Thread O.D D1	扳手尺寸(mm) Wrench SW	包装单位(只/包) Packaging Unit PCS
LNE-DPJD-10-G1/4	G1/4	Φ10	1/4	8	13.2	22	100
LNE-DPJD-13-G3/8	G3/8	Φ13	3/8	8	16.5	26	50
LNE-DPJD-16-G1/2	G1/2	Φ16	1/2	11	21.3	30	50
LNE-DPJD-20-G3/4	G3/4	Φ20	3/4	14	26.6	36	50
LNE-DPJD-25-G1	G1	Φ25	1	15	33.4	43	20
LNE-DPJD-32-G1-1/4	G1-1/4	Φ32	1-1/4	15	42.1	53	20
LNE-DPJD-38-G1-1/2	G1-1/2	Φ38	1-1/2	16	47.8	60	10
LNE-DPJD-51-G2	G2	Φ51	2	18	59.6	74	10
LNE-DPJD-64-G2-1/2	G2-1/2	Φ64	2-1/2	22	75.1	90	5

LNE-DWJD 锌合金双锁紧90度弯接头

Zinc Alloy 90-Degree Double Locked Fitting




技术参数

产品材质	A,C,F,I部位采用优质锌合金镀镍，D部位采用尼龙PA66制成，B,E,H采用丁腈橡胶,G为铁皮压铸制成。
螺纹规格	德制(PG)、英制(G)、美制(NPT)
工作温度	-40℃至+100℃，短时可达+120℃。
产品特性	1.外型美观、结构紧密、强度更高。 2.软管护套设计与软管相扣接紧之设计、配合近紧头装配省时便利，抗拉力强。 3.可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂。

Technical Parameters

Product material	A,C,F,I parts are zinc-nickel alloy .D part is Pa66, B,E,H parts are NBR,G is made of iron.
Specification of thread	PG,G,NPT
Temperature	-40℃ ~ +100℃, instantaneously can be +120℃
Property	Nice shape, compact structure, higher intensity; Flexible conduit Ferrule design make conduit connection tightly, easy assembly, and strong pull resistance. Water resistant, dust resistant, inactive with salts, acid and alkali resistance, alcohols, oils and greases as well as general solvent.

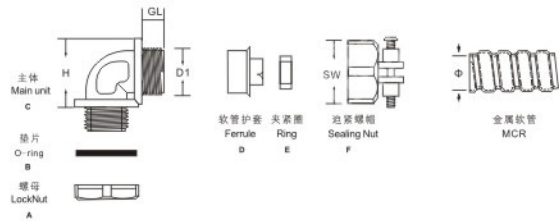

除以下标准规格外，可按要求任意变动螺纹大小及标准。
 Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 (英制) Order No.(G)	螺纹标准 (英制) Thread Standard(G)	配套金属软管 (公制) Metal Flexibe Conduit(M)	主体长度(mm) Main Unit Length	螺纹长度(mm) Thead Length	螺纹外径(mm) Thread O.D	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	G	Φ	H	GL	D1	SW	PCS
LNE-DWJD90-16-G1/2	G1/2	Φ16	36	11	21.3	30	50
LNE-DWJD90-20-G3/4	G3/4	Φ20	45	14	26.6	36	50
LNE-DWJD90-25-G1	G1	Φ25	52	15	33.4	43	20
LNE-DWJD90-32-G1-1/4	G1-1/4	Φ32	60	15	42.1	53	20
LNE-DWJD90-38-G1-1/2	G1-1/2	Φ38	68	16	47.8	60	10
LNE-DWJD90-51-G2	G2	Φ51	80	18	59.6	74	10

Zinc Alloy 45-Degree Double Locked Fitting


LNE-DWJD 锌合金双锁紧45度弯接头

技术参数

产品材质	A,C,F,I部位采用优质锌合金镀镍，D部位采用尼龙PA66制成，B,E,H采用丁腈橡胶,G为铁皮压铸制成。
螺纹规格	德制(PG)、英制(G)、美制(NPT)
工作温度	-40℃至+100℃，短时可达+120℃。
产品特性	1.外型美观、结构紧密、强度更高。 2.软管护套设计与软管相扣接紧之设计、配合近紧头装配省时便利，抗拉力强。 3.可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂。

Technical Parameters

Product material	A,C,F,I parts are zinc-nickel alloy .D part is Pa66, B,E,H parts are NBR,G is made of iron.
Specification of thread	PG,G,NPT
Temperature	-40℃ ~ +100℃, instantaneously can be +120℃
Property	Nice shape, compact structure, higher intensity; Flexible conduit Ferrule design make conduit connection tightly, easy assembly, and strong pull resistance. Water resistant, dust resistant, inactive with salts, acid and alkali resistance, alcohols, oils and greases as well as general solvent.

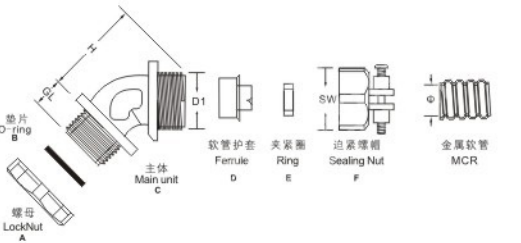

除以下标准规格外，可按要求任意变动螺纹大小及标准。
 Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 (英制) Order No.(G)	螺纹标准 (英制) Thread Standard(G)	配套金属软管 (公制) Metal Flexibe Conduit(M)	主体长度(mm) Main Unit Length	螺纹长度(mm) Thead Length	螺纹外径(mm) Thread O.D	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	G	Φ	H	GL	D1	SW	PCS
LNE-DWJD45-16-G1/2	G1/2	Φ16	36	11	21.3	30	50
LNE-DWJD45-20-G3/4	G3/4	Φ20	41	14	26.6	36	25
LNE-DWJD45-25-G1	G1	Φ25	52	15	33.4	43	20
LNE-DWJD45-32-G1-1/4	G1-1/4	Φ32	62	15	42.1	53	10
LNE-DWJD45-38-G1-1/2	G1-1/2	Φ38	68	16	47.8	60	10
LNE-DWJD45-51-G2	G2	Φ51	80	18	59.6	74	5

LNE-MBG 金属软管电缆接头

Cable Gland For Metal Flexible Conduit




技术参数

产品材质	A,C,F,I部位采用优质锌合金镀镍, D部位采用尼龙PA66制成, B,E,H采用丁腈橡胶,G为铁皮压铸制成。
螺纹规格	公制(M)、德制(PG)、英制(G)及美制(NPT)。
工作温度	-40℃至+100℃, 短时可达+120℃。
产品特性	1.外型美观, 结构紧密、强度更高。 2.软管护套设计与软管相扣接紧之设计、配合近紧头装配省时便利, 抗拉力强。 3.可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂。

Technical Parameters

Product material	A,C,F,I parts are zinc-nickel alloy .D part is Pa66, B,E,H parts are NBR,G is made of iron.
Specification of thread	Metric,PG,G,NPT
Temperature	-40℃ ~ +100℃, instantaneously can be +120℃
Property	Nice shape, compact structure, higher intensity; Flexible conduit Ferrule design make conduit connection tightly, easy assembly ,and strong pull resistance. Water resistant, dust resistant, inactive with salts, acid and alkali resistance, alcohols, oils and greases as well as general solvent.

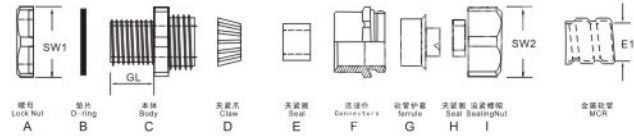

除以下标准规格外, 可按要求任意变动螺纹大小及标准。
Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 Order No.	配套金属软管 Matching metal Hose		螺纹标准(公制) Thread standard(M)	电缆外径 (mm) Cable Diameter	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench		包装单位(只/包) Packaging Unit
No.	公制(M) Φ	英寸(in.) Φ	M	E1	GL	SW1	SW2	PCS
LNE-MBG-M16x1.5-10	Φ10	1/4"	M16x1.5	4-8	7.0	24	20	50
LNE-MBG-M20x1.5-13	Φ13	3/8"	M20x1.5	8-12	8.0	26	24	50
LNE-MBG-M20x1.5-16	Φ16	1/2"	M20x1.5	8-12	8.0	28	24	50
LNE-MBG-M24x1.5-16	Φ16	1/2"	M24x1.5	10-14	10.0	28	28	50
LNE-MBG-M25x1.5-20	Φ20	3/4"	M25x1.5	11-16	11.0	35	30	25
LNE-MBG-M32x1.5-25	Φ25	1"	M32x1.5	15-22	11.0	42	35	20
LNE-MBG-M40x1.5-32	Φ32	1 1/4"	M40x1.5	22-28	12.0	50	45	10
LNE-MBG-M50x1.5-38	Φ38	1 1/2"	M50x1.5	28-36	13.0	57	55	10
LNE-MBG-M63x1.5-51	Φ51	2"	M63x1.5	37-44	14.0	70	70	5
LNE-MBG-M27x2.0-20	Φ20	3/4"	M27x2.0	13-18	11.0	35	32	25
LNE-MBG-M30x2.0-20	Φ20	3/4"	M30x2.0	14-20	11.0	35	35	25
LNE-MBG-M33x2.0-25	Φ25	1"	M33x2.0	15-22	11.0	42	37	20
LNE-MBG-M36x2.0-25	Φ25	1"	M36x2.0	18-25	11.0	42	40	20
LNE-MBG-M42x2.0-32	Φ32	1 1/4"	M42x2.0	24-30	13.0	50	50	10
LNE-MBG-M48x2.0-38	Φ38	1 1/2"	M48x2.0	25-32	13.0	57	53	10
LNE-MBG-M54x2.0-38	Φ38	1 1/2"	M54x2.0	32-38	14.0	57	57	10
LNE-MBG-M60x2.0-51	Φ51	2"	M60x2.0	37-44	14.0	70	70	5
LNE-MBG-M64x2.0-51	Φ51	2"	M64x2.0	37-44	14.0	70	70	5
LNE-MBG-M72x2.0-64	Φ64	2 1/2"	M72x2.0	42-52	15.0	85	80	5
LNE-MBG-M76x2.0-64	Φ64	2 1/2"	M76x2.0	48-55	17.0	85	85	5

Cable Gland For Plastic Flexible Conduit


LNE-MSD 塑料软管电缆接头

技术参数

产品材质	A,C,F,H部位采用优质锌合金镀镍, B,E,G部位采用丁腈橡胶制成, D部分采用尼龙PA66制成。
螺纹规格	公制(M)、德制(PG)、英制(G)及美制(NPT)。
产品颜色	A,C,F,H部位为金属色, B,E,G为黑色, D为白色。
工作温度	-40℃至+100℃, 短时可达+120℃。
产品特性	塑料软管接头配套锁式电缆接头为一体, 防电线松动, 装卸只需拔插无需工具, 大大缩减了安装时间, 夹紧电缆范围大, 抗拉力特强, 产品有耐酸碱、耐化学物质与一般溶剂等抗腐蚀性特性, 可防水、防尘全方位的尺寸可广泛应用于各个领域的出线孔上。

Technical Parameters

Product material	C,F,H parts are zinc-nickel alloy .B, E and G are Chemigum material,Part D is UL approved Nylon Pa66
Specification of thread	Metric,PG,G,NPT
Color	A,C,F,H parts are metallic,B,E,G are black, D is white.
Temperature	-40℃ ~ +100℃, instantaneously can be +120℃
Property	Cable Glands plus conduit connector as whole one, anti-loose for cable, Assembly and discharging work easy by just plugging without tools, greatly reducing the installation time.it can fit with wide range of fastening cable, feature with high tensile strength,acid and alkali resistant,corrosion resistant to generally chemicals and solvents, waterproof, dustproof, widely applied with various types of outlet hole.

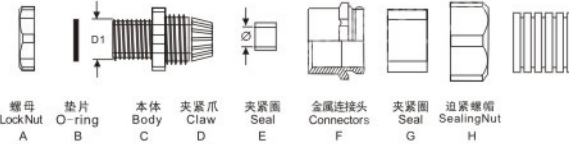

除以下标准规格外, 可按要求任意变动螺纹大小及标准。
Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 Order No.	螺纹标准(公制) Thread standard(M)	电缆外径(mm) Cable Diameter	适配软管 Suitable Flexible Conduit	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	M	Φ	AD	GL	SW	PCS
LNE-MSD-M12-10.0	M12x1.5	3-6.5	AD10.0	6.0	16.0	50
LNE-MSD-M16-13.0	M16x1.5	4-8	AD13.0	7.0	18.0	50
LNE-MSD-M16-15.8	M16x1.5	4-8	AD15.8	7.0	18.0	50
LNE-MSD-M18-15.8	M18x1.5	6-10	AD15.8	8.0	20.0	50
LNE-MSD-M20-15.8	M20x1.5	8-12	AD15.8	8.0	22.0	50
LNE-MSD-M20-18.5	M20x1.5	8-12	AD18.5	8.0	22.0	50
LNE-MSD-M20-21.2	M20x1.5	8-12	AD21.2	8.0	22.0	25
LNE-MSD-M25-21.2	M25x1.5	10-14	AD21.2	10.0	28.0	25
LNE-MSD-M25-28.5	M25x1.5	10-14	AD28.5	10.0	28.0	25
LNE-MSD-M27-28.5	M27x1.5	13-18	AD28.5	11.0	30.0	25
LNE-MSD-M32-34.5	M32x1.5	15-22	AD34.5	11.0	36.0	20
LNE-MSD-M40-34.5	M40x1.5	18-25	AD34.5	12.0	45.0	20
LNE-MSD-M40-42.5	M40x1.5	18-25	AD42.5	12.0	45.0	10
LNE-MSD-M50-54.5	M50x1.5	26-32	AD54.5	13.0	56.0	5
LNE-MSD-M63-54.5	M63x1.5	37-44	AD54.5	14.0	70.0	5

LNE-DPM 美标软管接头

American Standard Flexible Conduit Connector




技术参数

产品材质	锌合金
螺纹规格	公制(M)、英制(G)
工作温度	-20℃至+90℃
产品特性	软管护套设计与软管相扣接紧之设计，装配省时便利，抗拉力强，适配LNE-UL系列产品

Technical Parameters

Product material	Zinc Alloy
Specification of thread	Metric,G
Temperature	-20℃ ~ +90℃
Product Features	The design of the conduit sheath is closely connected to the conduit, making assembly convenient and providing strong tensile strength, suitable for LNE-UL series products

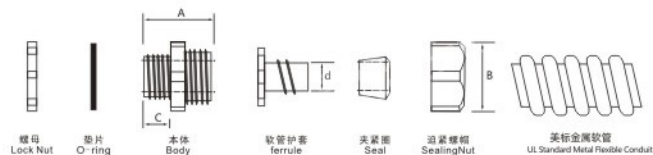

除以下标准规格外，可按要求任意变动螺纹大小及标准。
Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 Order No. No.	配套金属软管 Matching metal Hose 公制 (M)	配套金属软管 Matching metal Hose 英制 (G)	直径(约) Diameter(approx)				螺纹尺寸 Thread NPT
			d	A	B	C	
LNE-DPM-3/8	12	G3/8	10.5	32	34.5	11.5	NPT1/2
LNE-DPM-1/2	16	G1/2	13.8	32.5	34.5	12	NPT1/2
LNE-DPM-3/4	21	G3/4	18	34	41	12.5	NPT3/4
LNE-DPM-1	27	G1	24	42.5	47	15	NPT1
LNE-DPM-1-1/4	35	G1-1/4	32.5	49	59	17.5	NPT1-1/4
LNE-DPM-1-1/2	41	G1-1/2	37	49	65.5	17.5	NPT1-1/2
LNE-DPM-2	53	G2	48.5	51	78	17.5	NPT2
LNE-DPM-2-1/2	63	G2-1/2	59.5	74	97	25	NPT2-1/2
LNE-DPM-3	78	G3	74	81	115	25	NPT3
LNE-DPM-4	103	G4	97	89	139	29	NPT4

American Standard 90 Degree Connector


LNE-DWM 美标软管90度弯头

技术参数

产品材质	锌合金
螺纹规格	公制(M)、英制(G)
工作温度	-20℃至+90℃
产品特性	软管护套设计与软管相扣接紧之设计，装配省时便利，抗拉力强，适配LNE-UL系列产品

Technical Parameters

Product material	Zinc Alloy
Specification of thread	Metric,G
Temperature	-20℃ ~ +90℃
Product Features	The design of the conduit sheath is closely connected to the conduit, making assembly convenient and providing strong tensile strength, suitable for LNE-UL series products

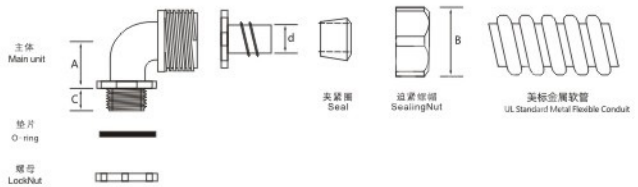

除以下标准规格外，可按要求任意变动螺纹大小及标准。
Besides the following specifications, the size and thread standard can be varied at your discretion as per requirements.

订货号 Order No. No.	配套金属软管 Matching metal Hose 公制 (M)	配套金属软管 Matching metal Hose 英制 (G)	直径(约) Diameter(approx)				螺纹尺寸 Thread NPT
			d	A	B	C	
LNE-DWM-3/8	12	G3/8	10.5	20	34.5	12.5	NPT1/2
LNE-DWM-1/2	16	G1/2	13.8	20	34.5	12.5	NPT1/2
LNE-DWM-3/4	21	G3/4	18	23	41	12.5	NPT3/4
LNE-DWM-1	27	G1	24	28	47	17	NPT1
LNE-DWM-1-1/4	35	G1-1/4	32.5	34	59	18	NPT1-1/4
LNE-DWM-1-1/2	41	G1-1/2	37	39	65.5	18	NPT1-1/2
LNE-DWM-2	53	G2	48.5	46	78	18	NPT2
LNE-DWM-2-1/2	63	G2-1/2	59.5	53	97	25	NPT2-1/2
LNE-DWM-3	78	G3	74	62	115	25	NPT3
LNE-DWM-4	103	G4	97	71	139	28	NPT4